UNITED STATES
EPARTMENT OF
OMMERCE
UBLICATION

NBS TECHNICAL NOTE 619

Millimeter Attenuation and Reflection Coefficient Measurement System

U. S.
PARTMENT
OF
OMMERCE
National

QC
100
U5753
no. 619
1972
C2

NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards[1] was established by an act of Congress March 3, 1901. The Bureau's overall goal is to strengthen and advance the Nation's science and technology and facilitate their effective application for public benefit. To this end, the Bureau conducts research and provides: (1) a basis for the Nation's physical measurement system, (2) scientific and technological services for industry and government, (3) a technical basis for equity in trade, and (4) technical services to promote public safety. The Bureau consists of the Institute for Basic Standards, the Institute for Materials Research, the Institute for Applied Technology, the Center for Computer Sciences and Technology, and the Office for Information Programs.

THE INSTITUTE FOR BASIC STANDARDS provides the central basis within the United States of a complete and consistent system of physical measurement; coordinates that system with measurement systems of other nations; and furnishes essential services leading to accurate and uniform physical measurements throughout the Nation's scientific community, industry, and commerce. The Institute consists of a Center for Radiation Research, an Office of Measurement Services and the following divisions:

Applied Mathematics—Electricity—Heat—Mechanics—Optical Physics—Linac Radiation[2]—Nuclear Radiation[2]—Applied Radiation[2]—Quantum Electronics[3]—Electromagnetics[3]—Time and Frequency[3]—Laboratory Astrophysics[3]—Cryogenics[3].

THE INSTITUTE FOR MATERIALS RESEARCH conducts materials research leading to improved methods of measurement, standards, and data on the properties of well-characterized materials needed by industry, commerce, educational institutions, and Government; provides advisory and research services to other Government agencies; and develops, produces, and distributes standard reference materials. The Institute consists of the Office of Standard Reference Materials and the following divisions:

Analytical Chemistry—Polymers—Metallurgy—Inorganic Materials—Reactor Radiation—Physical Chemistry.

THE INSTITUTE FOR APPLIED TECHNOLOGY provides technical services to promote the use of available technology and to facilitate technological innovation in industry and Government; cooperates with public and private organizations leading to the development of technological standards (including mandatory safety standards), codes and methods of test; and provides technical advice and services to Government agencies upon request. The Institute also monitors NBS engineering standards activities and provides liaison between NBS and national and international engineering standards bodies. The Institute consists of the following divisions and offices:

Engineering Standards Services—Weights and Measures—Invention and Innovation—Product Evaluation Technology—Building Research—Electronic Technology—Technical Analysis—Measurement Engineering—Office of Fire Programs.

THE CENTER FOR COMPUTER SCIENCES AND TECHNOLOGY conducts research and provides technical services designed to aid Government agencies in improving cost effectiveness in the conduct of their programs through the selection, acquisition, and effective utilization of automatic data processing equipment; and serves as the principal focus within the executive branch for the development of Federal standards for automatic data processing equipment, techniques, and computer languages. The Center consists of the following offices and divisions:

Information Processing Standards—Computer Information—Computer Services—Systems Development—Information Processing Technology.

THE OFFICE FOR INFORMATION PROGRAMS promotes optimum dissemination and accessibility of scientific information generated within NBS and other agencies of the Federal Government; promotes the development of the National Standard Reference Data System and a system of information analysis centers dealing with the broader aspects of the National Measurement System; provides appropriate services to ensure that the NBS staff has optimum accessibility to the scientific information of the world, and directs the public information activities of the Bureau. The Office consists of the following organizational units:

Office of Standard Reference Data—Office of Technical Information and Publications—Library—Office of International Relations.

---

[1] Headquarters and Laboratories at Gaithersburg, Maryland, unless otherwise noted; mailing address Washington, D.C. 20234.
[2] Part of the Center for Radiation Research.
[3] Located at Boulder, Colorado 80302.

National Bureau of Standards
OCT 18 1972
Not acc
QC100
.U5753
No 619
1972
C. 2

UNITED STATES DEPARTMENT OF COMMERCE
Peter G. Peterson, Secretary
NATIONAL BUREAU OF STANDARDS • Lewis M. Bronscomb, Director

NBS TECHNICAL NOTE 619

ISSUED JULY 1972

Not. Bur. Stond. (U.S.), Tech. Note 619, 175 poges (July, 1972)
CODEN: NBTNAE

Millimeter Attenuation and Reflection Coefficient Measurement System

B. C. Yates and W. Larson

Electromagnetics Division
National Bureau of Standards
Institute for Basic Standards
Boulder, Colorado

NBS Technicol Notes ore designed to supplement the Bureou's regulor publicotions progrom. They provide o meons for making availoble scientific dato thot ore of tronsient or limited interest. Technicol Notes moy be listed or referred to in the open literoture.

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402
(Order by SD Catalog No. C13.46:619). Price $1.50

Contents

		Page
	Abstract	1
1.	Introduction	1
2.	System Description and Measurement Procedures	2
	2.1 Magnitude of reflection coefficient	2
	2.1.1. Subsystem description	3
	2.1.2. Measurement procedure	4
	2.1.3. Brief modified reflectometer theory and tuning procedure	9
	2.2. Attenuation	13
	2.2.1. Subsystem description	13
	2.2.2. Measurement procedure	14
3.	Systematic Measurement Errors	15
	3.1. Reflectometer errors	16
	3.1.1. Tuning errors	16
	3.1.2. Precision Section error	18
	3.2. Attenuation errors	20
	3.2.1. Mismatch error	20
	3.3. System measurement errors - Attenuation and/or reflection coefficient magnitude	22
	3.3.1. Converter linearity error	22
	3.3.2. System instability error	23
	3.3.3. Leakage error	24
	3.3.3.1 RF Leakage	24
	3.3.3.2 Intermediate Frequency Leakage	26

3.3.4. Signal-to-noise error---------- 27

4. Standards---------- 28

4.1. Reflection coefficient magnitude standards---------- 28

4.2. Standard attenuator---------- 31

4.3. Interlaboratory standards---------- 32

4.3.1. Reflection coefficient---------- 32

4.3.2. Attenuation---------- 35

5. Measurement Results---------- 37

5.1. Reflection coefficient magnitude---------- 37

5.2. Attenuation---------- 39

Figures 1-21---------- 43-63

Appendix A. ---------- 64

Appendix B. Estimated systematic error limits for WR15 attenuation measurements---------- 66

Appendix C. Estimated systematic error limits for WR15 reflection coefficient magnitude measurements---------- 67

Figures 22-27---------- 68-96

Appendix D. Machine drawings for 11 stub tuner for 55-65 GHz, WR15--------- 68

Appendix E. Machine drawing for sliding load for WR15 waveguide---------- 72

Appendix F. Machine drawing for sliding dumbbell short for WR15 waveguide---------- 74

Appendix G. Machine drawings for four piece brass and invar precision waveguide for WR15-------- 76

Appendix H. Machine drawing for quarter-wave short circuit for WR15 waveguide---------- 80

Appendix I. Machine drawings for circular waveguide below-cutoff attenuator for nominal 30 MHz operation---------- 82

6. References---------- 97

LIST OF FIGURES

Figure 1. Block diagram of the reflection coefficient magnitude subsystem using an i-f receiver.

Figure 2. Detailed diagram of the reflection coefficient magnitude subsystem.

Figure 3. Detailed diagram of the two-loop automatic frequency control network.

Figure 4. Waveguide termination.

Figure 5. Diagram of a tunable, single-directional coupler reflectometer (modified reflectometer).

Figure 6. Block diagram of the i-f series substitution attenuation subsystem.

Figure 7. Detailed diagram of the rf receiver of the attenuation subsystem.

Figure 8. Graph for estimating the magnitude of 1/K given a response variation R when sliding a load with return losses of 30 to 70 decibels.

Figure 9. Graph for estimating the equivalent generator impedance for a given response variation $R \times 10^{-N}$ when sliding a short-circuit termination.

Figure 10. Change in reflection coefficient magnitude versus dimension change in the nominal waveguide width of 0.148 inch.

Figure 11. Change in reflection coefficient magnitude versus dimensional change in the nominal waveguide height of 0.074 inch.

Figure 12. Graph for estimating mismatch error limits when the attenuation and system VSWR are given.

Figure 13. Theoretical mixer power conversion non-linearity versus master-local oscillator power ratio.

Figure 14. Quarter-wavelength short-circuited waveguide standards.

Figure 15. Graph for estimating the change in reflection coefficient of a quarterwave short circuit versus conductivity confidence interval (the relative error substracted from unity).

Figure 16. Current distribution for a rectangular TE_{10} mode short-circuited waveguide.

Figure 17. Graph for estimating the change in reflection coefficient magnitude of a quarterwave short circuit versus dimensional deviation from height dimension of 0.074 inch.

Figure 18. Graph for estimating the change in reflection coefficient magnitude of a quarterwave short circuit versus dimensional deviation from nominal width dimension of 0.148 inch.

Figure 19. Waveguide-Below-Cutoff attenuator.

Figure 20. Typical change in narrow dimension of rectangular waveguide used for interlaboratory reflection standards.

Figure 21. WR15 reflectometer and associated support hardware.

Figure 22. Machine drawings for 11 stub tuner for 55-65 GHz, WR15.

Figure 23. Machine drawing for sliding load for WR15 waveguide.

Figure 24. Machine drawing for sliding dumbbell short for WR15 waveguide.

Figure 25. Machine drawings for four piece brass and invar precision waveguide for WR15.

Figure 26. Machine drawing for quarter-wave short circuit for WR15 waveguide.

Figure 27. Machine drawings for circular waveguide below-cutoff attenuator for nominal 30 MHz operation.

MILLIMETER ATTENUATION AND REFLECTION COEFFICIENT MEASUREMENT SYSTEM

B.C. Yates and W. Larson

Abstract

This paper presents the details to implement a WR15 attenuation and reflection coefficient magnitude measurement system. A discussion of precision and of systematic error is given along with equations for estimating limits of the error. Machine drawings are provided to fabricate the waveguide standards and necessary hardware not commercially available.

Key words: Attenuation; Measurement system; Millimeter; Reflection coefficient, VSWR.

1. Introduction

In the Electromagnetics Division of the National Bureau of Standards, Boulder, Colorado, work is proceeding toward the establishment and extension of calibration services at frequencies in the millimeter region. Among the work completed at this time is a system for the measurement of attenuation and reflection coefficient magnitude on waveguide devices in WR15 waveguide. The purpose of this report is to describe this calibration system and include the instrumentation, measurement procedure, and error analysis employed in the system development and evaluation.

2. System Description and Measurement Procedures

The system can be conveniently broken into two parts for the purposes of description and discussion. The part (subsystem) dealing with measurement of reflection coefficient will be described first.

2.1 Magnitude of Reflection Coefficient[1]

Immense improvements in reflectometer techniques over the past few years have made this method most accurate for the measurement of microwave and millimeter impedance (VSWR and reflection coefficient)[2] [1,2][3]. In particular, the

---

[1]The reflection coefficient Γ at a single frequency, and for a single mode of propagation having a sinusoidal time variation, is the ratio of the incident to reflected wave amplitudes at a given terminal plane in a uniform waveguide. The reflection coefficient is a complex number having both a modulus (magnitude) and argument (phase).

[2]The voltage standing-wave ratio (VSWR), in terms of the above-defined reflection coefficient, is given by the relation,

$$\text{VSWR} = \sigma = \frac{1 + |\Gamma|}{1 - |\Gamma|}$$

The converse relation (i.e., $|\Gamma|$ in terms of σ) is

$$|\Gamma| = \frac{\sigma - 1}{\sigma + 1}.$$

A more complete discussion of reflection coefficient and VSWR is given by Beatty [2].

Note: The symbol σ is widely used to denote conductivity, but is used in this note only to designate VSWR.

[3]Figures in brackets indicate the literature references at the end of this paper.

tuned modified reflectometer, a single directional coupler with associated waveguide tuners, offers the best performance and accuracy over a large dynamic range. Untuned reflectometer techniques [3] have also been developed which provide a reasonable accuracy.

2.1.1 Subsystem Description

Figure 1 is a block diagram of the reflection coefficient magnitude calibration subsystem presently in use at NBS. The measurement system incorporates two microwave oscillators, the master oscillator (MO) and the sawtooth-modulated local oscillator (LO). The MO is tuned to the calibration frequency and controlled with an AFC circuit. The LO center frequency is tuned to either 30 MHz above or 30 MHz below the MO frequency.

MO energy is propagated to the reflectometer where it is reflected from the item under test and is applied to a mixer. LO energy is also coupled directly to this mixer to produce an i-f response of 30 MHz. The i-f response is then transmitted through a monitor network, which also provides a ground return for the mixer diode, and into a 30 MHz waveguide below-cutoff (WBCO) piston attenuator. Next, the attenuator output is amplified, detected, and filtered. The filtered voltage is then applied to a monitor scope and a strip chart recorder. For a dynamic range greater than 40 dB, the sawtooth audio modulation is amplified following the i-f amplifier and synchronously detected.

Figures 2, 3, are more detailed diagrams of the system.

In order to provide a coherent scope response, system stability, and wide dynamic range, a sawtooth voltage is superimposed upon the LO repeller voltage to frequency modulate (± 2 MHz) the LO. If better system stability than the modulated method provides is required, the LO can be controlled by an AFC circuit to maintain the i-f center frequency at a fixed 30 MHz. This can be accomplished by employing a separate AFC loop such as shown in figure 3. For more detail on system stability see section 3.3.2.

2.1.2 Measurement Procedure

The measurement is performed by: 1) attaching the unknown test item, Γ_u, to the reflectometer, 2) adjusting the gain of the amplifier to obtain a convenient reference response on a recorder (meter), 3) replacing the test item by a reflection coefficient standard ($|\Gamma_s| \simeq 1$), and 4) adjusting the 30 MHz standard attenuator to obtain the original output on the recorder. The reflection coefficient magnitude can then be calculated by using the formula,

$$L_R = 20 \log_{10} \frac{|\Gamma_s|}{|\Gamma_u|}, \qquad (1)$$

where L_R is the measured relative return loss (the attenuation difference between $|\Gamma_s|$ and $|\Gamma_u|$). Tables are available to

facilitate the calculation of $|\Gamma_u|$ [4]. Alternately, $|\Gamma_u|$ can be calculated from the equations,

$$L_R = -20 \log_{10} |\Gamma| \tag{2}$$

and

$$|\Gamma_u| = |\Gamma_s| \cdot |\Gamma|. \tag{3}$$

When measuring terminations having a sliding load (fig. 4) as a terminating element, both the maximum and minimum reflection coefficients are measured. Usually the reflection coefficient of the termination is taken as the average of these measurements.

Terminations having a small reflection coefficient ($|\Gamma| \leq 0.01$) and a sliding load $|\Gamma_L|$ as a terminating element are difficult to measure. Since both reflections are small, it is not possible to immediately identify whether the average reflection coefficient $|\Gamma|_{ave}$ belongs to the sliding load or to a discontinuity (fig. 4) associated with the termination. (For the case ($|\Gamma| > 0.01$), $|\Gamma|_{ave}$ is equal to the reflection coefficient of the discontinuity $|\Gamma_D|$ (to an order of $|\Gamma_L|^2$) provided that $|\Gamma_D| > |\Gamma_L|$). This is because the average value of reflection coefficient is associated with that element which has the largest reflection (see Appendix A).

The usual method to separate the two reflection coefficients is to insert a low-loss discontinuity either inside the termination or attached to the waveguide flange of the

termination in order to provide a reflection which is large compared to that of the sliding load. A flat metal plate with dimensions smaller than nominal waveguide dimensions and which has a VSWR $\simeq$ 1.2 can easily be attached to the termination and also provide the necessary discontinuity. An alternate method is to use two different sliding loads inside the termination if it is physically practical.

The measurement procedure is to attach the plate to the termination, measure the maximum and minimum reflection coefficients as a function of the sliding load, and calculate the respective VSWR's, ${}^{d}\sigma_{max}$ and ${}^{d}\sigma_{min}$. (The d superscript is used here to denote the VSWRs measured with the discontinuity (plate) attached.)

The VSWR of the load σ_L is calculated from the equation [5]

$$\sigma_L = \sqrt{{}^{d}\sigma_{max} / {}^{d}\sigma_{min}}. \qquad (4)$$

Next, measurements of the maximum and minimum reflection coefficients are made with the discontinuity (plate) removed, and the maximum and minimum VSWRs (σ_{max} and σ_{min}) are calculated. Here, σ_{max} and σ_{min} are not to be confused with the VSWRs in eq. 4 but pertain only to the VSWRs with the discontinuity (plate) removed. Substitution of σ_{max} and σ_{min} into the equations,

$$\sigma_1 = \sqrt{\sigma_{max} / \sigma_{min}}, \qquad (5)$$

and

$$\sigma_2 = \sqrt{\sigma_{max}\ \sigma_{min}}, \qquad (6)$$

yields the VSWRs of the termination discontinuity and the sliding load where σ_1 and σ_2 are the VSWRs of the elements with the smallest and largest reflection, respectively. Comparison of eq. 5 and eq. 6 with eq. 4 removes the ambiguity as to which VSWR is associated with the sliding load and which VSWR is associated with the termination discontinuity.

When measuring terminations or nominally nonreflecting one-ports[4] which have a return loss greater than the dynamic range of the measurement system, other measurement procedures must be used. Four suitable techniques are described below. The last two methods to be described (rf and i-f substitution) can be also implemented for measuring attenuators over an extended attenuation range. Details on direct substitution attenuation measurements are given in reference [6]. All methods assume that adequate signal power is available.

The first method is to measure the return loss in two steps, first calibrating the reflection coefficient of a transfer standard having a return loss of about 32 dB ($|\Gamma|$ = 0.025) by the method described previously. Then, with the power level at the measurement port increased to compensate

[4]A nominally nonreflecting one-port is a termination which is intended to produce no reflection or nearly no reflection ($|\Gamma| \leq 0.001$).

for the return loss of the transfer standard (32 dB), the unknown $|\Gamma_u|$ is compared to the transfer standard. $|\Gamma_u|$ is calculated from eq. 1 where $|\Gamma_s|$ is the reflection coefficient magnitude of the transfer standard. Alternately, the return loss of the transfer standard can be added to the measured return loss to obtain the return loss of the unknown.

The second method utilizes a reflection coefficient standard that is fairly close in magnitude to the unknown termination. In this case only a relatively small return loss measurement which is within the dynamic range of the system need be measured. Some excellent possibilities of reflection coefficient standards of low VSWR are discussed in section 4.1.

The third method utilizes a calibrated rf attenuator isolated from and located between the generator and reflectometer. This method makes a direct comparison between the standard of reflection coefficient ($|\Gamma_s| \simeq 1$) and the unknown. When the unknown is compared to the standard, a portion of the substituted return loss is placed in the rf attenuator and a portion in the i-f 30 MHz standard attenuator and the losses summed. The unknown is calculated from eq. (1).

Since the rf attenuation in the third method is not always accurately known, the fourth procedure makes use of the i-f attenuator to determine the attenuation in the rf

attenuator. To do this the i-f attenuation is transferred to a second auxiliary rf attenuator. Next, the attenuation in the original (third method) rf attenuator is measured with the i-f attenuator. The sum of the two i-f attenuator losses is then used in eq. (1) to calculate $|\Gamma_u|$. Although this method is tedious, it has been found by experience to be more accurate than the third method.

2.1.3 Brief Modified Reflectometer Theory and Tuning Procedure

For the measurement procedures outlined previously to be valid, the output response from the modified reflectometer must be proportional to the reflection coefficient of the device located at the measurement plane. In order to obtain this output response, the imperfections in the directional-coupler-tuner assembly and the reflections from the equivalent generator are eliminated or minimized by appropriate tuning adjustments as will be described.

When a signal originating from the generator is incident on a device presenting a reflection coefficient, Γ_L, at terminal surface T_2 (fig. 5) in a reflectometer, a portion of the reflected signal is coupled to the output arm of the coupler. The output response b_3 can be expressed by the equation [1],

$$b_3 = c' \frac{\frac{1}{K} + \Gamma_L}{1 - \Gamma_{2i}\Gamma_L}, \qquad (7)$$

where Γ_{2i} is the reflection coefficient of the equivalent source impedance looking back from T_2 and

$$|K| \simeq |S_{21}| \; 10^{D/20} \tag{8}$$

D is the directivity of the reflectometer and the transmission coefficient, S_{21}, is defined as the ratio of the wave amplitude at T_2 to that at T_1 when T_2 is terminated by a nonreflecting device. S_{21} has magnitude values of approximately 0.707, 0.95, and 0.995 for a 3 dB, 10 dB, and 20 dB coupler, respectively. Thus, when employing a coupler with a directivity of 40 dB, $\frac{1}{|K|}$ is approximately 0.01 to 0.014 (3-20 dB coupler). These values of $\frac{1}{|K|}$ can be equal to or larger than $|\Gamma_L|$ so that from eq. (7) it can be seen that considerable error could result if the assumption were made that b_3 was proportional to Γ_L. In the denominator of eq. (7), the magnitude of $\Gamma_{2i}\Gamma_L$ is relatively small but still gives an appreciable error which will be discussed later.

Since both the directivity and Γ_{2i} errors are significant in the detected reading of the reflectometer, it is necessary to reduce their effects by appropriate tuning operations which are to raise the directivity of the reflectometer and to reduce Γ_{2i} to a negligible value. Reduction of Γ_{2i} to zero implies the elimination of multiple reflections at terminal plane, T_2. If one could make the directivity infinite and

$\Gamma_{2i} = 0$, eq. (7) would become

$$b_3 = c'\Gamma_L \tag{9}$$

In other words, the output would be directly proportional to the reflection coefficient of the device connected to T_2, and the ratio of the $|b_3|$ response from the device to the response from a standard of reflection coefficient would give the proper value of Γ_L (see eq. (1)). Although in principle these conditions are realizable, in practice it is possible only to approach them. However, one can approach them so nearly that only a small residual error remains. This deviation from perfect tuning conditions causes what is called the tuning error. The section on measurement errors gives the formulas to calculate the limits of tuning error. For a more detailed discussion of tuning theory see [1,2].

Various techniques can be employed in raising the directivity of the reflectometer and reducing Γ_{2i} to a negligible value. The individual techniques which are preferred by most metrologists are reviewed here.

The directivity of the reflectometer is raised by inserting a sliding load of small reflection coefficient (VSWR of 1.01 to 1.001) into the uniform precision waveguide (fig. 5) and adjusting tuner A for a null response at the detector. (It is possible to obtain a false tuning adjustment

if the null is not obtained first). Next, while the sliding load is moved (at least a half wavelength) to obtain the maximum-minimum variations, tuner A is adjusted to make these variations as small as possible. Usually a variation of 0.5 to 1 dB is considered satisfactory.

After making the directivity adjustment, a sliding short circuit is substituted for the sliding load in the precision waveguide to make the Γ_{2i} adjustment. Tuner B is adjusted to minimize variations in $|b_3|$ in the same manner as tuner A except that a detector null is not obtained originally. The adjustment is usually continued until the Γ_{2i} variation is less than 0.005 dB. An automated carriage has been devised to facilitate the tuning procedures [7] and its use or a similar device is highly recommended for tuning at millimeter frequencies.

It is always necessary to repeat the directivity adjustment (tuner A), after adjusting tuner B, but the Γ_{2i} adjustment (tuner B) usually need not be repeated again if the output variation is reduced to 0.002 dB or less originally. These adjustments should provide the necessary conditions that the output signal is proportional to the reflection coefficient of the device at T_2, so that the measurement methods outlined can be used.

Machine drawings for fabricating the tuners, sliding load, and sliding short are given in Appendices D, E, and F respectively.

2.2 Attenuation[5]

The i-f substitution technique is most widely accepted as the most accurate and most versatile method of performing attenuation measurements over a wide range of frequencies. Several system configurations are possible with this measurement technique [6]. The most commonly used is the series i-f substitution system shown in figure 6 and described below.

2.2.1 Subsystem Description

The basic series i-f substitution system for measurement of attenuation incorporates the hardware of the reflection coefficient subsystem; the insertion point for attenuators being located at the terminal plane for reflection coefficient measurements. The reflectometer provides a "matched generator" and is also used to tune the receiver port so that there are no multiple reflections between the input and output ports of the device-under-test and the system into which it is inserted.

[5]Attenuation is a general transmission term used to denote a decrease of signal magnitude, usually resulting from either a dissipative or reflective loss. In this note, the term attenuation also implies a non-reflecting system at the place where the attenuator is inserted.

A signal from the MO is propagated through the reflectometer and device-under-test (insertion point) and frequency converted (heterodyned) to 30 MHz by mixing with the LO. After the 30 MHz signal is attenuated by the WBCO standard attenuator, it is amplified, detected and displayed on a monitor scope and chart recorder.

With this system configuration a change in attenuation (e.g., an increase) in the device-under-test requires a corresponding change (decrease) in the WBCO attenuator. Thus, this configuration is called a series i-f substitution system.

2.2.2 Measurement Procedure

Preparatory to making a measurement the reflectometer in the RF source portion of the waveguide system is tuned by the procedures outlined in section 2.1.3 in order to present a matched generator to the test device. The RF detector section (fig. 7) contains a precision waveguide and a waveguide tuner which is the output port of the insertion point. After the reflectometer is properly tuned, the insertion point is closed and aligned. The waveguide tuner in the RF detector section is then adjusted for a reflectometer null response (i.e., no i-f detector response). This completes the tuning adjustments necessary to present the device-under-test with a matched insertion point.

The measurement is performed by: 1) inserting the device under test into the system at the insertion point, 2) adjusting the gain of the i-f amplifier to obtain a convenient detected reference response on a recorder (meter) (Note: when measuring variable attenuators, the gain is adjusted with the rf attenuation inserted), 3) removing the rf attenuation, and 4) substituting i-f attenuation from the WBCO standard to restore the detected response to the reference value to obtain a direct measure of the rf attenuation.

When setting either the standard or a rotary vane attenuator, the dial should always be turned in the direction of increasing attenuation to avoid backlash effects from the gear mechanisms.

Alternate methods for making attenuation measurements when the dynamic range of the detector system is exceeded are described in section 2.1.2.

It should be noted that alignment of the flanges between the device-under-test and the insertion point should be as exact as possible in order to obtain repeatable measurements.

3. Systematic Measurement Errors

The discussion of the limits of systematic measurement errors encountered is divided into three parts. The first part deals with errors in the measurement of reflection coefficient. The second part deals with errors due to mismatch

in measuring the attenuation. And the third part deals with errors common to the measurement of both attenuation and reflection coefficient. Estimated systematic error limits for NBS WR15 components and systems are summarized in appendices B and C.

3.1 Reflectometer Errors

3.1.1 Tuning Errors

Evaluation of the tuning errors in a tuned reflectometer is very important. Since the ideal conditions of $K = \infty$ and $\Gamma_{2i} = 0$ will not be realized in practice, the relation $b_3 = c'\Gamma_L$ will not be exact, and a residual error is present in the measurement.

The maximum relative error in an unknown test item, $|\Gamma_u|$, due to $K \neq \infty$ and $\Gamma_{2i} = 0$ is given by the equation,[6]

$$\frac{|d\Gamma_u|}{|\Gamma_u|} \leq \frac{1}{|K|} \frac{|\Gamma_S| + |\Gamma_u|}{|\Gamma_u\Gamma_s| - \left|\frac{\Gamma_u}{K}\right|} \tag{10}$$

where $|K|$ is approximated by eq. 8 and $|\Gamma_s|$ is the reflection coefficient magnitude of the standard.

To obtain the approximate magnitude of K, a load of small known reflection coefficient, Γ_L, is placed in the precision waveguide section and its phase is varied by sliding it more than one-half wavelength. Next, the attenuation difference, R, in decibels between maximum and minimum output

[6]Equation (10) contains a typographical error in reference [2].

signal variation is noted. This is the variation observed when raising the directivity of the reflectometer (section 2.1.3). Then, $|K|$ is calculated from the equation,

$$|K| = \frac{10^{R/20} + 1}{(10^{R/20} - 1)|\Gamma_L|}. \tag{11}$$

The estimation of $1/|K|$ is facilitated by figure 8.

A typical value that can be obtained when sliding a load ($|\Gamma_L| = 0.001$) is R = 0.5 dB so that $|K| \simeq 3.5 \times 10^4$. This corresponds to raising the directivity of the reflectometer to greater than 90 dB. At millimeter wave frequencies 80 dB is usually the upper directivity limit that can be maintained for a three to four hour time interval without readjustment, while 90 dB can be maintained over the same interval for microwave frequencies.

The maximum relative error due to $\Gamma_{2i} \neq 0$ but $K = \infty$ is given by the relation,[7]

$$\frac{|d\Gamma_u|}{|\Gamma_u|} \leq \frac{(|\Gamma_u| + |\Gamma_s|)|\Gamma_{2i}|}{1 - |\Gamma_{2i}\,\Gamma_u|}, \tag{12}$$

where $|\Gamma_{2i}|$ is obtained from the equation,

$$|\Gamma_{2i}| = \frac{10^{R/20} - 1}{(10^{R/20} + 1)|\Gamma_L|} \tag{13}$$

in which R is now the output dB variation observed when a short circuit ($|\Gamma_L| \simeq 1$) is slid more than one-half wavelength. Typical values are $|\Gamma_L| = 0.996$, and R = 0.003 so that

[7]Equation (12) contains a typographical error in reference [2].

$|\Gamma_{2i}| \simeq 0.0002$. The estimate of $|\Gamma_{2i}|$ is facilitated by figure 9.

The above results should not be difficult to obtain provided good tuners and reasonable system stability are available. As a word of caution, the tuning conditions are sharply frequency sensitive and cannot be accurately maintained unless the master oscillator is frequency controlled.

Equations (10), (11), (12), and a form of (13) were presented in reference [2].

3.1.2 Precision Section Error

Although the precision section of waveguide used in the reflectometer is carefully constructed and considered to be a standard transmission line, and thus could be discussed in the section on standards, it is also an integral part of the reflectometer. Thus, the errors associated with that waveguide section are presented here.

A major portion of the reflectometer error is caused by the cross-sectional deviation of the precision section from standard waveguide dimension. It should be noted that this particular error is the limiting factor in obtaining better accuracy in waveguide impedance measurements, because it is possible to reduce the tuning errors to a value much smaller than the precision section error. Although present fabrication techniques make possible a waveguide tolerance of ± 50 microinch, this error can be significant. The quoted limit of

error from this source may be actually too conservative, and a future reduction may be possible if and when a more rigorous mathematical analysis of this type of problem can be performed.

The residual reflection coefficient magnitude caused by dimensional deviations Δa and Δb in the a and b dimensions respectively, is given by the formula,

$$\Delta\Gamma = 2\left[\left(\frac{\lambda_g}{\lambda_c}\right)^2 \frac{|\Delta a|}{4a} + \frac{\sigma}{(1+\sigma)^2}\frac{|\Delta b|}{b}\right], \qquad (14)$$

where

a = the broad waveguide dimension,

b = the narrow waveguide dimension,

λ_g = the guide wavelength,

λ_c = the cutoff wavelength,

σ = the measured VSWR of the item under test. (Not to be confused with conductivity of the metal).

This formula considers only the change in characteristic impedance of the waveguide. Also, the respective error terms are derived while holding the other waveguide dimension constant at the nominal dimension. The "a" dimension error term is believed correct to 2 percent. The "b" dimension is correct to 1 percent for VSWR's less than or equal to 1.1 and varies to 10% for VSWR's of 2. Graphs of the respective errors for WR15 waveguide are given in figure 10 and figure 11.

Another possible error is due to the fact that the inside corners of the waveguide are filleted and not sharp.

The reflection from the junction of standard rectangular waveguide to filleted waveguide has been derived [8] and is given by the expression,

$$\Delta\Gamma = \left(\frac{\lambda_g R}{a}\right)^2 \cdot \frac{4 - \pi}{8ab} \tag{15}$$

where R is the radius of curvature of a filleted corner and the other parameters are as given for the previous equation.

Machine drawings for fabricating brass and invar precision waveguide sections are given in Appendix G.

3.2 Attenuation Error

3.2.1 Mismatch Errors

The error due to mismatch must be considered in making attenuation measurements because the attenuator is not always inserted in a perfectly matched system.

The attenuation difference of a variable or rotary-vane attenuator is measured by moving the vane from a zero or reference angular position to the desired vane angle or attenuation. The mismatch error [9] is expressed for the attenuation difference measurement by the equation,

$$\varepsilon(\text{dB}) = 20 \log_{10} \frac{|(1 - {}^{(f)}\Gamma_{i}\Gamma_{g})(1 - {}^{(f)}S_{22}\Gamma_L)|}{|(1 - {}^{(i)}\Gamma_{i}\Gamma_{g})(1 - {}^{(f)}S_{22}\Gamma_L)|} \tag{16}$$

where the frontscripts (i) and (f), refer to the initial and final values, respectively, and Γ_i is the input voltage reflection coefficient of the variable attenuator when the attenuator is terminated with a load (receiver) of reflection coefficient, Γ_L. Γ_g is the reflection coefficient of the generator, and S_{22} is the reflection coefficient at the output port when the input port is terminated with a load $|\Gamma_L| = 0$.

For insertion loss measurement of a fixed attenuator the mismatch error [6] is given by the equation,

$$\varepsilon(\text{dB}) = 20 \log_{10} \frac{|(1 - S_{11}\Gamma_g)(1 - S_{22}\Gamma_L) - S_{12}S_{21}\Gamma_L\Gamma_g|}{|1 - \Gamma_g\Gamma_L|}, \quad (17)$$

where S_{11} is the attenuator input reflection coefficient, and S_{12} and S_{21} are the attenuator transmission coefficients. Figure 12 can be used to quickly estimate the mismatch error for fixed attenuators having attenuation of 20 dB or more. A typical value of mismatch error is approximately 0.008 dB for WR15 attenuators (fixed or variable) with a system VSWR of 1.02 at the insertion point. The magnitude of this error is approximately 50 percent of the total systematic error for attenuation measurements from zero to 30 dB, and approximately 20 percent for a 50 dB measurement (see also Appendix 3).

3.3 System Measurement Errors -- Attenuation and/or Reflection Coefficient Magnitude

3.3.1 Converter Linearity

A knowledge of the degree of linearity of the power conversion of the mixer is essential in the i-f measurement system. When using a diode mixer in heterodyne receivers, nonlinearity is always present. This nonlinearity is a function of the ratio of the local oscillator power to the master oscillator power. Empirically, it has been shown in the NBS WR15 waveguide system that a 27 dB ratio (i.e., the MO power 27 dB down from the LO power) will give a nonlinearity less than 0.003 dB over the measurement range of 0-50 dB when the LO power is set at 2-3 mW at the mixer. The deviation from linearity is reduced when the signal power in the mixer is decreased relative to the local oscillator power. These results are in good agreement with the theory [10] (see figure 13).

In practice, the degree of linearity is established by measuring the same known attenuation step (e.g., 5 or 10 dB) at various power levels over the required measurement range. The difference between the measured value at the higher level and the value of attenuation at low levels, ΔdB (decibel), is the converter nonlinearity.

The relative error in reflection coefficient magnitude due to nonlinearity is calculated from the formula,

$$\frac{|\Delta\Gamma|}{|\Gamma|} = 0.115\ \Delta\text{dB} \qquad (18)$$

where ΔdB (decibel) is the deviation from linearity. The error for an attenuation measurement is ΔdB.

3.3.2 System Instability

Instability errors caused by power or frequency fluctuations are dependent on the particular generators, amplifier, detectors, power supply, and frequency stabilizer used and cannot be predicted in advance for a particular system. The variation of the output signal from an average power level can be held to less than ± 0.1 dB with a stable power supply and water cooling of the rf source (klystron). Phase locking the signal klystron to a stable source operating at a lower frequency (fig. 3) can hold the i-f output level fluctuations to approximately ± 0.005 dB for a 30-60 second interval. The two-loop AFC used here accomplishes this stability with only a water-cooled LO. When the two-loop AFC was applied to the LO also, the stability was held to better than ± 0.002 dB for a 1-2 minute interval. Frequency stability of this system (WR15) is approximately 1-2 kHz short-term and 5-10 kHz daily drift.

Instability errors are usually treated as random errors of measurement, a value being assigned after several hundred random measurements are made. When only a few measurement data are available, the error is formulated from eq. (18).

Connect-disconnect instabilities and repeatabilities of flanges, attenuators, and terminations are discussed in Section 5.1 and 5.2.

3.3.3 Leakage

3.3.3.1 RF Leakage

The effect of rf leakage becomes noticeable and increases the measurement error when measuring an attenuation ratio of 35-40 dB or more. This applies to a typical system where no special precaution has been made to control the leakage. The maximum attenuation error can be computed from the equation [11],

$$\Delta dB = 20 \log_{10} \left(1 \pm \sqrt{\frac{P_L}{P_S}} \right) \tag{19}$$

where P_S and P_L represent the signal power and leakage power, respectively. The reflection coefficient error is given by applying the results of eq. (19) to eq. (18).

In practice eq. (19) is not easily utilized, because an accurate measure of the leakage power cannot be made, but it can be applied to yield approximate error limits. A suggested method is to use a RF receiver (e.g., the attenuation

LO receiver) with an incorporated dial readout attenuator attached. This receiver is mobile enough to be placed near possible sources of leakage and can give an indication of the leakage signal. The receiver can be "calibrated" by the usual attenuation measurement system.

The leakage can be eliminated or minimized by several trial-and-error techniques. Placing the signal sources in shielded containers will usually sufficiently reduce this leakage source. Waveguide joints can be wrapped with steel wool or metal foil, and polytetrafluoroethylene-metal gaskets [12] have been used at microwave frequencies. Also, if the system is of a permanent nature, painting joints with a solution containing a high silver content will eliminate the leakage. Unfortunately, a major source of leakage may be the test item (e.g., a rotary vane attenuator). In the case of some commercial attenuators, the leakage power is down only 40 dB from the incident power in the waveguide and it is rarely down more than 60 dB. Fabrication techniques for NBS rotary-vane attenuators using absorbing material have been devised to reduce the leakage to more than 120 dB below the incident power [13]. Leakage in an NBS fabricated WR15 rotary-vane attenuator was shown to be at least 80 dB below the incident power.

3.3.3.2 Intermediate Frequency Leakage

I-f leakage is present around the standard attenuator, i-f amplifier, converter, and the associated i-f coaxial cables. The leakage from the standard attenuator can be contained by proper fabrication techniques. The i-f amplifier should be placed in a shielded container which has filtered power input connectors. The coaxial cable connector leakage can be reduced by wrapping the joint with lossy cloth and metal foil, but the suggested procedure is to use a conductive silver paint on threaded connectors and pack metal foil around the outer walls of BNC type connectors.

A field strength meter and probe or alternately an additional i-f receiver can be used to detect this type of leakage.

If the i-f leakage cannot be controlled adequately (30-50 dB range), a rf substitution in conjuction with the i-f substitution (similar to the method used for nonreflecting terminations (see Section 2.1.2)) will usually overcome the problem, since the signal power will be much larger than the leakage power. Although this method requires an additional calibration, it may yield a more accurate attenuation measurement. The technique is to remove approximately 20-25 dB of attenuation from the attenuator which holds the MO-LO 30 dB ratio (for power linearity) to an auxiliary attenuator. The unknown item is then calibrated by using the attenuations of the rf and i-f attenuators.

At least 20-25 dB (the amount removed previously) must be measured by the rf attenuator. If the i-f leakage cannot be reduced to a negligible amount, an estimate of its ΔdB attenuation change can be treated as a systematic error as in the case of rf leakage.

3.3.4 Signal-to-Noise Error

In the series i-f substitution system used at NBS, it has been demonstrated experimentally that attenuation measurement error due to noise is not significant. This is because the principal noise present in the 30 MHz detection system originates from the i-f amplifier and not the mixer. Thus, since the i-f amplifier receives a constant signal level from the 30 MHz attenuator, as is the case with the series i-f substitution, no apparent signal-to-noise error arises. The latter statement assumes a 50 dB range only. (There may be some range greater than 50 dB where the mixer noise dominates).

An error due to noise that may be significant is that due to loss of readout resolution (i.e., the true signal level is not readily determined from the random variations caused by noise). This problem can usually be corrected by using a long time-constant filter after the amplifier detector when measuring over a dynamic range of 0-50 dB. Also, the resolution can be improved by increasing the signal power and using the i-f and rf substitution technique described previously.

The measurement error from random variations due to a small signal-to-noise ratio is the observed readout variation in decibels for attenuation measurements, and the associated reflection coefficient error is given by eq. (18).

4. Standards

4.1 Reflection Coefficient Magnitude Standards

The standard of reflection coefficient used for impedance measurements at NBS is the quarter-wavelength short-circuited waveguide, more commonly called the quarter-wave short circuit (fig. 14).

The main advantages of this type of standard are: 1) the reflection coefficient magnitude can be calculated from derived formulas given in references [14], [15] if conductivity or attenuation measurements [16], [17] of the waveguide are available. Relatively crude measurements of conductivity will suffice to obtain the reflection coefficient to excellent accuracy (fig. 15). For example, a 20 percent error in the conductivity measurement will result in only a 0.015 percent error in the standard; 2) the axial component of current vanishes a quarter-wavelength from the shorting plate (fig. 16) which makes the dissipative loss in the waveguide joint negligible; and 3) small dimensional variations in the waveguide cross section have a negligible effect on the reflection coefficient. An increase in height of 0.001 inch causes 0.0008

percent change in reflection coefficient (fig. 17) at 62.5 GHz; an increase in width of 0.001 inch causes approximately a 0.001 percent change at the same frequency (fig. 18). NBS short circuits are fabricated from electroformed silver or copper to a tolerance of ± 0.0002 inch for the narrow and wide waveguide dimensions.

The critical dimension of a short circuit is the length (ideally a quarter wavelength). The length of the short circuit must be accurately dimensioned in the fabrication process in order to achieve the vanishing of the axial component of current at the connector surface. If the electrical length is different from that at the design frequency, current will flow across the discontinuity and result in a loss of power, so that the reflection coefficient will be less than the calculated value.

The proper length of the short circuit corrected for the change in phase factor due to guide attenuation [18] is given by the equations,

$$\ell = \frac{1}{(1 + \alpha_m/\beta)} \left\{ \frac{\lambda_g}{4} - \frac{\alpha_m}{\beta} \ell_{ep} \right\} \tag{20}$$

and

$$\ell_{ep} = \frac{b(\lambda/\lambda_g)^2}{[2(b/a)(\lambda/\lambda_c) + \varepsilon_r]} \tag{21}$$

where:

α_m = the measured waveguide attenuation constant,

$\beta = \frac{2\pi}{\lambda_g}$ = the wave phase factor,

λ_g = the guide wavelength,

λ_c = cutoff wavelength,

λ = free space wavelength,

b = narrow inside dimension of waveguide,

a = broad inside dimension of waveguide,

and ε_r = relative dielectric constant of the laboratory environment.

The reflection coefficient magnitude ($|\Gamma_s|$) is given by the equation,

$$|\Gamma_s| = 1 - 2\alpha(\ell + \ell_{ep}). \tag{22}$$

The attenuation constant is obtained by comparing the change in attenuation between a quarter-wave short circuit and a five-quarter-wave short circuit which is designed to operate at mid-frequency (mid-frequency is not essential) of the particular waveguide band. The attenuation at other frequencies in the particular waveguide size is given by the equation,

$$\alpha = \alpha_m \left(\frac{f}{f_m}\right)^{3/2} \left[\frac{\varepsilon_r + 2(b/a)(\lambda/\lambda_c)^2}{\varepsilon_r + 2(b/a)(\lambda_m/\lambda_{cm})^2}\right] \left(\frac{\lambda_g}{\lambda_{gm}}\right)^2 \tag{23}$$

where the m-subscripted parameters correspond to the parameter wavelength values at the mid-frequency f_m.

The reflection coefficient magnitude measurement error due to the quarter-wave short circuit is directly related to the error of the standard. In other words,

$$\frac{|d\Gamma|}{|\Gamma|} = \frac{|d\Gamma_s|}{|\Gamma_s|}.$$

The fractional error in the reflection coefficient of the NBS quarter-wave short circuits is estimated to be less than ± 0.03 percent.

Machine drawings for fabricating quarter-wave short circuits are given in Appendix H.

The previous discussion on quarter-wave shorts does not mean to imply that other reflection coefficient standards could not be fabricated in WR15 waveguide. Examples of several possibilities are half-round inductive obstacles [18, 19], waveguide irises, inductive and capacitive posts [20, 21] and waveguide holes [22].

4.2 Standard Attenuator

The IF substitution method has been used at NBS for comparison of attenuation difference and insertion loss in waveguide sizes WR28 to WR430 for many years. This method employs a waveguide below-cutoff (WBCO) attenuator operating at the selected frequency of 30 MHz. The WBCO is a continuously variable attenuation standard whose incremental attenuation may be closely predicted from a knowledge of its waveguide dimensions [23]. If the waveguide section is uniform, nearly lossless, and excited sinusoidally in only one mode, the field decays exponentially along the waveguide in a predictable manner.

Thus, a probe or pickup coil which is moved a known distance (with respect to an excitation coil) along the waveguide axis causes a calculable change in insertion loss. If certain constraints are applied regarding frequency of operation, resistivity of the waveguide, and the waveguide dimensions, the attenuator will constitute a nearly ideal standard.

Grantham and Freeman have published detailed theoretical factors affecting the design of the WBCO attenuator and its use as a standard attenuator [24]. The NBS Monograph 97 [6] treats the WBCO for general considerations, dimensional tolerances and accuracy of measurement of displacement, skin depth corrections, loading effects, and mode purity.

The errors in the NBS WBCO attenuator is estimated to be within 0.002 dB + 0.002 dB/20 dB. The error in reflection coefficient magnitude is given by application of eq. (18).

The machine drawings required to reproduce the NBS model VII WBCO standard attenuator are included in Appendix I.

Figure 19 is a photo of an NBS WBCO attenuator.

4.3 Interlaboratory Standards

4.3.1 Reflection Coefficient

The most frequently encountered type of interlaboratory standard (fig. 20) uses a change in height of the narrow waveguide dimension to achieve a calculable reflection coefficient. The ratio of waveguide heights is closely equal to the VSWR for

ratios less than 1.5. The frequency characteristic of this type of device is dependent on the capacitive effect of the waveguide discontinuity, but it is of second order. Formulas are available [20] for the capacitive correction terms. Thus, this type of standard has the desirable qualities of being more broadband than most types and having a calculable reflection coefficient. This type of device usually incorporates a low-reflection sliding load to terminate the structure.

Caution should be observed when selecting interlaboratory standards for measurement purposes. Two of the main sources of trouble in a poor quality standard are nonflatness of the connector (flange) surface (see fig. 4) and mechanical and electrical instability of the sliding load incorporated in the reflector.

A connector (flange) surface which has protrusions, bent surfaces or separated seams (where the device is fabricated from 2-4 separate pieces) does not mate properly so that there is excessive joint loss and leakage which will change with use of the standard, thereby changing the measured value. Another disadvantage of joint loss is the increased leakage signal which can effect the measurement accuracy. Also, protrusions on the connector (flange) surface can damage the fine surface finish of a precision waveguide section which will degrade the accuracy of the measurement system.

The electrical instability of the sliding load is the most common flaw in an otherwise good standard. It is possible to overcome this fault by improving the mechanical fit between the shaft and the shaft hole, or by providing a better sliding fit between the load supporting mechanism and the waveguide. The recommended procedure is to mount a pyramidal taper on a block which has teflon guides that provide a close fit with the waveguide walls. Both the taper and the block should be made from an rf absorbing material. If properly constructed, the electrical instability is virtually eliminated.

Other qualities to be considered in selection of a standard are: 1) accessibility to the reverse side of the connector (flange) surface to provide fast connect/disconnect, and 2) sturdy construction to eliminate flexing of the flange and associated waveguide.

Cautions to be observed before and after calibration are: 1) Inspect for flat front and reverse connector (flange) surfaces. This includes removal of paint and uneveness on the reverse side which can cause different pressures to be applied to the mating surface, 2) inspect interior waveguide walls for freedom from dust and lint, and 3) inspect connector surfaces for freedom from grease and corrosion.

4.3.2 Attenuation

There are two basic types of rf attenuation interlaboratory standards, the fixed attenuator [25] for insertion loss and the variable attenuator for attenuation difference.

There are two designs of variable attenuators that are suitable for calibration. One type has a resistive vane which moves into the waveguide field from a side wall. The other type is the rotary-vane attenuator. Both types of attenuators have good resolution at low values of attenuation, but the rotary-vane attenuator has superior resolution at high values as compared to the first type. The rotary-vane attenuator is less frequency-sensitive and has less incremental phase change than the other type.

The rotary-vane attenuator which basically consists of a dissipative vane rotated in a circular waveguide is the preferred variable attenuation interlaboratory standard. It has the property that the "ideal" attenuation can be calculated by the expression

$$A = -40 \log \cos \theta + c \qquad (25)$$

where θ is the angle between the rotating vane and the polarization of the circular TE_{11} mode, and c is the residual attenuation when $\theta = 0$.

Equation (25) is ideal because fabrication imperfections can cause deviations in actual attenuation for a known vane angle θ. Among the factors causing these deviations are

mismatch, misalignment of the rotating vane, insufficient attenuation of the vane, imperfections in the gear drive mechanisms, readout parallax, and a warped vane. Vane alignment techniques have been developed to reduce the errors from stator and rotating vane misalignment [26, 27, 28]. Likewise, fabrication techniques have also been improved so that the mechanical and physical imperfections are minimized [13].

Two main types of single-value attenuators are the fixed pad and the single-step attenuator. The disadvantage of the fixed pad is that it must be inserted and removed during a calibration, thus requiring good system stability and a repeatable connect-disconnect system assembly (see Section 5.2 for measurement results).

The step attenuator can remain in the system during its operation and thus overcomes the disadvantage of the fixed pad if its mechanical characteristics are stable and repeatable. The step attenuators usually consist of a movable resistive vane located between the two sets of coupling holes of an in-line directional coupler. When the vane is located in the center of the waveguide, energy is transmitted through the device via the coupling path, thus being attenuated in proportion to the design coupling factor. When the vane is located in the minimum electric field (against the wall) only a small residual attenuation results. Thus, with this device a fixed attenuation step can be measured without insertion and removal of the device. Other advantages of this device

are low VSWR and minor frequency sensitivity.

Precision calibrated attenuators used as interlaboratory standards require careful handling and should meet the following criteria to give satisfactory results. They should:

1) be electrically stable over several years time,
2) be mechanically rugged so that the electrical characteristics do not change through handling,
3) be electrically stable under environmental changes such as temperature, humidity, etc.,
4) be electrically stable for reasonable overloads (power),
5) have a VSWR of less than 1.2 (the nearer to 1.00, the better),
6) have input and output waveguide ports that are axially in line,
7) have a small to negligible leakage power, and
8) have excellent flanges or connector surfaces.

A more complete discussion of the above is found in reference [6].

5. Measurement Results

5.1 Reflection Coefficient Magnitude

Measurements were performed on two WR15 waveguide reflectors which were manufactured at the NBS. The reflection coefficient magnitudes were approximately 0.1 and 0.024. The devices

were measured each day for 10 days in order to obtain preliminary information on the standard deviations of individual runs (flange repeatability) and of day to day measurements (system random error).

The 0.024 device was made with a standard UG-385/U flange and the 0.1 device was made with a flat (non-bossed) mating surface. The waveguide precision section to which the devices were joined is a flat surface. Alignment pins were used on both flanges.

The results show that the device with the flat flange is more stable and repeatable. For the 0.1 device (flat flange) the standard deviation within runs (based on 4 individual determinations per run) was 0.02 percent of the reflection coefficient magnitude, and the standard deviation between daily averages was 0.015 percent giving a quadrature sum of 0.025 percent.

The 0.024 device exhibited some instability, and a plot of the results displays a "learning curve" (the standard deviation values decreased by an order of magnitude from start to finish) so that a components of variance analysis is not possible at present. Since the standard deviation of the daily averages for the 0.1 device is small (which implies that the measurement system is stable), the conclusion is that the UG-385/U flange is the contributing factor to the reflector instability and is indeed inferior in respect to measurement repeatability.

Additional measurements on the 0.024 device which consisted of tightening the flange bolts by proceeding in either a clockwise or counter clockwise direction around the flange by one operator reduced the standard deviation from 0.8 percent to 0.07 percent. However, when operators were changed, different values of reflection coefficient were obtained.

At present, measurements using this type of flange are unstable, and until further research on flange repeatability and the development of procedures to torque the flange bolts, no definite limits of the repeatability of reflection coefficient measurements using the UG-385/U flange can be reached.

5.2 Attenuation

The measurement of attenuation difference with a rotary-vane attenuator involves angular rotation of the center vane by a dial mechanism being set on several prescribed marks. The repeatability of such a measurement of attenuation involves these factors: (1) ability of the rotor vane to repeat the same angular displacement for a given dial setting, (2) the ability of the operator to set and read the same mark, and 3) system stability. Thus, the lack of repeatability introduces a random error in the process of several measurements. (A precise high resolution WR15 rotary-vane attenuator with a repeatability of .011 dB at a dial setting of 50 dB has been designed and constructed at the NBS.)

The procedure for an insertion loss measurement requires that the waveguide assembly be opened to accept the device-under-test. In both the closed and receptive position, the waveguide holes must be maintained in exact axial alignment to make precision measurements. The connect-disconnect and bolting of the flanges should be done with great care, especially in WR15 and smaller waveguide sizes. Laboratory benches are commercially available for holding waveguide assemblies in a stable and rigid position. The present NBS developed millimeter measurement system (fig. 21) for attenuation and impedance uses a commercial laboratory bench with moderate modifications. The attenuation calibration system is arranged in such a manner that fixed pads, inline multi-hole attenuators, directional couplers, and variable attenuators all can be inserted into the system with minimum effort.

At this time the estimate of the attenuation measurement system random error limits have not been completed, but some typical measurement results are presented in the following paragraphs.

Several commercially available waveguide devices were measured as fixed interlaboratory standards for insertion loss in WR15 waveguide measurement system at 62 and 64 GHz. One device, a directional coupler terminated with a matched load at one output port, was used as an inline fixed attenuator with a nominal value of 1 dB. The directional

coupler was measured in the condition that it was received in the laboratory, that is, with a slight bend in the flange of one port. The estimated value of 3S (three times the calculated standard deviation of the mean) for six determinations taken in this circumstance was 0.129 dB. After the flange of the damaged port was realigned by machining, the calculated values of 3S for five determinations was 0.009 dB. Thus, the above measurements of insertion loss illustrate that excellent alignment of the output flanges is a must for precision measurements in millimeter waveguide.

Two fixed attenuators in WR15 waveguide measured at 62 and 64 GHz were of nominal values of 10 and 20 dB. The calculated values of 3S for five determinations of the 10 dB attenuator at 62 GHz and of a 20 dB attenuator at 64 GHz was 0.023 dB and 0.012 dB, respectively. The measurement precision was better with the 20 dB attenuator due to better flange alignment.

The insertion loss or attenuation of a twenty-eight inch section of commercial silver WR15 waveguide was measured at 64 GHz. The value of 3S for five determinations was 0.012 dB. The nominal value of attenuation of the twenty-eight inch section was 1.5 dB, or about 0.05 dB/inch.

The authors extend their appreciation to R.W. Beatty for his helpful suggestions regarding this paper and to G.C. Counas and R.D. Hunter for their help in the system instrumentation and measurements.

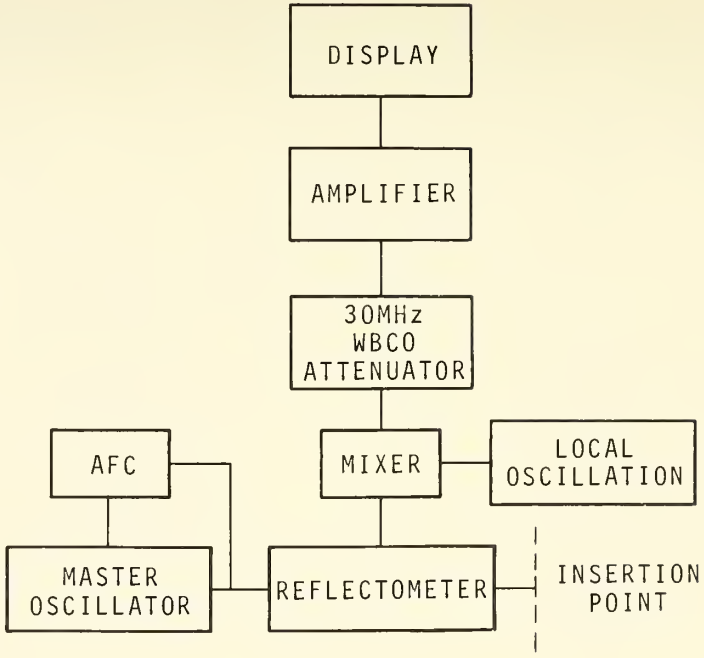

Figure 1. Block diagram of the reflection coefficient magnitude subsystem using an i-f receiver.

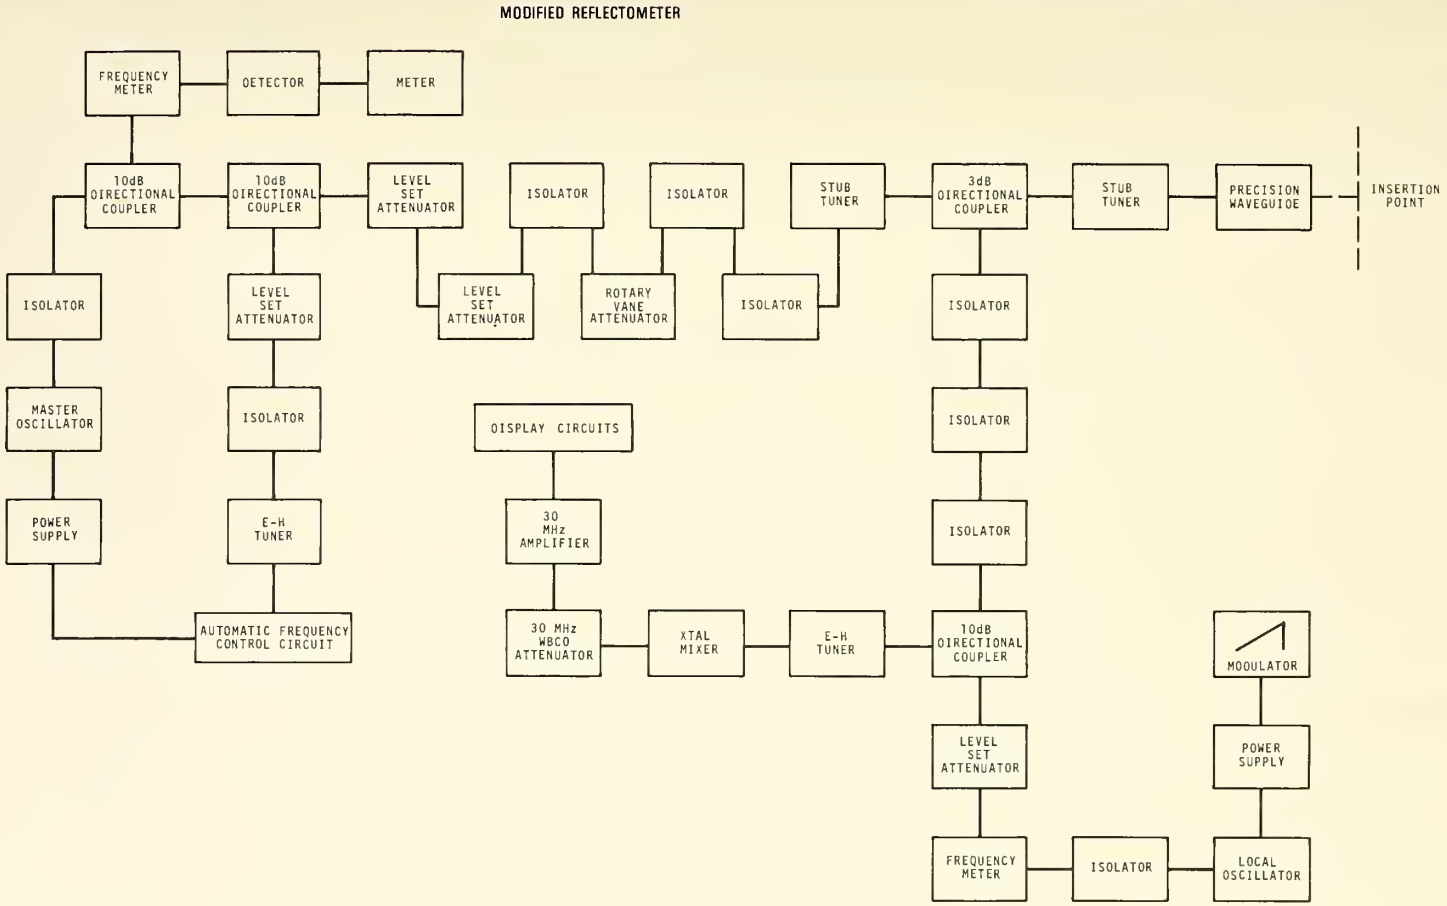

Figure 2. Detailed diagram of the reflection coefficient magnitude subsystem.

TWO LOOP AFC CIRCUIT

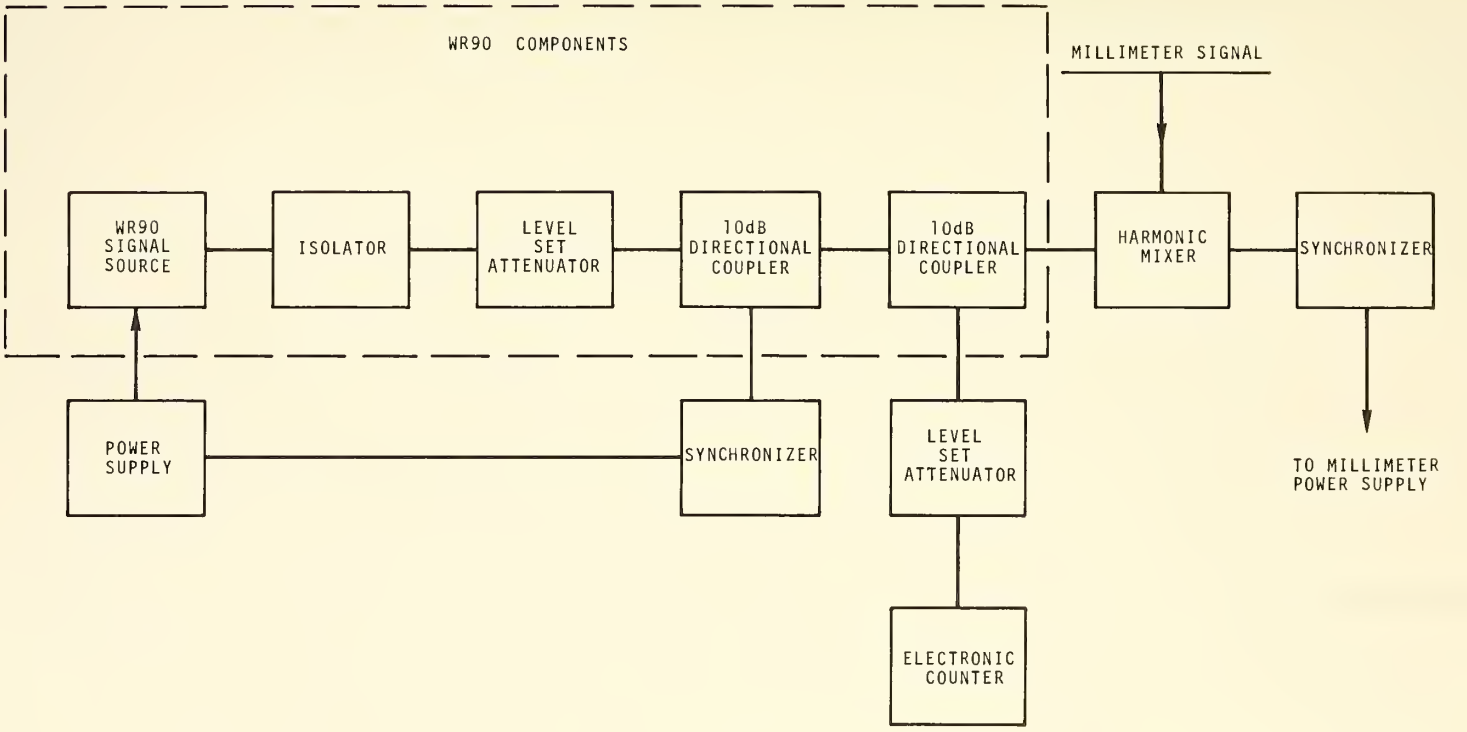

Figure 3. Detailed diagram of the two-loop automatic frequency control network.

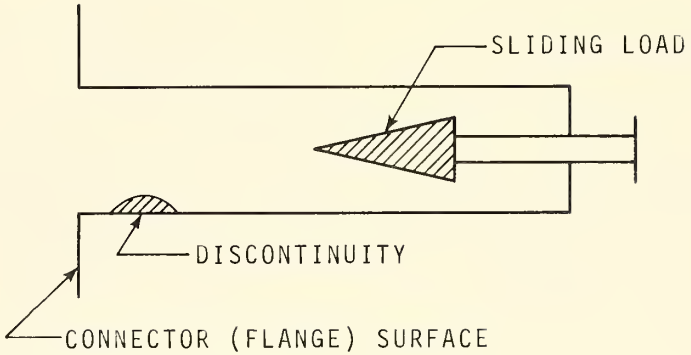

Figure 4. Waveguide termination.

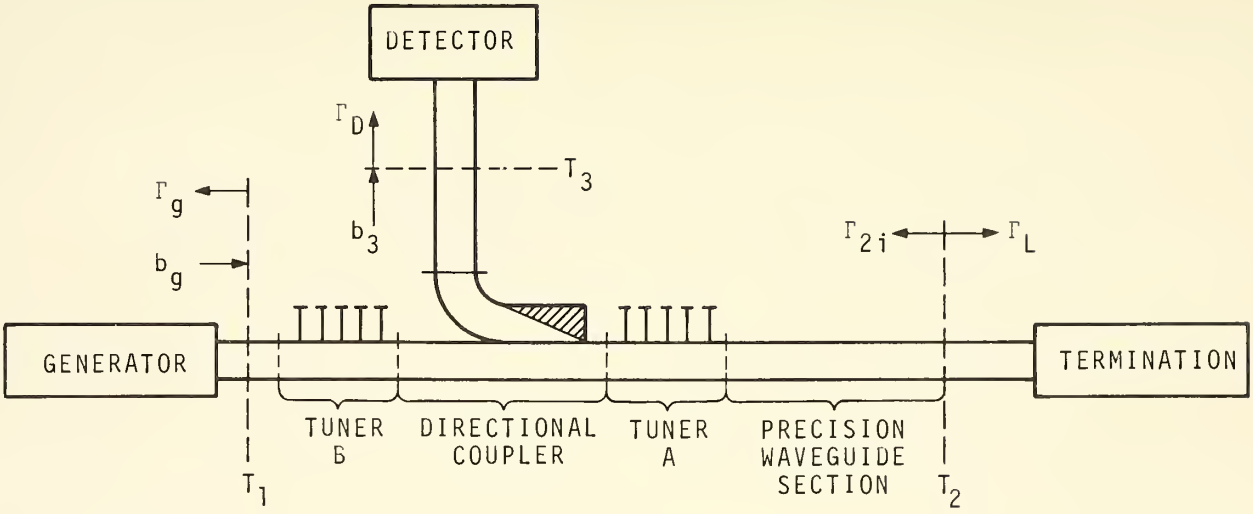

Figure 5. Diagram of a tunable, single-directional coupler reflectometer (modified reflectometer).

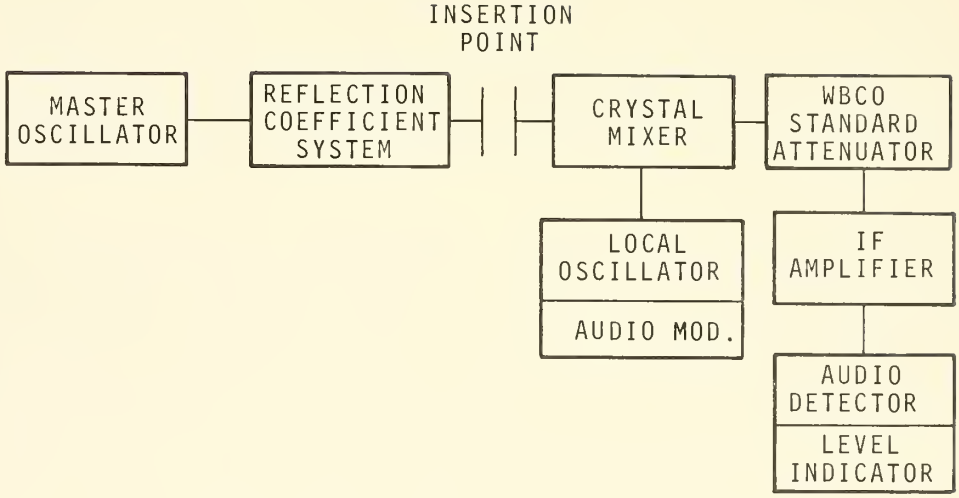

Figure 6. Block diagram of the i-f series substitution attenuation subsystem.

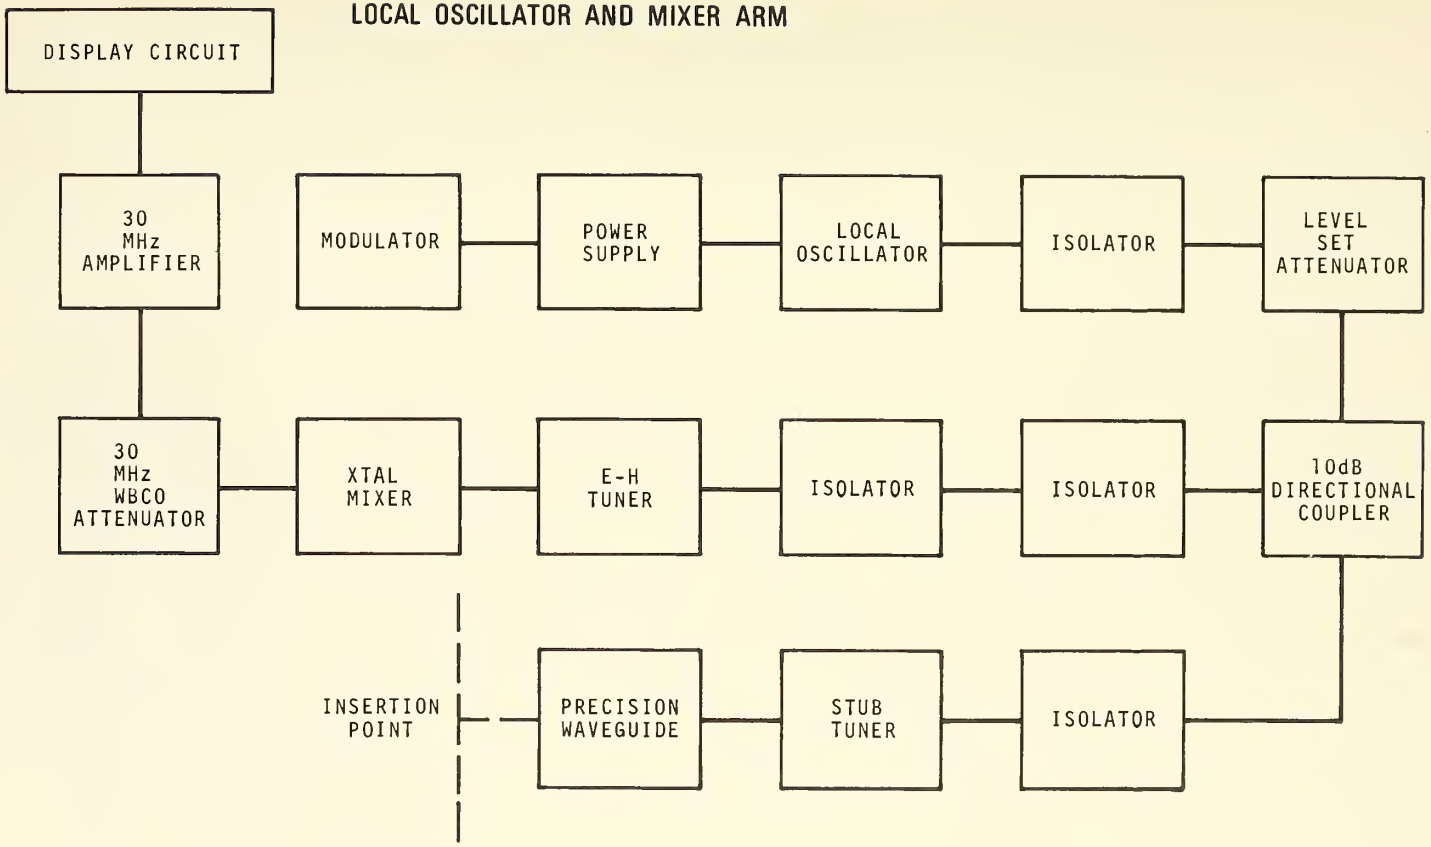

Figure 7. Detailed diagram of the rf receiver of the attenuation subsystem.

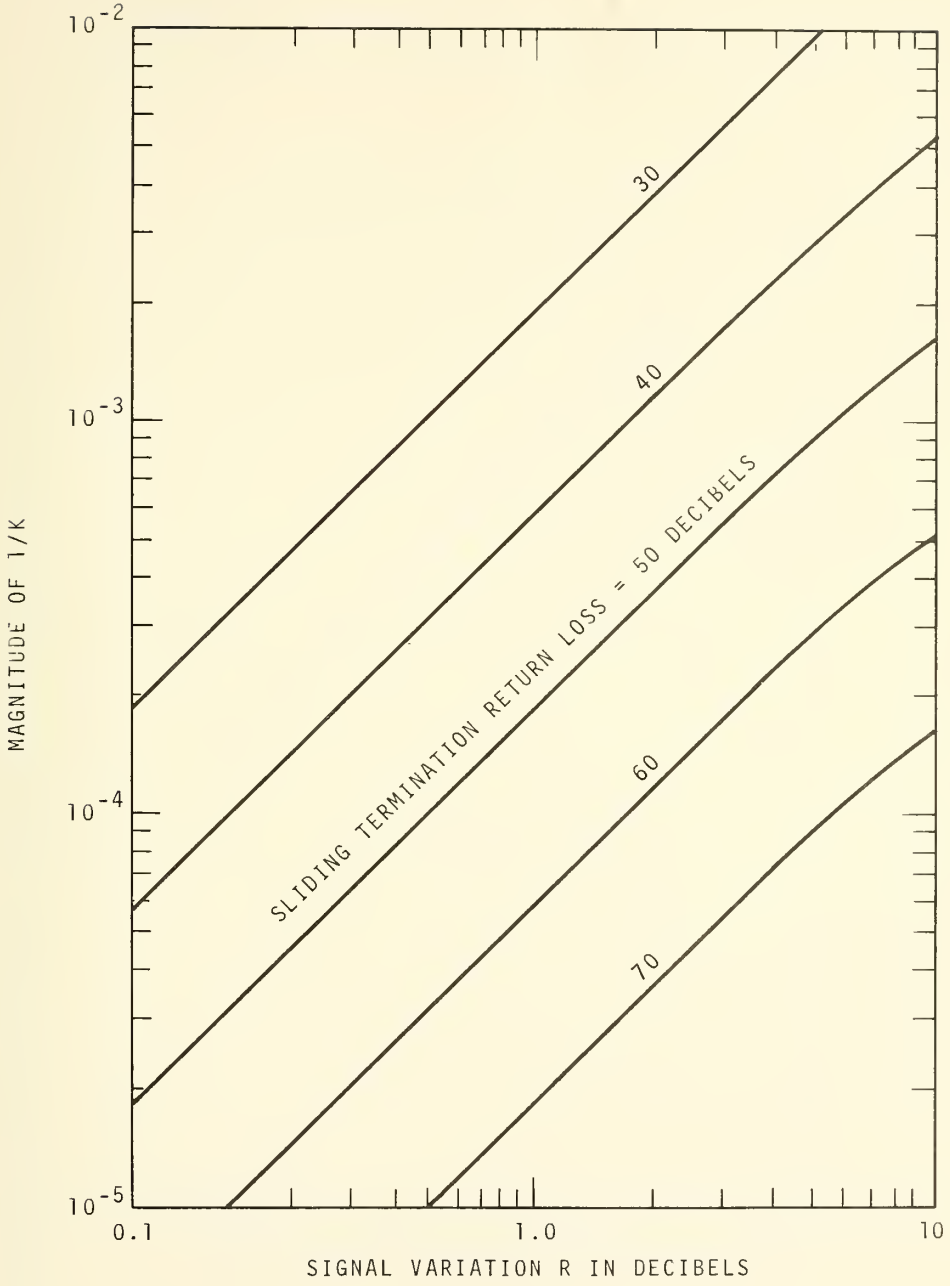

Figure 8. Graph for estimating the magnitude of 1/K given a response variation R when sliding a load with return losses of 30 to 70 decibels.

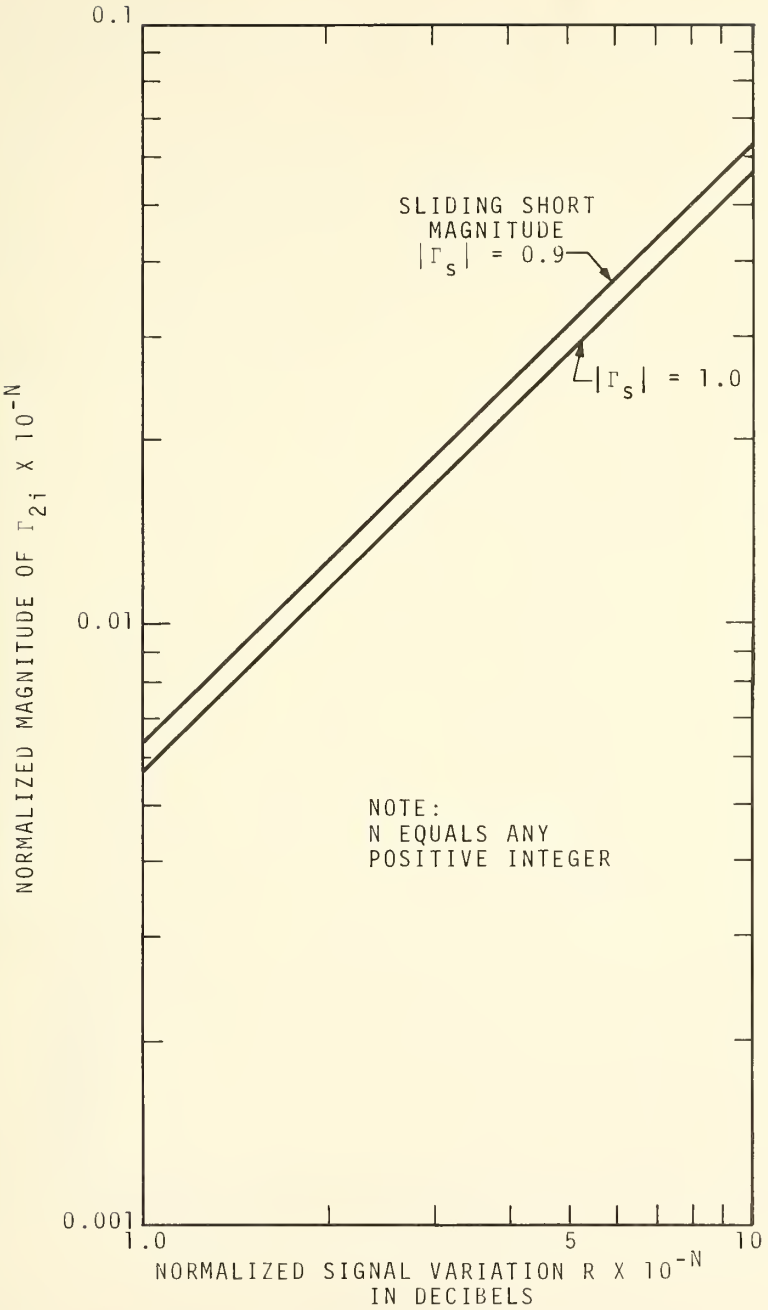

Figure 9. Graph for estimating the equivalent generator impedance for a given response variation $R \times 10^{-N}$ when sliding a short-circuit termination.

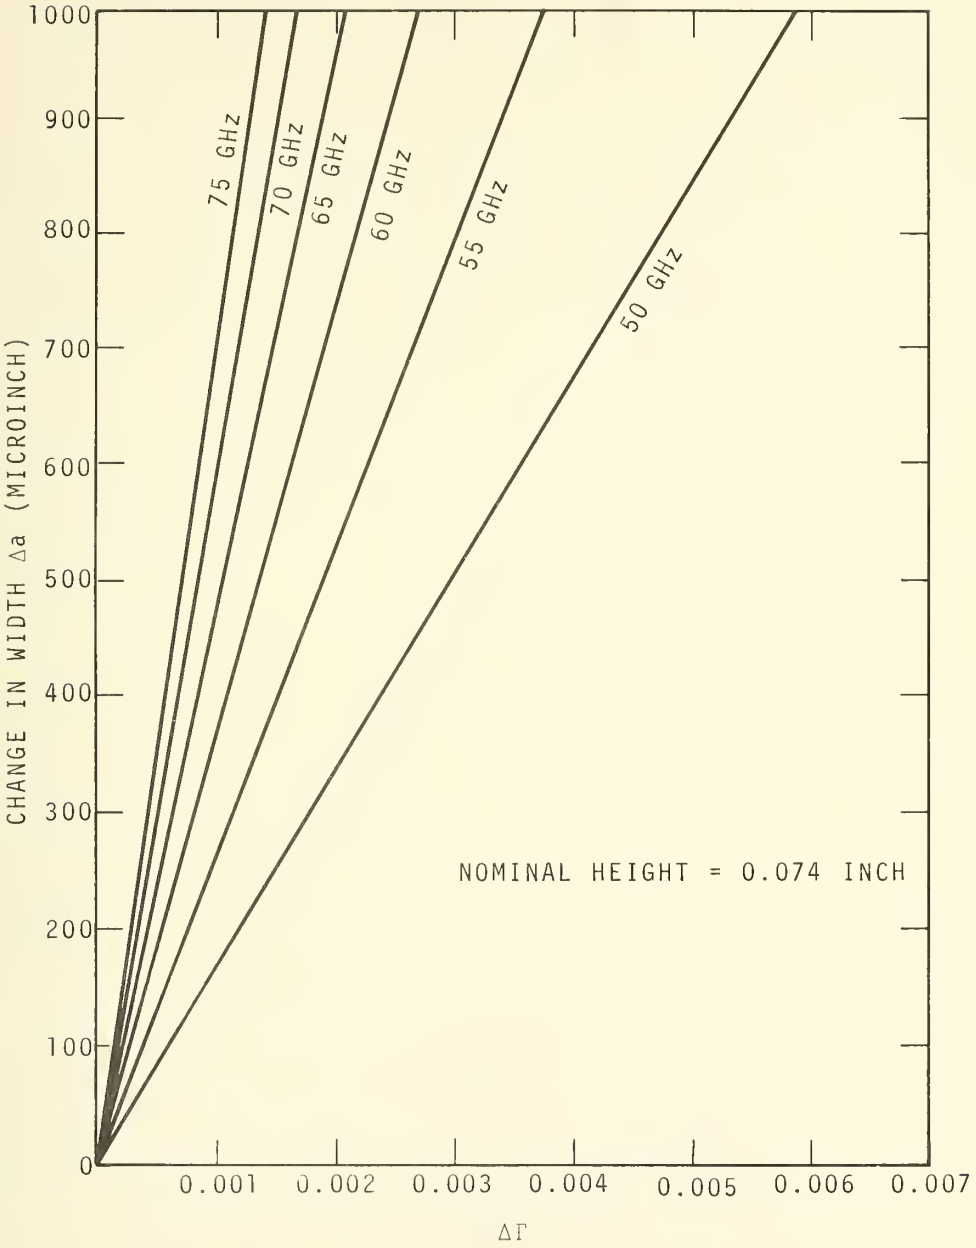

Figure 10. Change in reflection coefficient magnitude versus dimension change in the nominal waveguide width of 0.148 inch.

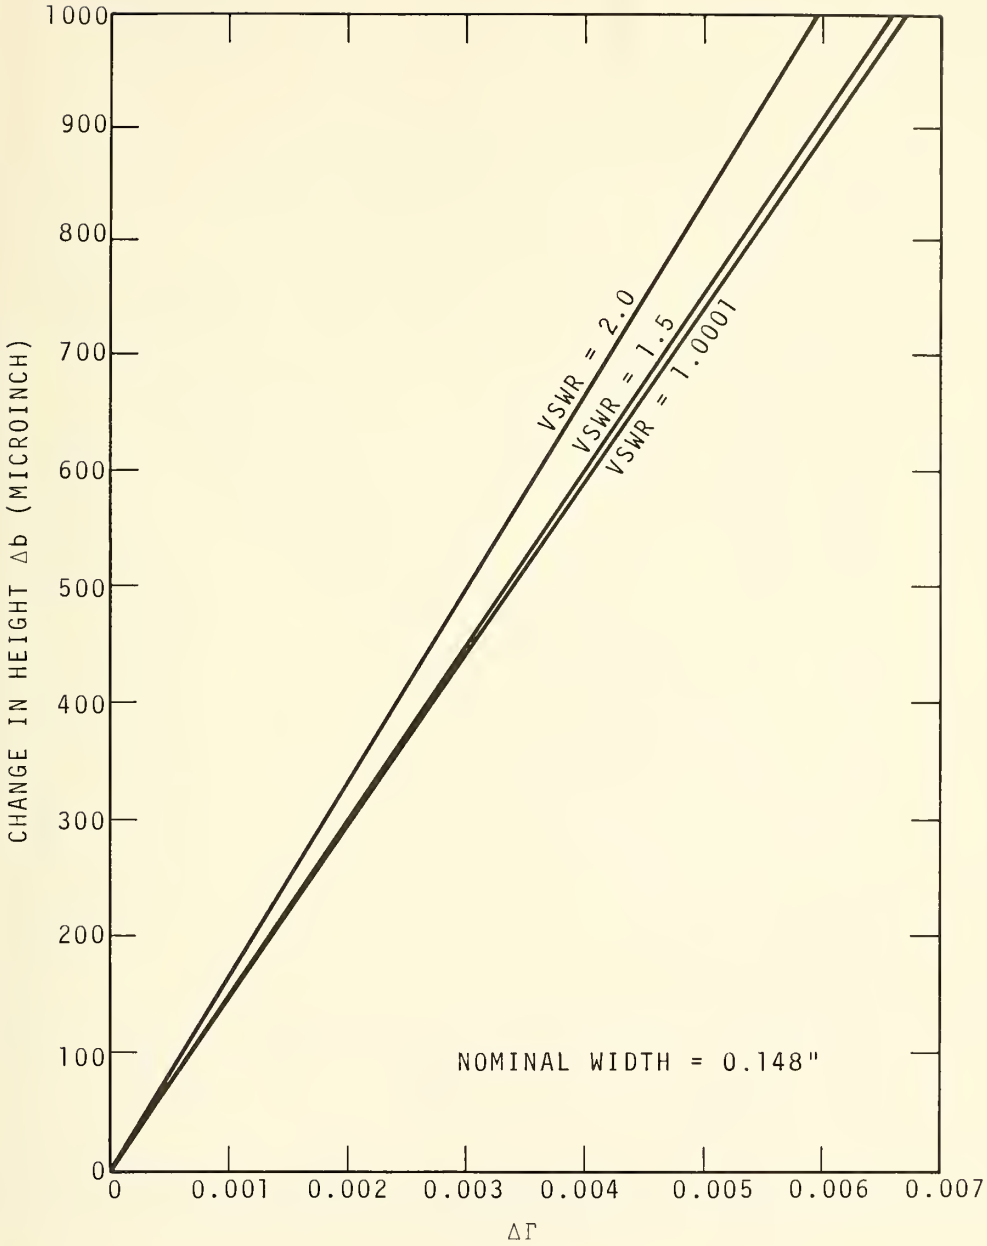

Figure 11. Change in reflection coefficient magnitude versus dimensional change in the nominal waveguide height of 0.074 inch.

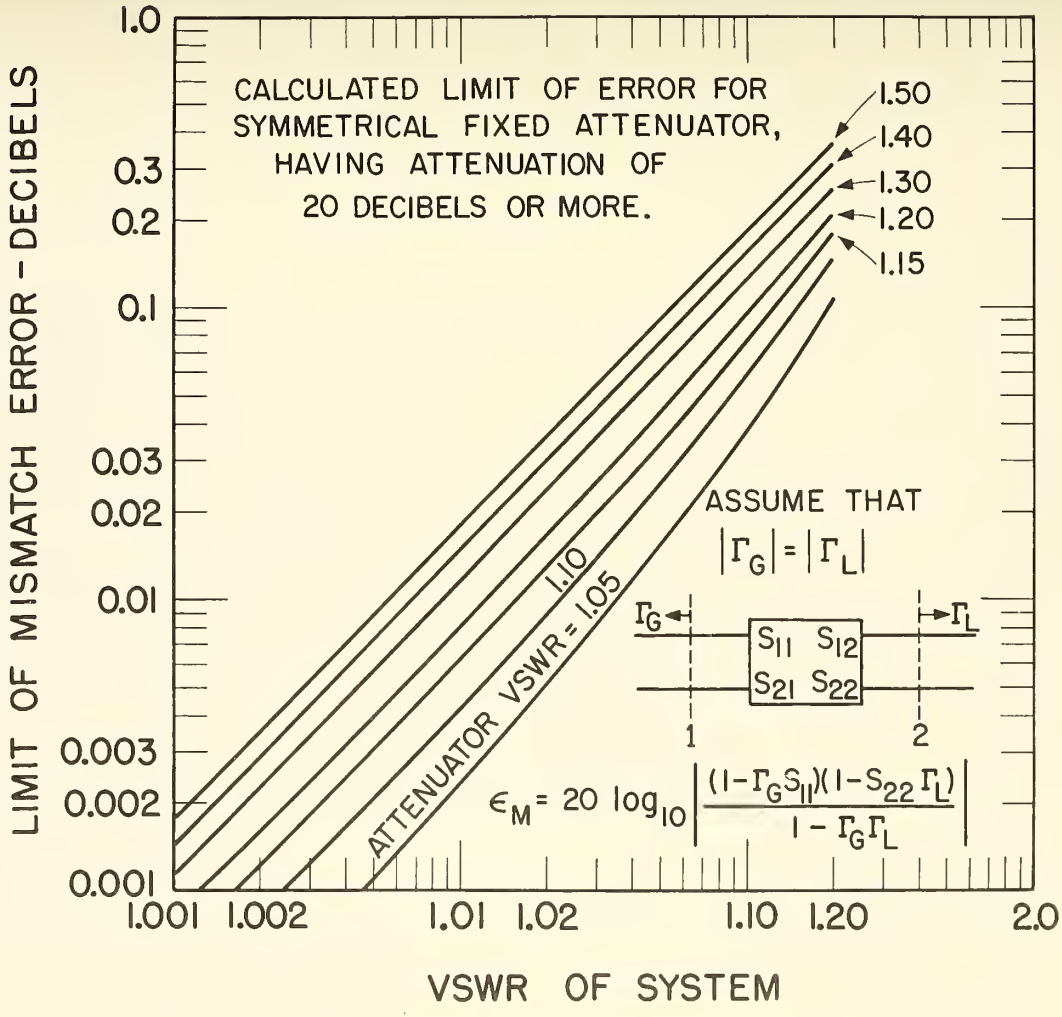

Figure 12. Graph for estimating mismatch error limits when the attenuation and system VSWR is given.

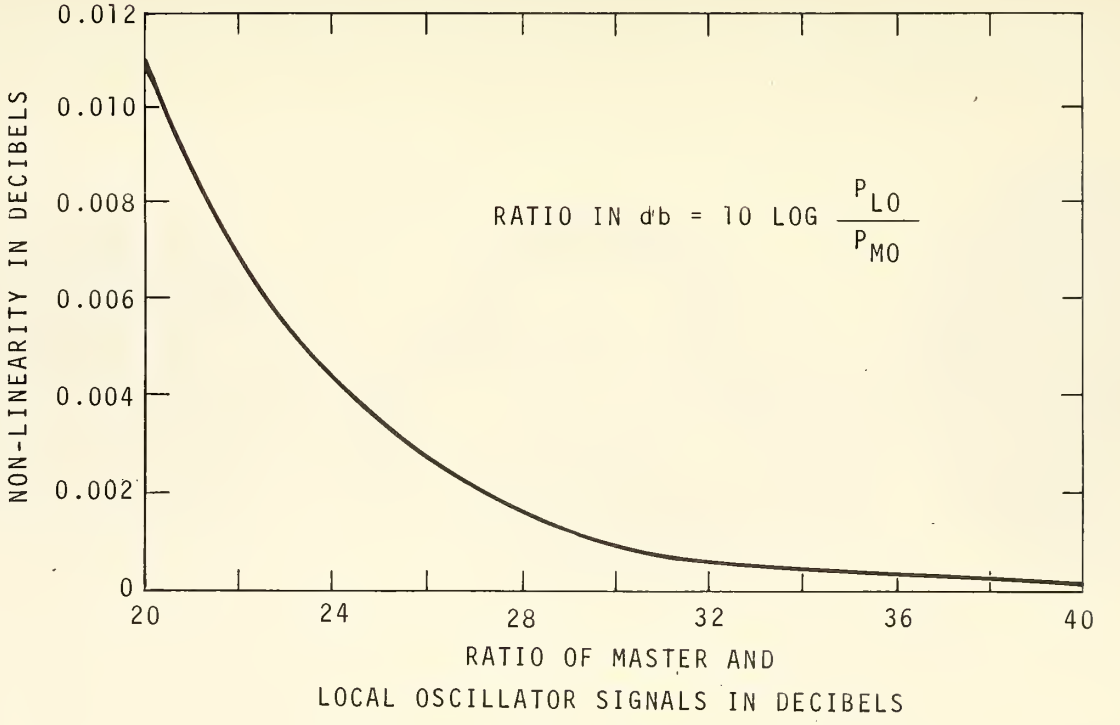

Figure 13. Theoretical mixer power conversion non-linearity versus master-local oscillator power ratio.

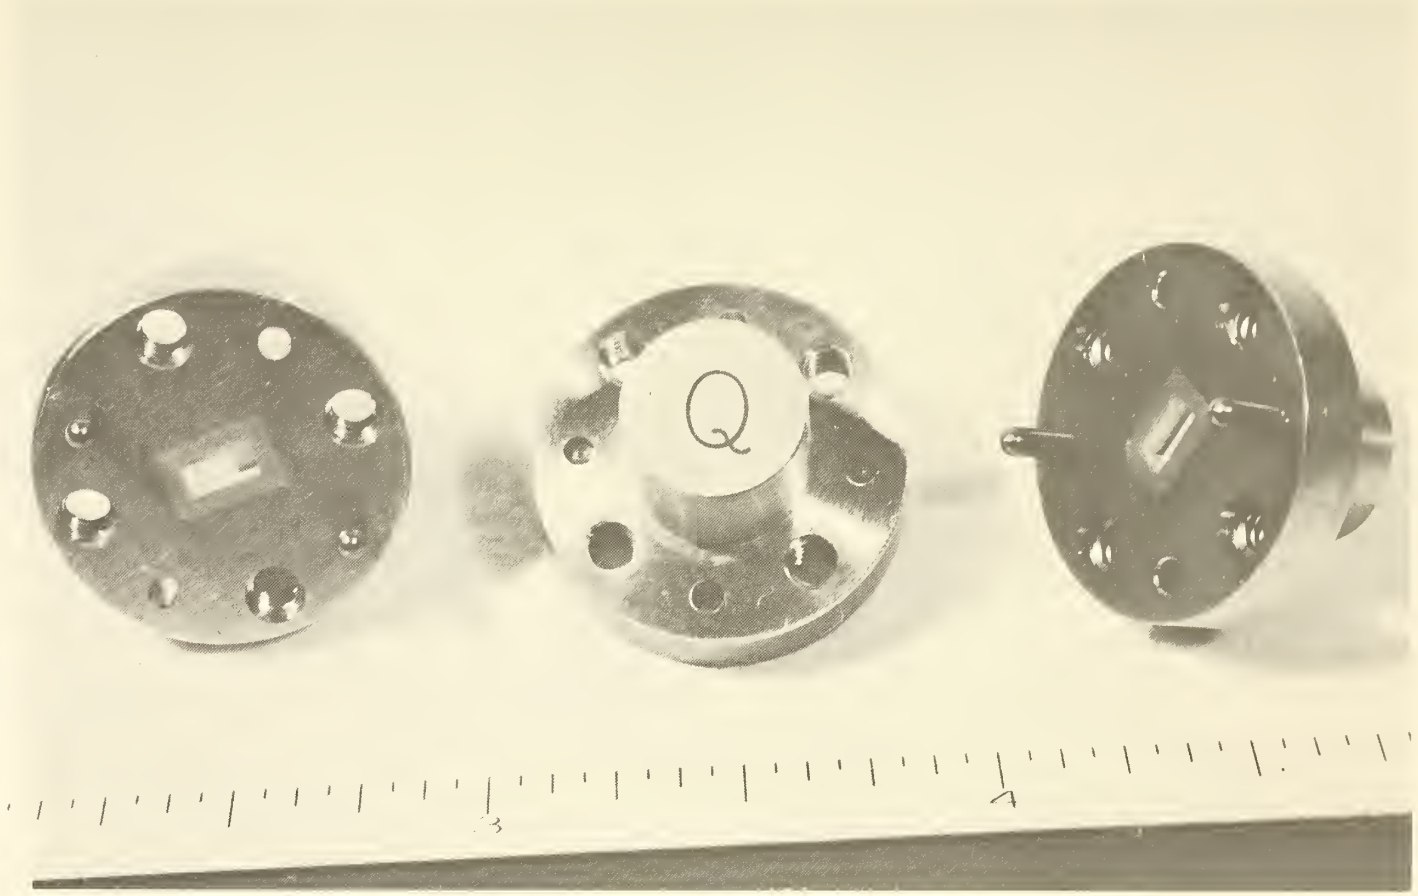

Figure 14. Quarter-wavelength short-circuited waveguide standards.

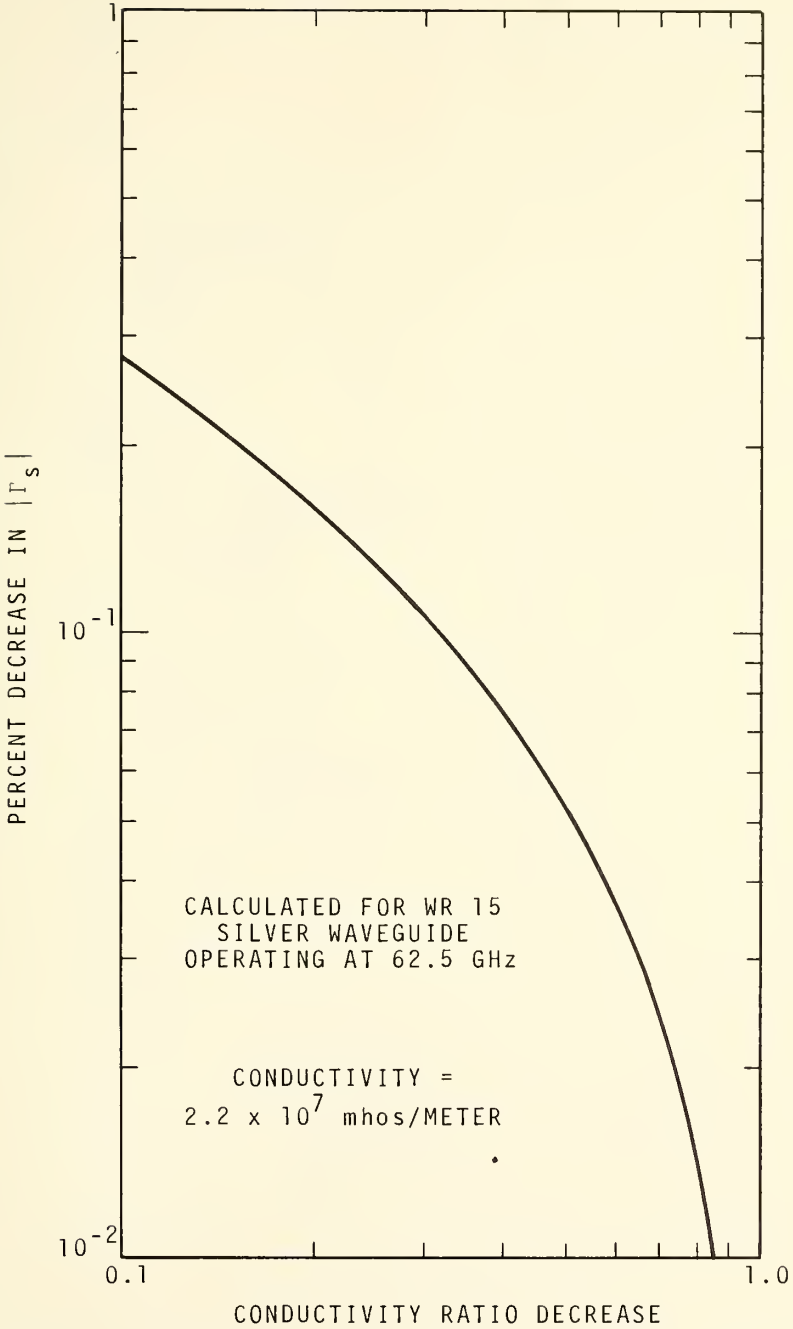

Figure 15. Graph for estimating the change in reflection coefficient of a quarterwave short circuit versus conductivity confidence interval (the relative error substracted from unity).

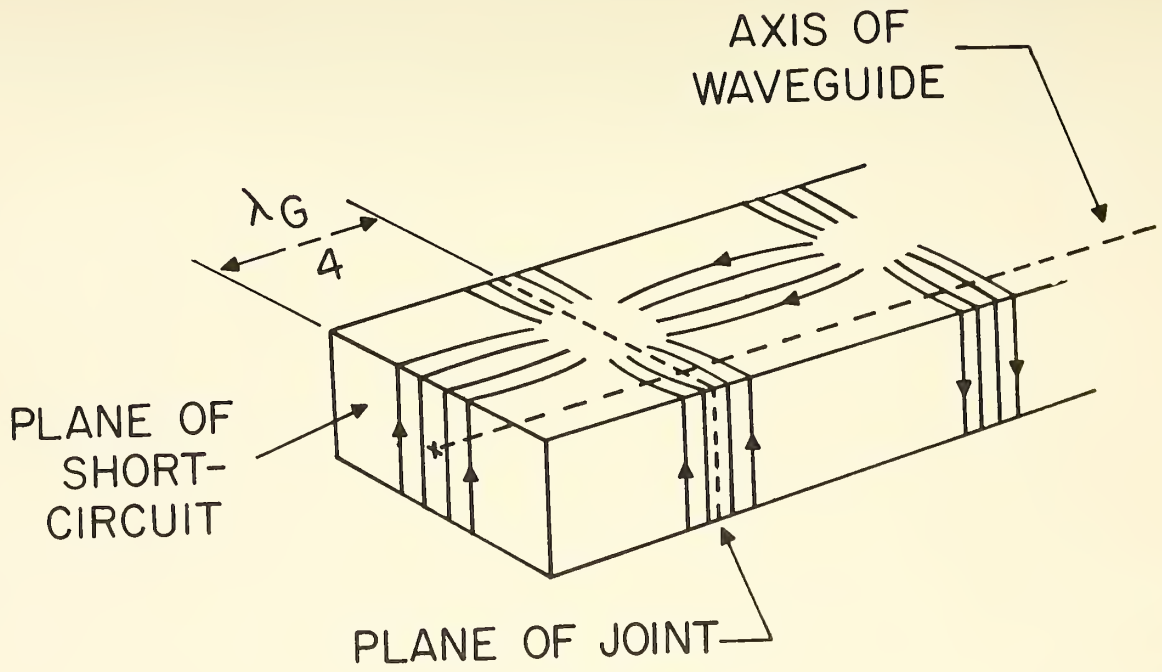

Figure 16. Current distribution for a rectangular TE_{10} mode short-circuited waveguide.

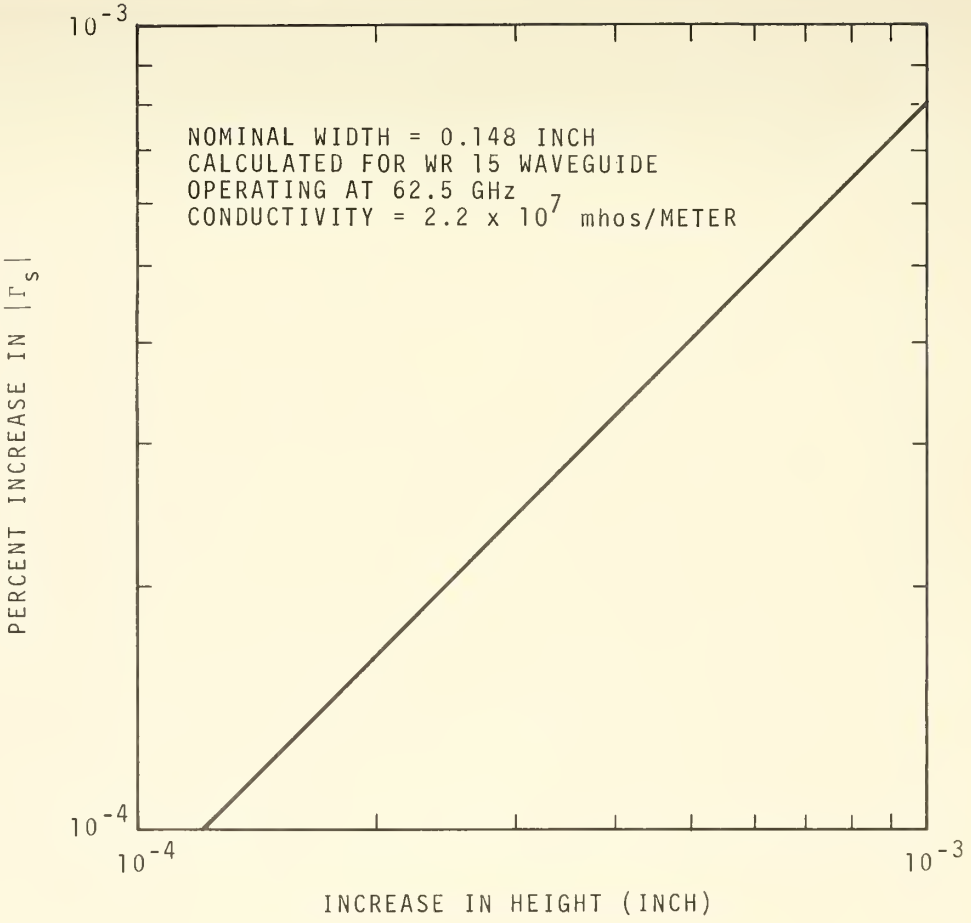

Figure 17. Graph for estimating the change in reflection coefficient magnitude of a quarterwave short circuit versus dimensional deviation from height dimension of 0.074 inch.

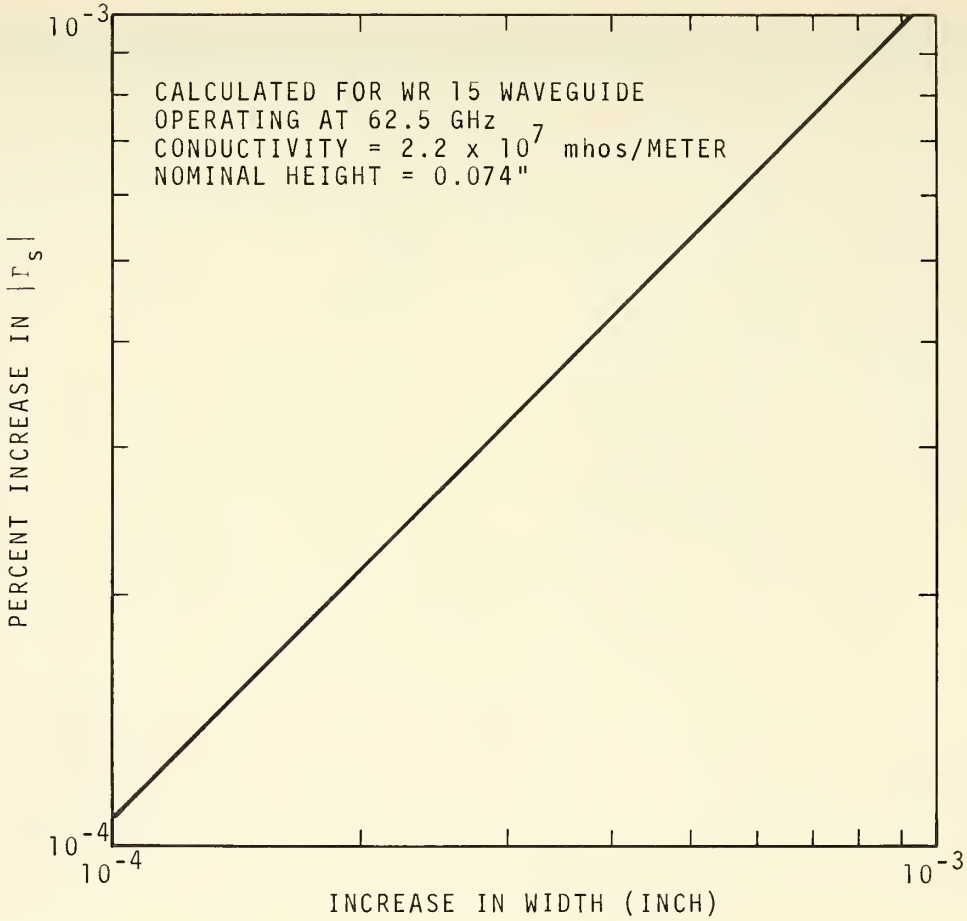

Figure 18. Graph for estimating the change in reflection coefficient magnitude of a quarterwave short circuit versus dimensional deviation from nominal width dimension of 0.148 inch.

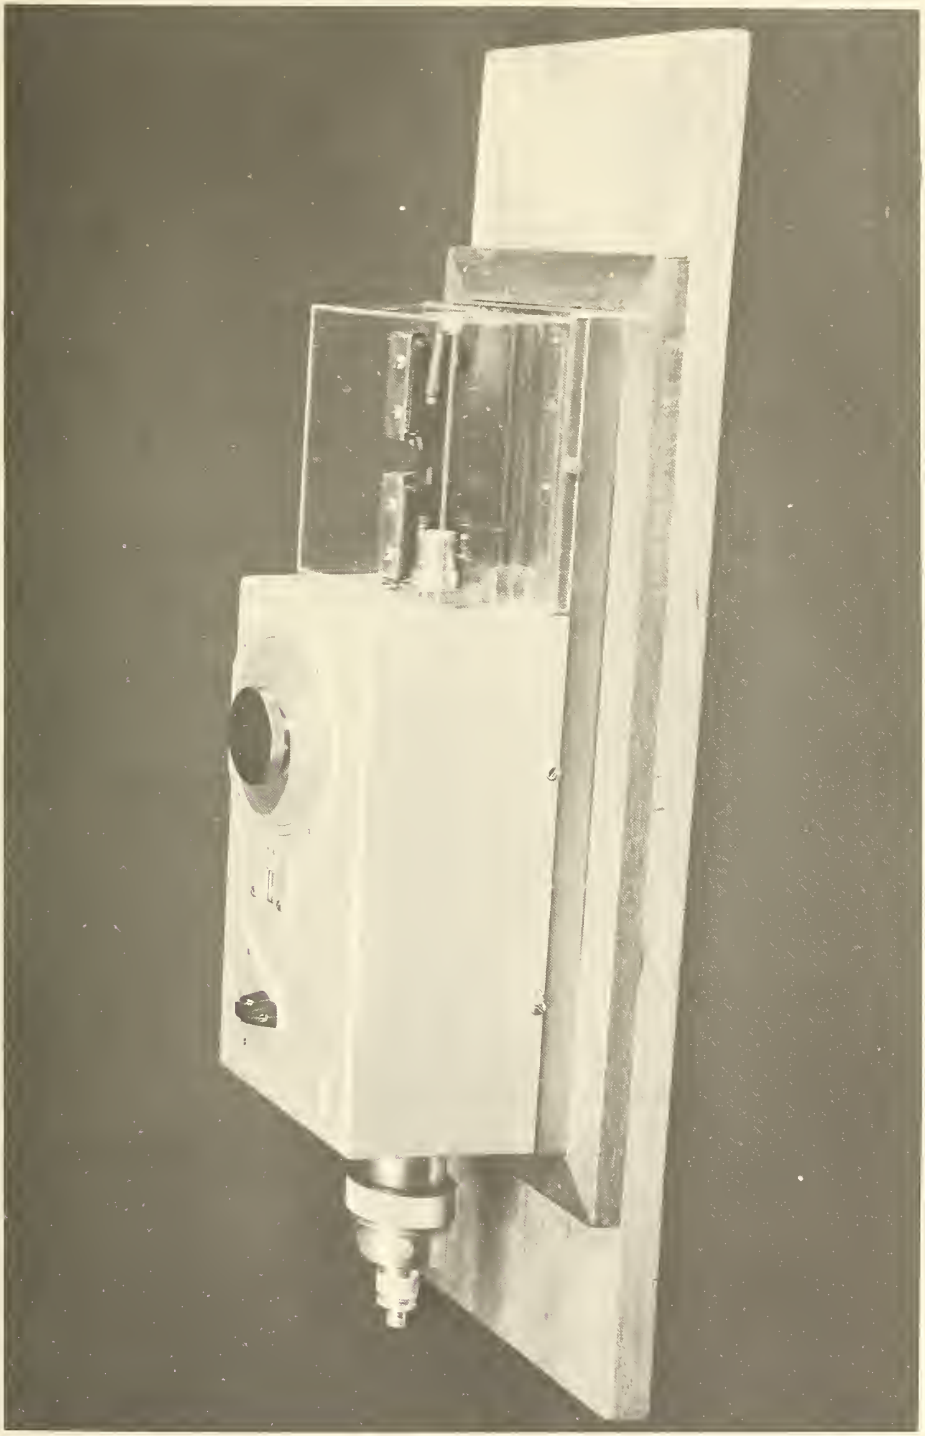

Figure 19. Waveguide-Below-Cutoff attenuator.

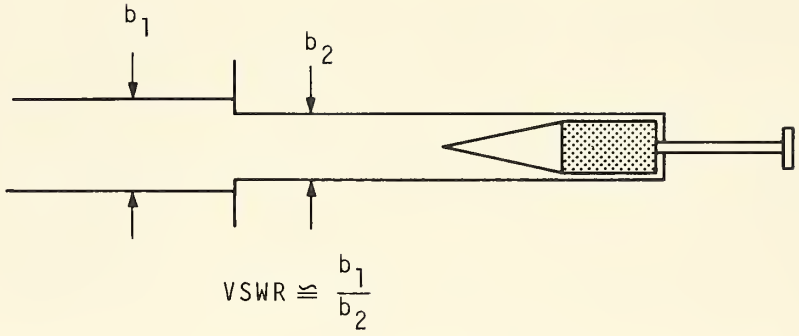

Figure 20. Typical change in narrow dimension of rectangular waveguide used for interlaboratory reflection standards.

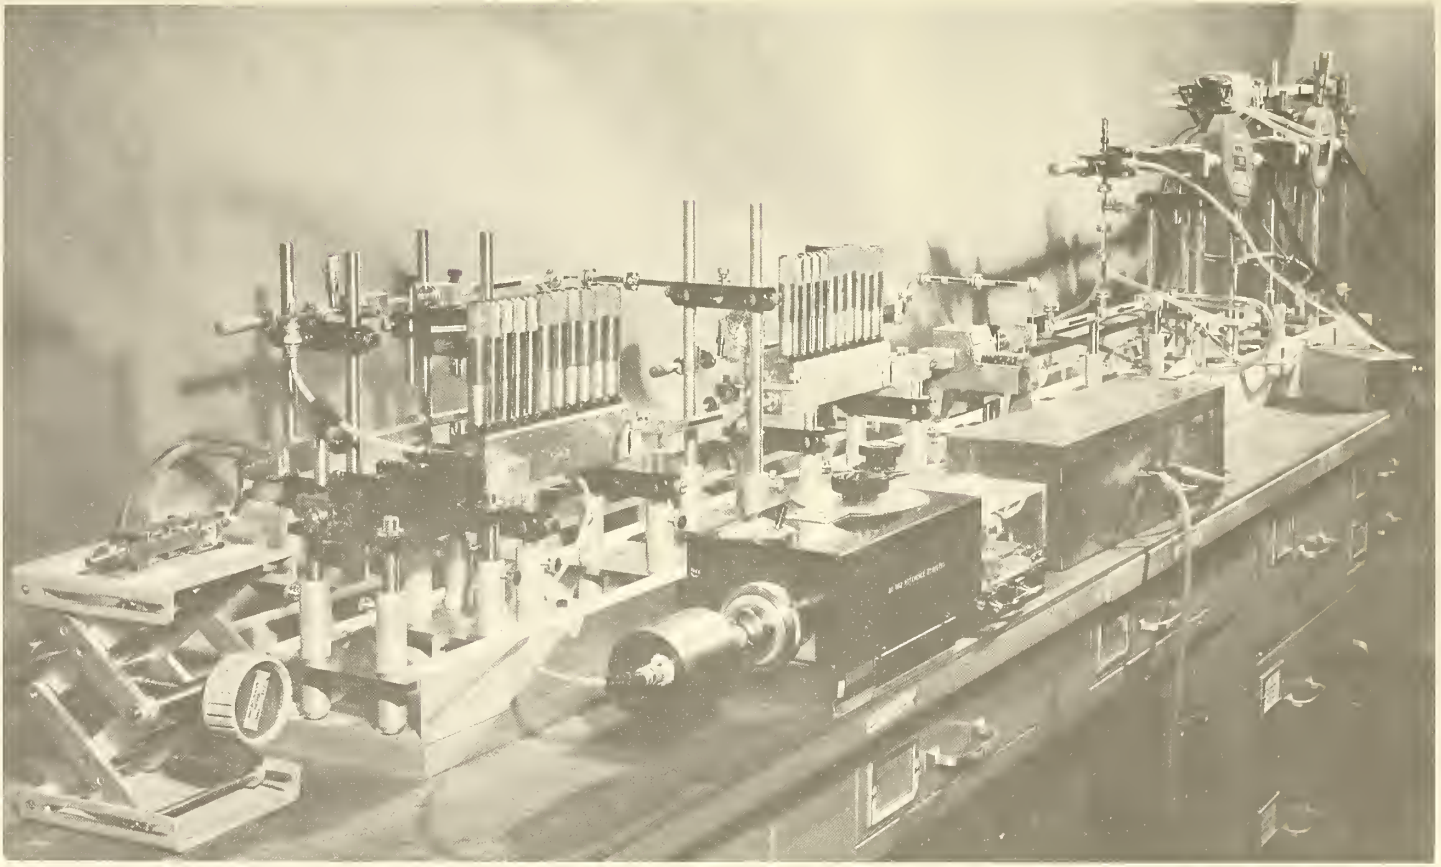

Figure 21. WR15 reflectometer and associated support hardware.

APPENDIX A

To illustrate the statement in section 2.1.2 that the average reflection coefficient magnitude $|\Gamma|_{ave}$ is associated with that element which has the largest reflection, consider the following lossless case (for definitions of losslessness see [29], p. 48) of a termination with a fixed discontinuity Γ_D and a sliding load Γ_L.

It can be shown [30, 31] that

$$|\Gamma|_{max} = \frac{|\Gamma_D| + |\Gamma_L|}{1 + |\Gamma_D\Gamma_L|}$$

and

$$|\Gamma|_{min} = \frac{|\Gamma_D| - |\Gamma_L|}{1 - |\Gamma_D\Gamma_L|} \qquad |\Gamma_D| > |\Gamma_L|$$

or

$$|\Gamma|_{min} = \frac{|\Gamma_L| - |\Gamma_D|}{1 - |\Gamma_D\Gamma_L|} \qquad |\Gamma_L| > |\Gamma_D|$$

where $|\Gamma|_{max}$ and $|\Gamma|_{min}$ correspond to the measured maximum and minimum reflection coefficients. Then, the average reflection coefficient magnitude

$$|\Gamma|_{ave} = \frac{1}{2}\left(|\Gamma|_{max} + |\Gamma|_{min}\right)$$

$$= |\Gamma_D| \frac{(1 - |\Gamma_L|^2)}{1 - |\Gamma_D\Gamma_L|^2}, \qquad |\Gamma_D| > |\Gamma_L|$$

or

$$= |\Gamma_L| \frac{(1 - |\Gamma_D|^2)}{1 - |\Gamma_D \Gamma_L|^2}, \qquad |\Gamma_L| > |\Gamma_D|$$

is in either case a first order approximation to the largest reflection coefficient.

APPENDIX B

Estimated Systematic Error Limits for WR15 Attenuation Measurements

The following estimated error limits are based on tolerances for the NBS WR15 components and systems.

Converter (Mixer) Error	±0.003
Noise up to {40 dB, 50 dB} measured attenuation	±0.004 ±0.020 dB

30 MHz Standard Attenuator

Loading effects	±0.001 dB
Mode purity	±0.001 dB
Dimensional Tolerance	±0.002 dB/20 dB

Mismatch Error vs. Attenuator VSWR

(System VSWR at insertion point = 1.02)

Attenuator VSWR	Mismatch Error (dB)
1.05	±0.005
1.10	±0.008
1.15	±0.013
1.20	±0.017

Total Systematic Error (dB)
Attenuator VSWR

Dial Setting (dB)	1.05	1.10	1.15	1.20
10	±0.012	±0.015	±0.020	±0.024
20	±0.012	±0.015	±0.020	±0.024
30	±0.014	±0.017	±0.022	±0.026
40	±0.018	±0.021	±0.026	±0.030
50	±0.036	±0.039	±0.044	±0.048

APPENDIX C

Estimated Systematic Error Limits ($\Delta\Gamma$) for WR15 Reflection Coefficient Magnitude ($|\Gamma|$) Measurements

The following estimated error limits are based on tolerances for the NBS WR15 components and systems.

$|\Gamma| \geq 0.025$

Tuning Error	
Directivity	$\pm 0.00015\ (1 + |\Gamma|)$
Γ_{2i}	$\pm 0.00012\ (1 + |\Gamma|)$
Converter Error	$\pm 0.00035\ |\Gamma|$
30 MHz Standard Attenuator	$\pm 0.00046\ |\Gamma|$
Reflection Coefficient Magnitude Standard	$\pm 0.0003\ |\Gamma|$
Precision Section	± 0.0006
Total Error	$\pm 0.00087 + 0.00138\ |\Gamma|$
Reported Estimated Error	$\Delta\Gamma = \pm(1 + 1.5|\Gamma|) \times 10^{-3}$

$|\Gamma| < 0.025$

Converter Error	$\pm 0.00105\ |\Gamma|$
30 MHz Standard Attenuator	$\pm 0.00138\ |\Gamma|$
Total Error	$\pm 0.00087 + 0.0030\ |\Gamma|$
Reported Estimated Error	$\Delta\Gamma = \pm(1 + 3|\Gamma|) \times 10^{-3}$

APPENDIX D

Machine drawings for 11 stub tuner

for 55-65 GHz, WR15.

Figures 22(a), 22(b), 22(c).

Certain commercial equipment and materials are identified in this paper in order to adequately specify the experimental procedure. In no case does such identification imply recommendation or endorsement by the National Bureau of Standards, nor does it imply that the material or equipment identified is necessarily the best available for the purpose.

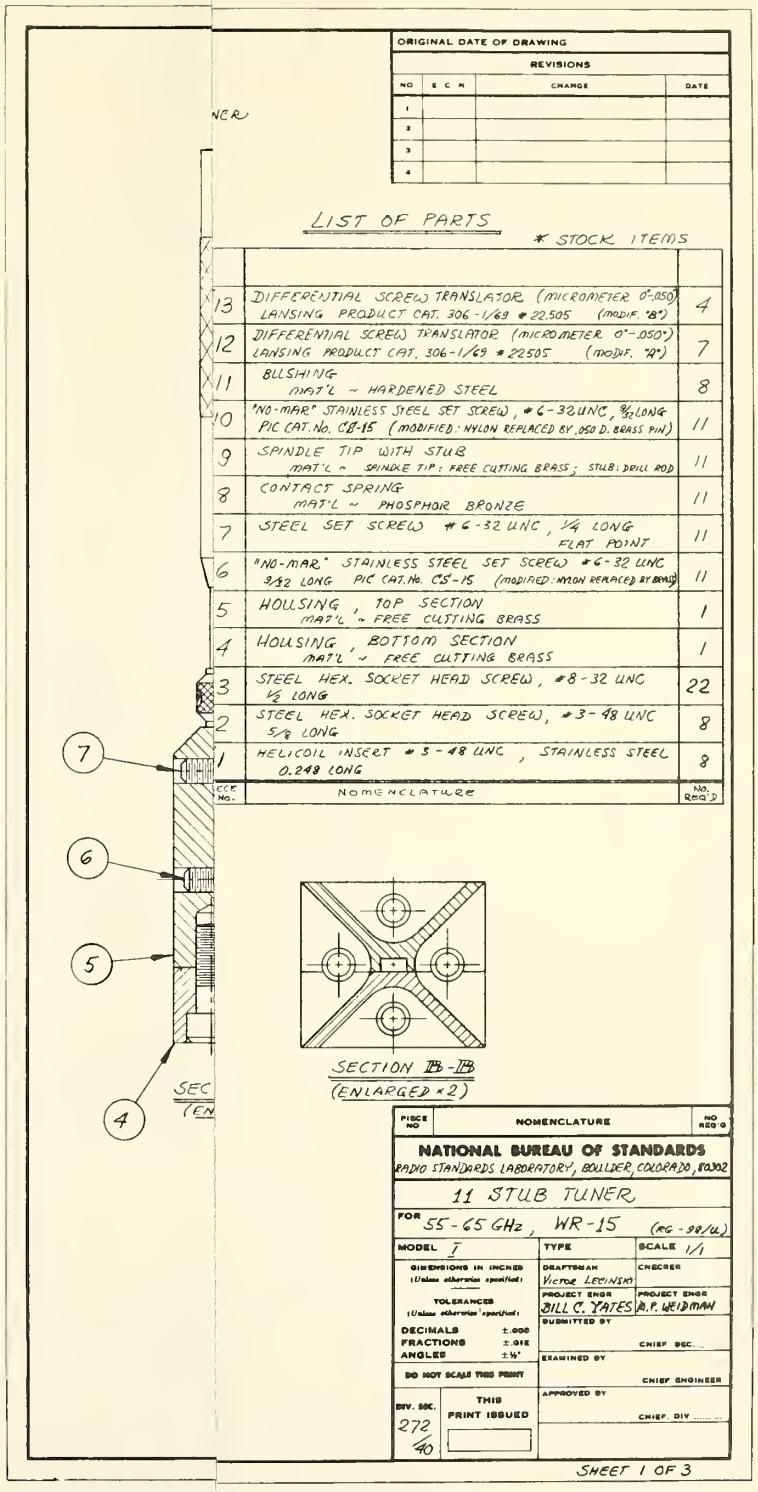

ORIGINAL DATE OF DRAWING

REVISIONS

NO	E C N	CHANGE	DATE
1			
2			
3			
4			

NER

LIST OF PARTS

* STOCK ITEMS

ECE No.	NOMENCLATURE	No. Req'd
13	DIFFERENTIAL SCREW TRANSLATOR (MICROMETER 0"-.050") LANSING PRODUCT CAT. 306-1/69 # 22.505 (MODIF. "B")	4
12	DIFFERENTIAL SCREW TRANSLATOR (MICROMETER 0"-.050") LANSING PRODUCT CAT. 306-1/69 # 22505 (MODIF. "A")	7
11	BUSHING MAT'L ~ HARDENED STEEL	8
10	"NO-MAR" STAINLESS STEEL SET SCREW, #6-32 UNC, 3/32 LONG PIC CAT. No. CB-15 (MODIFIED: NYLON REPLACED BY .050 D. BRASS PIN)	11
9	SPINDLE TIP WITH STUB MAT'L ~ SPINDLE TIP: FREE CUTTING BRASS; STUB: DRILL ROD	11
8	CONTACT SPRING MAT'L ~ PHOSPHOR BRONZE	11
7	STEEL SET SCREW #6-32 UNC, 1/4 LONG FLAT POINT	11
6	"NO-MAR" STAINLESS STEEL SET SCREW #6-32 UNC 3/32 LONG PIC CAT. No. CS-15 (MODIFIED: NYLON REPLACED BY BRASS)	11
5	HOUSING, TOP SECTION MAT'L ~ FREE CUTTING BRASS	1
4	HOUSING, BOTTOM SECTION MAT'L ~ FREE CUTTING BRASS	1
3	STEEL HEX. SOCKET HEAD SCREW, #8-32 UNC 1/2 LONG	22
2	STEEL HEX. SOCKET HEAD SCREW, #3-48 UNC 5/8 LONG	8
1	HELICOIL INSERT #3-48 UNC, STAINLESS STEEL 0.248 LONG	8

7

6

5

4

SEC
(EN

SECTION BB-BB
(ENLARGED ×2)

PIECE NO	NOMENCLATURE	NO REQ'D

NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302

11 STUB TUNER

FOR 55-65 GHz, WR-15 (RG-98/U)

MODEL I | TYPE | SCALE 1/1

DIMENSIONS IN INCHES (Unless otherwise specified)

TOLERANCES (Unless otherwise specified)

DECIMALS ±.005
FRACTIONS ±.015
ANGLES ±½°

DO NOT SCALE THIS PRINT

DRAFTSMAN Victor Lecinski | CHECKED

PROJECT ENGR BILL C. YATES | PROJECT ENGR A. P. WEIDMAN

SUBMITTED BY ..... CHIEF SEC.

EXAMINED BY ..... CHIEF ENGINEER

APPROVED BY ..... CHIEF, DIV.

DIV. SEC. 272/40 | THIS PRINT ISSUED

SHEET 1 OF 3

Figure 22(a

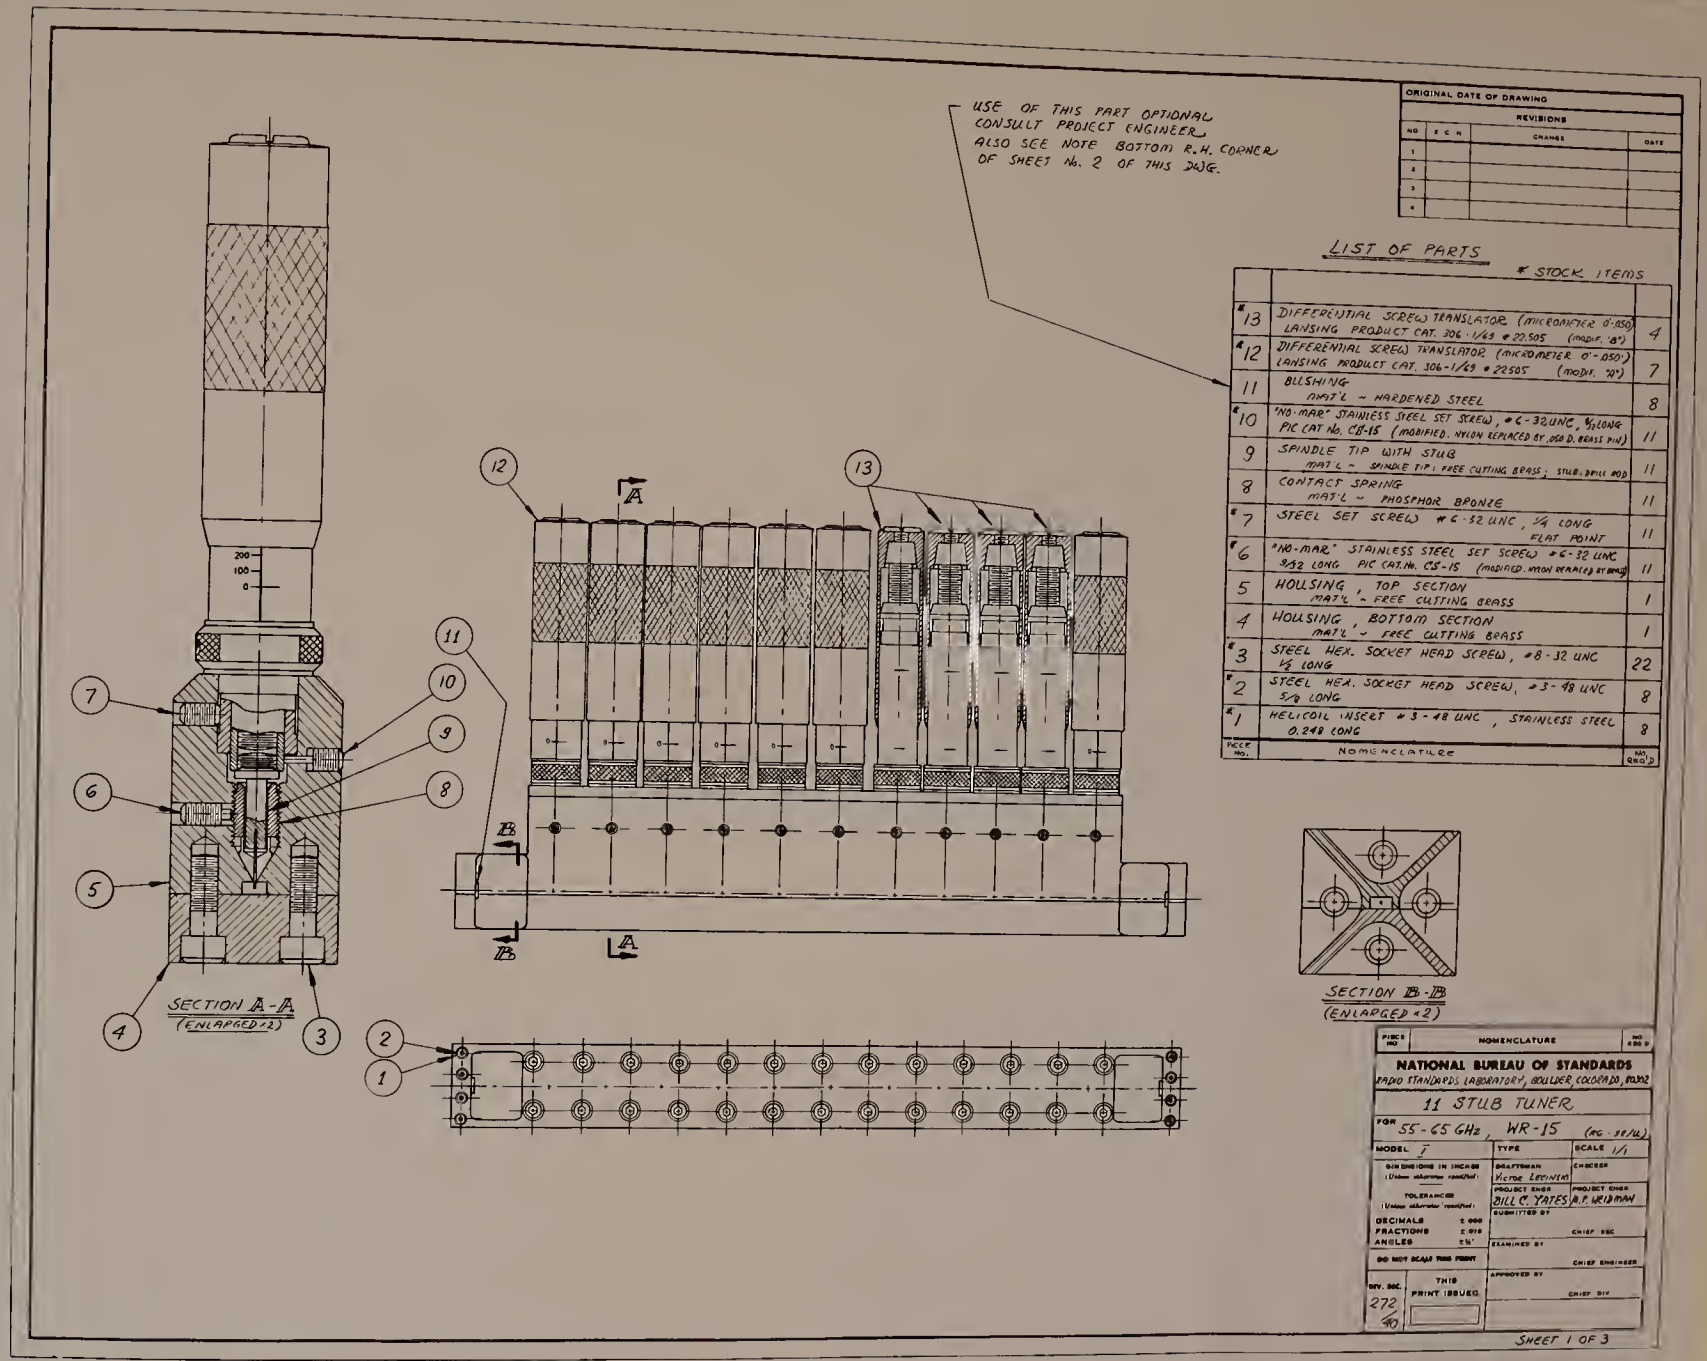
USE OF THIS PART OPTIONAL
CONSULT PROJECT ENGINEER
ALSO SEE NOTE BOTTOM R.H. CORNER
OF SHEET No. 2 OF THIS DWG.
ORIGINAL DATE OF DRAWING
REVISIONS
NO
S C N
CHANGE
DATE
LIST OF PARTS
* STOCK ITEMS
PIECE NO.
NOMENCLATURE
NO REQ'D
*13 DIFFERENTIAL SCREW TRANSLATOR (MICROMETER 0-.050) LANSING PRODUCT CAT. 306-1/49 # 22505 (MODIF. "B") 4
*12 DIFFERENTIAL SCREW TRANSLATOR (MICROMETER 0-.050") LANSING PRODUCT CAT. 306-1/49 # 22505 (MODIF. "A") 7
11 BILSHING MAT'L - HARDENED STEEL 8
*10 "NO-MAR" STAINLESS STEEL SET SCREW, # 6-32 UNC, 3/16 LONG PIC CAT No. CS-15 (MODIFIED. NYLON REPLACED BY .050 D. BRASS PIN) 11
9 SPINDLE TIP WITH STUB MAT'L - SPINDLE TIP: FREE CUTTING BRASS; STUB: DRILL ROD 11
8 CONTACT SPRING MAT'L - PHOSPHOR BRONZE 11
*7 STEEL SET SCREW # 6-32 UNC, 1/4 LONG FLAT POINT 11
*6 "NO-MAR" STAINLESS STEEL SET SCREW # 6-32 UNC 3/32 LONG PIC CAT. No. CS-15 (MODIFIED. NYLON REMOVED BY [illegible]) 11
5 HOUSING, TOP SECTION MAT'L - FREE CUTTING BRASS 1
4 HOUSING, BOTTOM SECTION MAT'L - FREE CUTTING BRASS 1
*3 STEEL HEX. SOCKET HEAD SCREW, #8-32 UNC 1/8 LONG 22
*2 STEEL HEX. SOCKET HEAD SCREW, #3-48 UNC 5/8 LONG 8
*1 HELICOIL INSERT # 3-48 UNC, STAINLESS STEEL 0.248 LONG 8
200
100
0
SECTION A-A
(ENLARGED 2:1)
SECTION B-B
(ENLARGED 2:1)
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
11 STUB TUNER
FOR 55-65 GHz, WR-15 (RG-99/U)
MODEL 7
TYPE
SCALE 1/1
DRAFTSMAN Victor Levinson
CHECKED
PROJECT ENGR Bill C. Yates
PROJECT ENGR R.P. Wildman
SUBMITTED BY
CHIEF SEC
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .000
FRACTIONS ± 1/64
ANGLES ± 1°
DO NOT SCALE THIS PRINT
DIV. SEC. 272
THIS PRINT ISSUED
SHEET 1 OF 3

Figure 22(a).

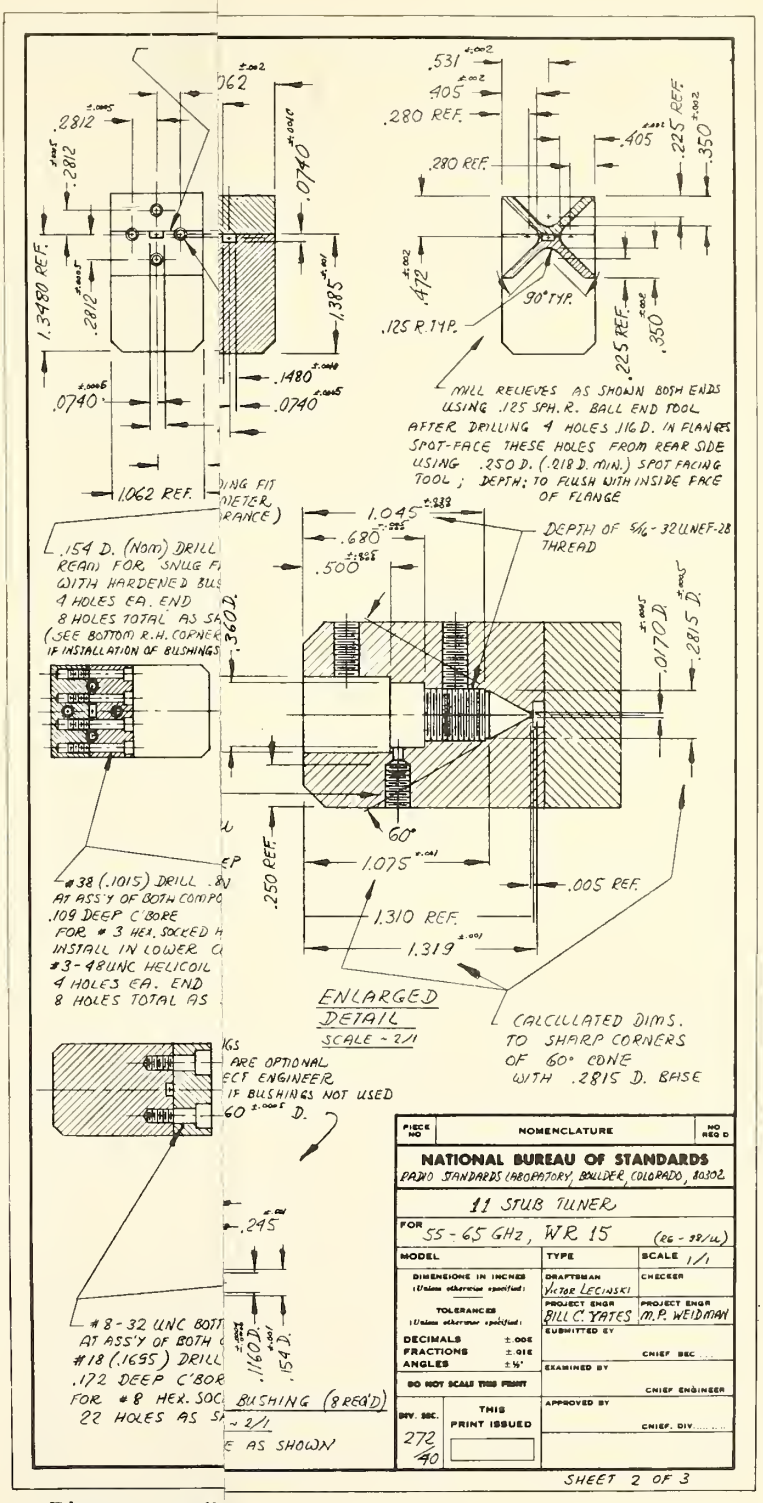
.531
.405
.280 REF.
.225 REF.
.350
.472
90° TYP.
.125 R. TYP.
MILL RELIEVES AS SHOWN BOTH ENDS USING .125 SPH. R. BALL END TOOL AFTER DRILLING 4 HOLES .116 D. IN FLANGES. SPOT-FACE THESE HOLES FROM REAR SIDE USING .250 D. (.218 D. MIN.) SPOT FACING TOOL; DEPTH: TO FLUSH WITH INSIDE FACE OF FLANGE
.2812
.3480 REF.
.0740
.1385
.1480
1.062 REF.
1.045
.680
.500
DEPTH OF 5/16-32 UNEF-2B THREAD
.360 D.
.0170 D.
.2815 D.
60°
.250 REF.
1.075
.005 REF.
1.310 REF.
1.319
ENLARGED DETAIL
SCALE ~ 2/1
CALCULATED DIMS. TO SHARP CORNERS OF 60° CONE WITH .2815 D. BASE
.154 D. (NOM.) DRILL
REAM FOR SNUG F
WITH HARDENED BUS
4 HOLES EA. END
8 HOLES TOTAL AS SA
(SEE BOTTOM R.H. CORNER
IF INSTALLATION OF BUSHINGS
#38 (.1015) DRILL .8
AT ASS'Y OF BOTH COMPO
.109 DEEP C'BORE
FOR #3 HEX. SOCKED H
INSTALL IN LOWER C
#3-48 UNC HELICOIL
4 HOLES EA. END
8 HOLES TOTAL AS
ARE OPTIONAL
ECT ENGINEER
IF BUSHINGS NOT USED
.245
#8-32 UNC BOTT
AT ASS'Y OF BOTH
#18 (.1695) DRILL
.172 DEEP C'BOR
FOR #8 HEX. SOC
22 HOLES AS SH
.160 D.
.154 D.
BUSHING (8 REQ'D)
~ 2/1
AS SHOWN
PIECE NO
NOMENCLATURE
NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
11 STUB TUNER
FOR 55 - 65 GHz, WR 15 (RG - 99/U)
MODEL
TYPE
SCALE 1/1
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± .01
ANGLES ± ½°
DRAFTSMAN VICTOR LECINSKI
CHECKER
PROJECT ENGR BILL C. YATES
PROJECT ENGR M.P. WEIDMAN
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
DO NOT SCALE THIS PRINT
APPROVED BY
CHIEF, DIV.
DIV. SEC. 272 / 40
THIS PRINT ISSUED
SHEET 2 OF 3

Figure 22(b

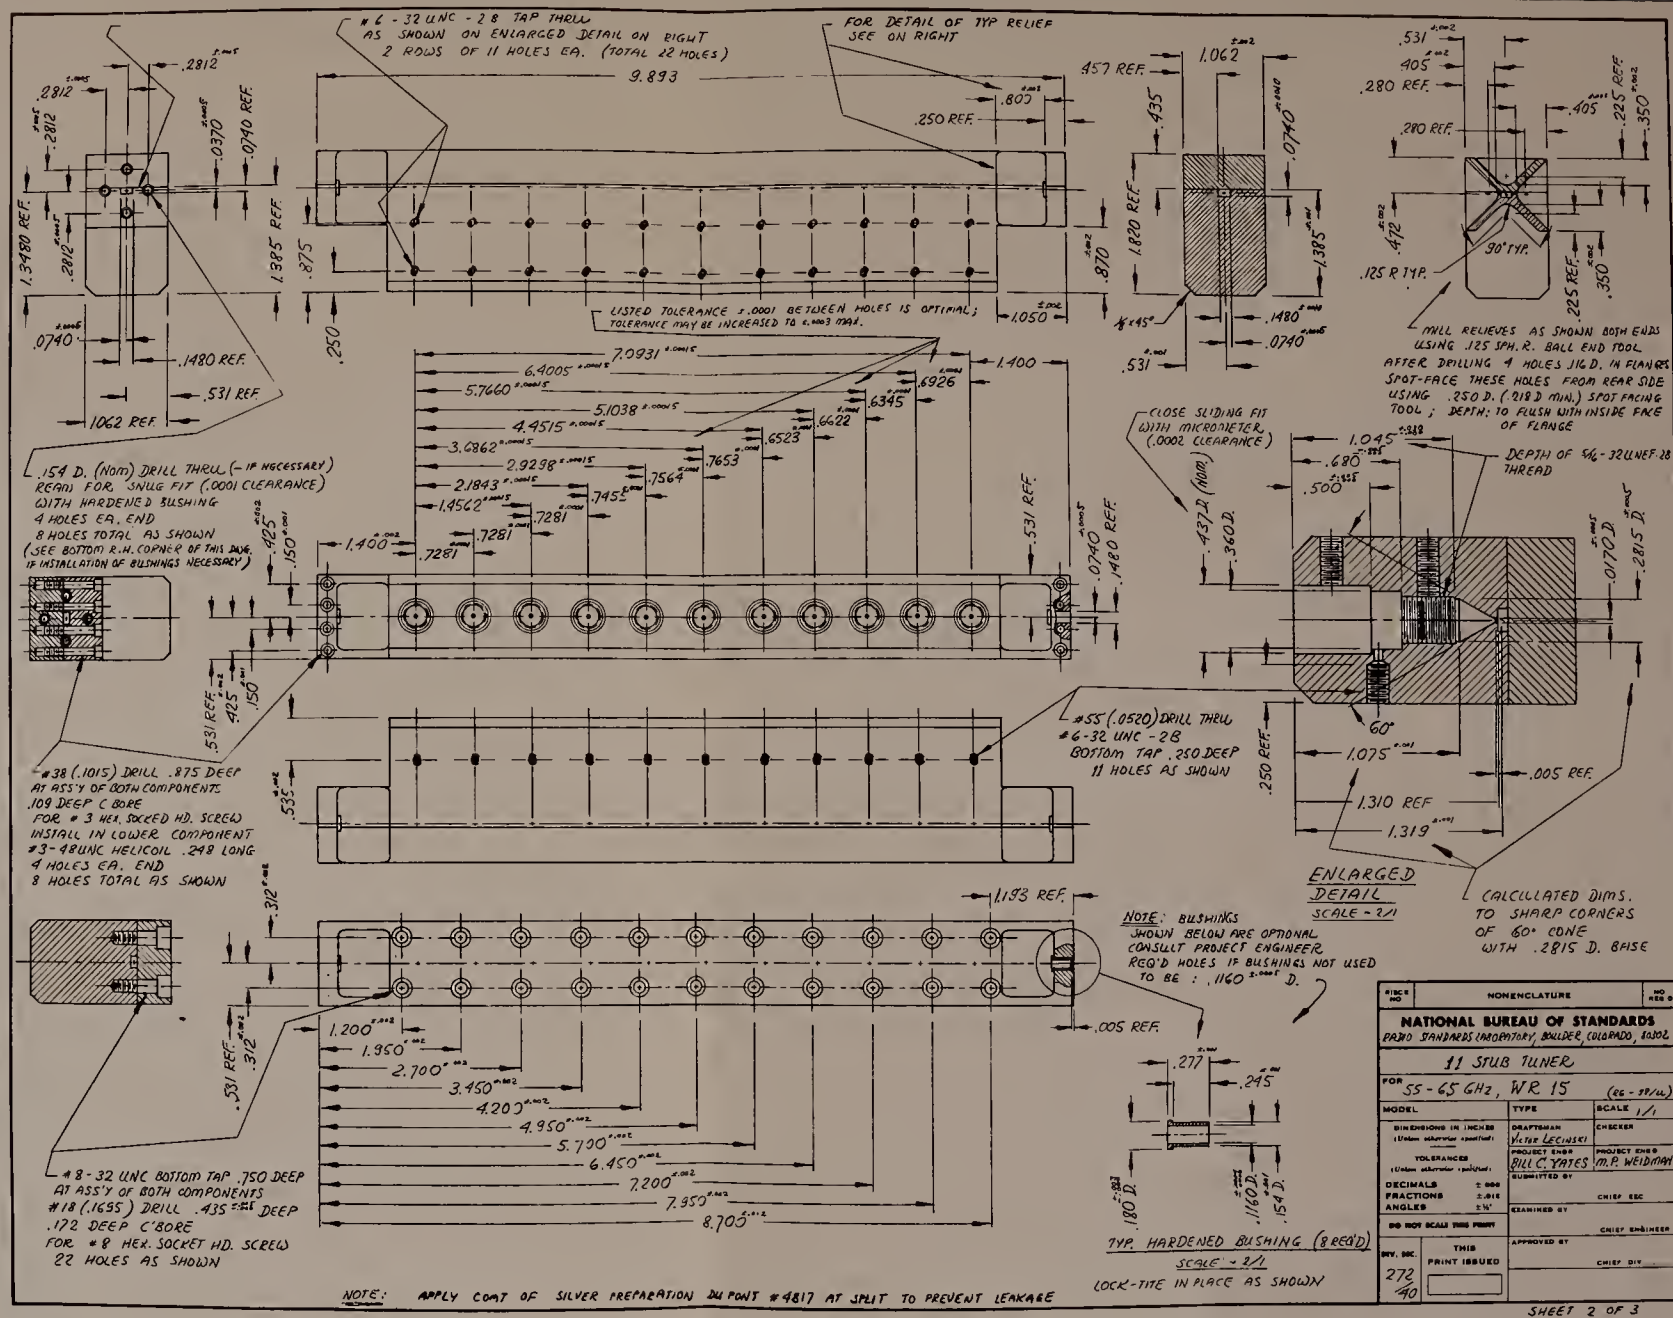
#6 - 32 UNC - 2B TAP THRU AS SHOWN ON ENLARGED DETAIL ON RIGHT 2 ROWS OF 11 HOLES EA. (TOTAL 22 HOLES)
FOR DETAIL OF TYP RELIEF SEE ON RIGHT
9.893
LISTED TOLERANCE ±.0001 BETWEEN HOLES IS OPTIMAL; TOLERANCE MAY BE INCREASED TO ±.0003 MAX.
.154 D. (NOM) DRILL THRU (- IF NECESSARY) REAM FOR SNUG FIT (.0001 CLEARANCE) WITH HARDENED BUSHING 4 HOLES EA. END 8 HOLES TOTAL AS SHOWN (SEE BOTTOM R.H. CORNER OF THIS DWG. IF INSTALLATION OF BUSHINGS NECESSARY)
#38 (.1015) DRILL .875 DEEP AT ASS'Y OF BOTH COMPONENTS .109 DEEP C'BORE FOR #3 HEX. SOCKET HD. SCREW INSTALL IN LOWER COMPONENT #3-48UNC HELICOIL .248 LONG 4 HOLES EA. END 8 HOLES TOTAL AS SHOWN
#8 - 32 UNC BOTTOM TAP .750 DEEP AT ASS'Y OF BOTH COMPONENTS #18 (.1695) DRILL .435 DEEP .172 DEEP C'BORE FOR #8 HEX. SOCKET HD. SCREW 22 HOLES AS SHOWN
#55 (.0520) DRILL THRU #6-32 UNC - 2B BOTTOM TAP .250 DEEP 11 HOLES AS SHOWN
MILL RELIEVES AS SHOWN BOTH ENDS USING .125 SPH. R. BALL END TOOL. AFTER DRILLING 4 HOLES .116 D. IN FLANGE SPOT-FACE THESE HOLES FROM REAR SIDE USING .250 D. (.218 D MIN.) SPOT FACING TOOL; DEPTH: TO FLUSH WITH INSIDE FACE OF FLANGE
CLOSE SLIDING FIT WITH MICROMETER (.0002 CLEARANCE)
DEPTH OF 5/16 - 32 UNEF-2B THREAD
ENLARGED DETAIL SCALE - 2/1
CALCULATED DIMS. TO SHARP CORNERS OF 60° CONE WITH .2815 D. BASE
NOTE: BUSHINGS SHOWN BELOW ARE OPTIONAL CONSULT PROJECT ENGINEER REQ'D HOLES IF BUSHINGS NOT USED TO BE: .1160 D.
TYP. HARDENED BUSHING (8 REQ'D) SCALE - 2/1
LOCK-TITE IN PLACE AS SHOWN
NOTE: APPLY COAT OF SILVER PREPARATION DU PONT #4817 AT SPLIT TO PREVENT LEAKAGE
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
11 STUB TUNER
FOR 55 - 65 GHz, WR 15 (RG - 99/U)
DRAFTSMAN VICTOR LECINSKI
CHECKER
PROJECT ENG'R BILL C. YATES
PROJECT ENG'R M.P. WEIDMAN
SCALE 1/1
DECIMALS ± .000
FRACTIONS ± .016
ANGLES ± ½°
DO NOT SCALE THIS PRINT
CHIEF ESC
CHIEF ENGINEER
CHIEF DIV.
DIV. 272 / 90
THIS PRINT ISSUED
SHEET 2 OF 3

Figure 22(b).

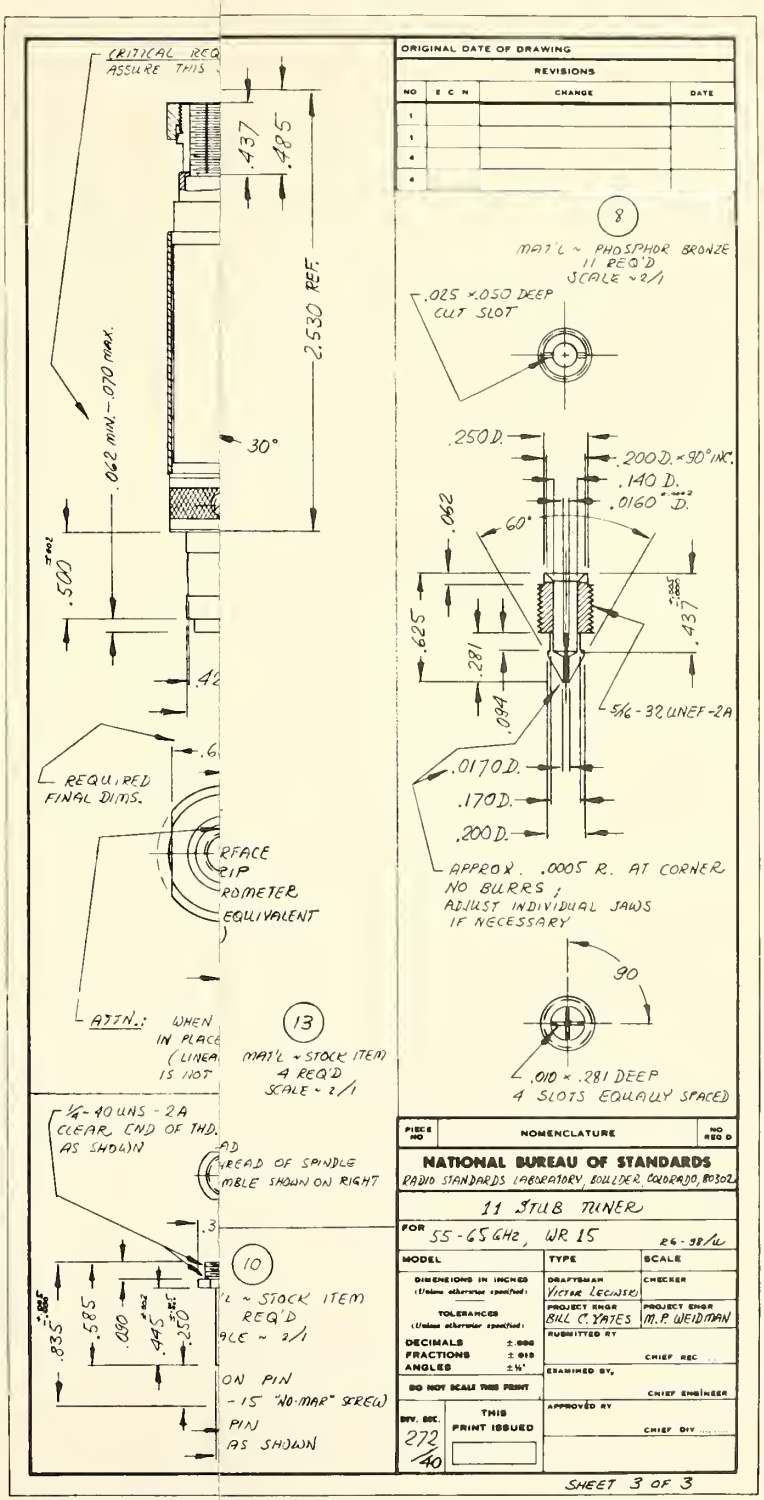
ORIGINAL DATE OF DRAWING
REVISIONS
NO
E C N
CHANGE
DATE
CRITICAL REQ
ASSURE THIS
.437
.485
2.530 REF.
.062 MIN. - .070 MAX.
30°
.500
.42
.6
REQUIRED
FINAL DIMS.
RFACE
2IP
ROMETER
EQUIVALENT
ATTN.: WHEN
IN PLACE
(LINEA
IS NOT
13
MAT'L ~ STOCK ITEM
4 REQ'D
SCALE ~ 2/1
1/4-40 UNS-2A
CLEAR END OF THD.
AS SHOWN
AD
READ OF SPINDLE
MBLE SHOWN ON RIGHT
.3
10
'L ~ STOCK ITEM
REQ'D
9CLE ~ 2/1
.835
.585
.000
.445
.250
ON PIN
-15 "NO-MAR" SCREW
PIN
AS SHOWN
8
MAT'L ~ PHOSPHOR BRONZE
11 REQ'D
SCALE ~ 2/1
.025 x .050 DEEP
CUT SLOT
.250 D.
.200 D. x 90° INC.
.140 D.
.0160 D.
.062
60°
.625
.281
.094
.437
5/16-32 UNEF-2A
.0170 D.
.170 D.
.200 D.
APPROX. .0005 R. AT CORNER
NO BURRS;
ADJUST INDIVIDUAL JAWS
IF NECESSARY
90
.010 x .281 DEEP
4 SLOTS EQUALLY SPACED
PIECE NO
NOMENCLATURE
NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
11 STUB TUNER
FOR 55-65 GHz, WR 15
RG-98/U
MODEL
TYPE
SCALE
DIMENSIONS IN INCHES
(Unless otherwise specified)
TOLERANCES
(Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± 1/16
ANGLES ± 1/2°
DO NOT SCALE THIS PRINT
DRAFTSMAN
VICTOR LECINSKI
CHECKER
PROJECT ENGR
BILL C. YATES
PROJECT ENGR
M.P. WEIDMAN
SUBMITTED BY
CHIEF REC
EXAMINED BY,
CHIEF ENGINEER
APPROVED BY
CHIEF DIV
DIV. SEC.
272
40
THIS
PRINT ISSUED
SHEET 3 OF 3

Figure 22(c

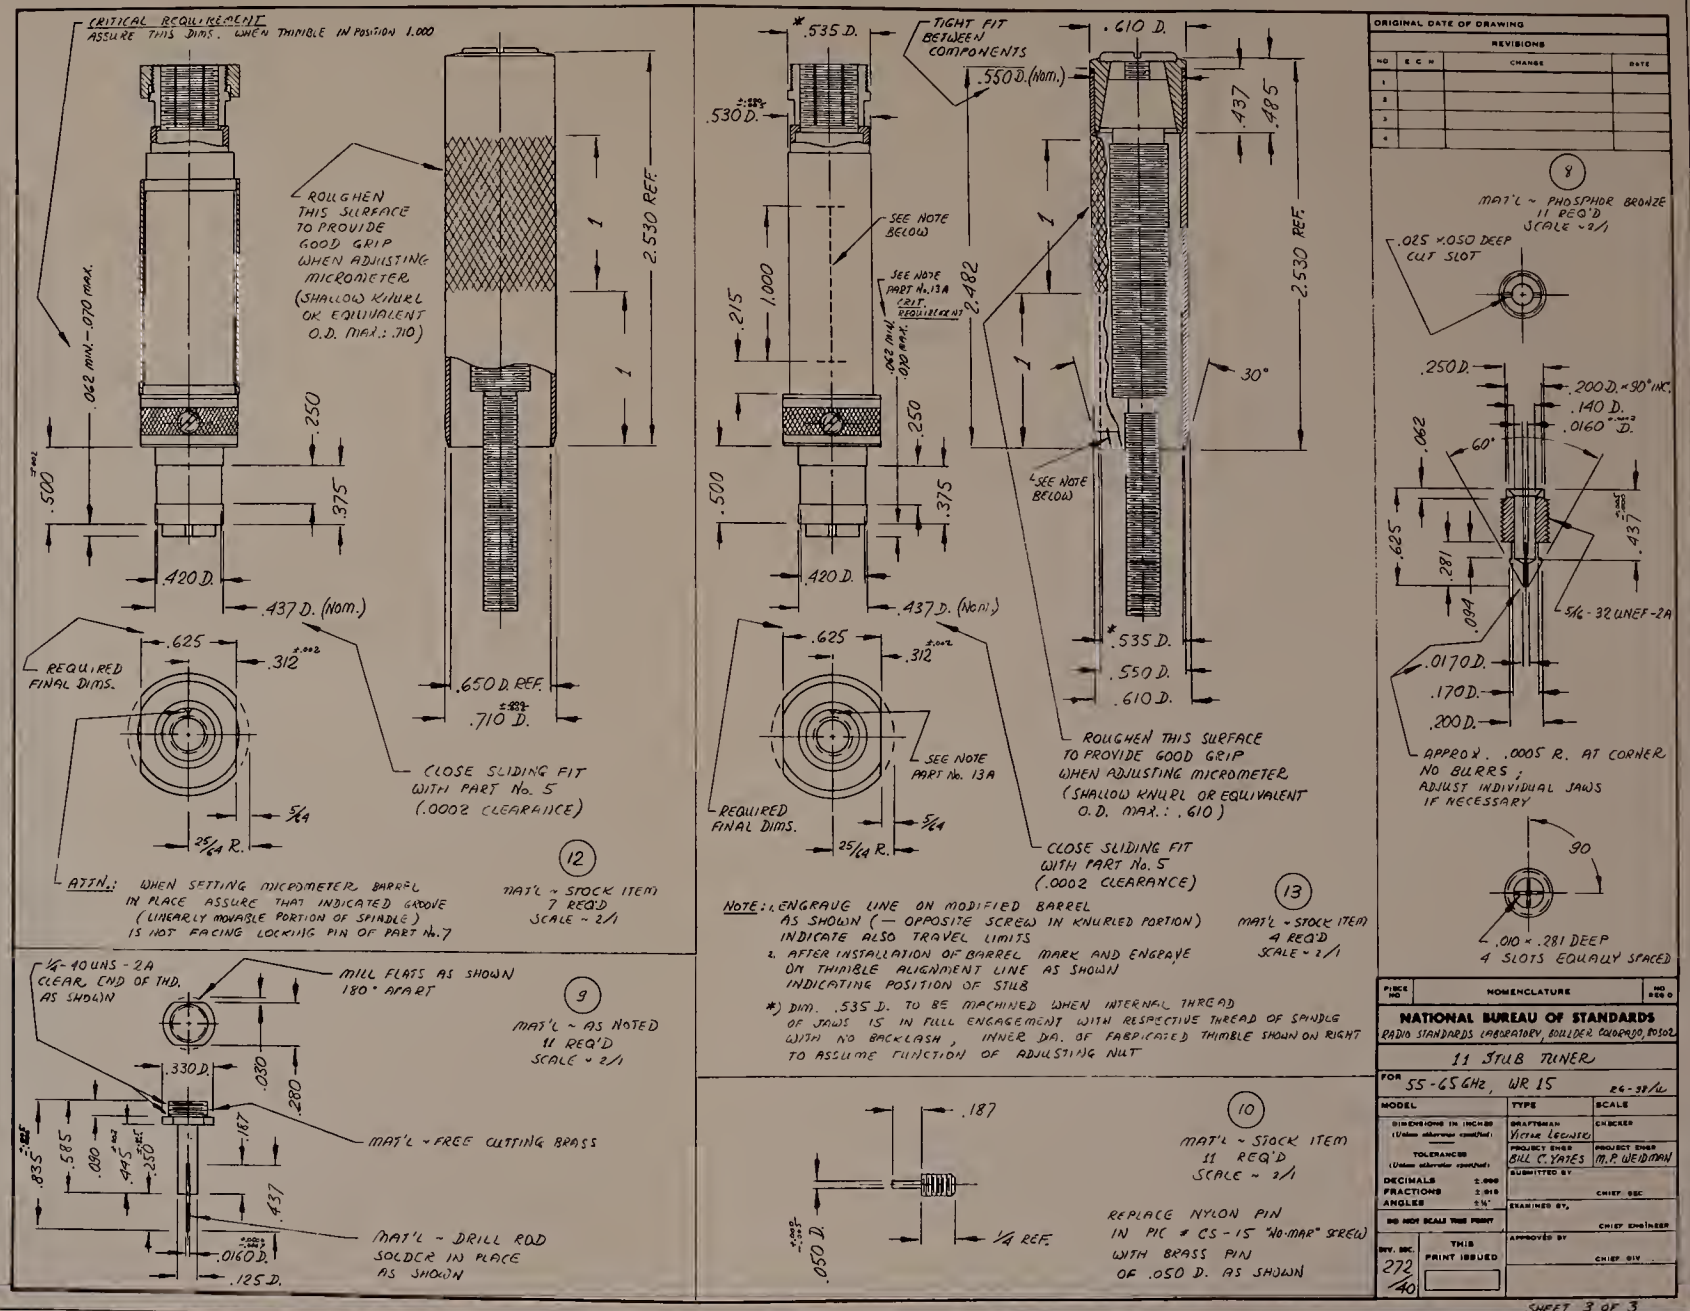
CRITICAL REQUIREMENT
ASSURE THIS DIMS. WHEN THIMBLE IN POSITION 1.000
.062 MIN. - .070 MAX.
ROUGHEN THIS SURFACE TO PROVIDE GOOD GRIP WHEN ADJUSTING MICROMETER. (SHALLOW KNURL OR EQUIVALENT O.D. MAX.: .710)
2.530 REF.
.500
.250
.375
.420 D.
.437 D. (Nom.)
.625
.312
REQUIRED FINAL DIMS.
.650 D. REF.
.710 D.
CLOSE SLIDING FIT WITH PART No. 5 (.0002 CLEARANCE)
5/64
25/64 R.
ATTN.: WHEN SETTING MICROMETER BARREL IN PLACE ASSURE THAT INDICATED GROOVE (LINEARLY MOVABLE PORTION OF SPINDLE) IS NOT FACING LOCKING PIN OF PART No. 7
12
MAT'L ~ STOCK ITEM
7 REQ'D
SCALE ~ 2/1
.535 D.
.530 D.
TIGHT FIT BETWEEN COMPONENTS
.550 D. (Nom.)
.610 D.
.437
.485
SEE NOTE BELOW
.215
1.000
SEE NOTE PART No. 13A (CRIT. REQUIREMENT)
.062 MIN.
.070 MAX.
2.482
30°
ROUGHEN THIS SURFACE TO PROVIDE GOOD GRIP WHEN ADJUSTING MICROMETER (SHALLOW KNURL OR EQUIVALENT O.D. MAX.: .610)
SEE NOTE PART No. 13A
NOTE: 1. ENGRAVE LINE ON MODIFIED BARREL AS SHOWN (— OPPOSITE SCREW IN KNURLED PORTION) INDICATE ALSO TRAVEL LIMITS
2. AFTER INSTALLATION OF BARREL MARK AND ENGRAVE ON THIMBLE ALIGNMENT LINE AS SHOWN INDICATING POSITION OF STUB
*) DIM. .535 D. TO BE MACHINED WHEN INTERNAL THREAD OF JAWS IS IN FULL ENGAGEMENT WITH RESPECTIVE THREAD OF SPINDLE WITH NO BACKLASH, INNER DIA. OF FABRICATED THIMBLE SHOWN ON RIGHT TO ASSUME FUNCTION OF ADJUSTING NUT
13
MAT'L ~ STOCK ITEM
4 REQ'D
SCALE ~ 2/1
1/4 - 40 UNS - 2A
CLEAR. END OF THD. AS SHOWN
MILL FLATS AS SHOWN 180° APART
.330 D.
.030
.280
.187
.585
.080
.445
.250
.035
.437
.0160 D.
.125 D.
MAT'L ~ FREE CUTTING BRASS
MAT'L ~ DRILL ROD SOLDER IN PLACE AS SHOWN
9
MAT'L ~ AS NOTED
11 REQ'D
SCALE ~ 2/1
.187
.050 D.
1/4 REF.
10
MAT'L ~ STOCK ITEM
11 REQ'D
SCALE ~ 2/1
REPLACE NYLON PIN IN PIC # CS-15 "NO-MAR" SCREW WITH BRASS PIN OF .050 D. AS SHOWN
8
MAT'L ~ PHOSPHOR BRONZE
11 REQ'D
SCALE ~ 2/1
.025 × .050 DEEP CUT SLOT
.250 D.
.200 D. × 90° INC.
.140 D.
.0160 D.
.062
60°
.625
.281
.437
.094
5/16 - 32 UNEF - 2A
.0170 D.
.170 D.
.200 D.
APPROX. .005 R. AT CORNER NO BURRS; ADJUST INDIVIDUAL JAWS IF NECESSARY
90
.010 × .281 DEEP
4 SLOTS EQUALLY SPACED
ORIGINAL DATE OF DRAWING
REVISIONS
NO | E C N | CHANGE | DATE
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER COLORADO, 80302
11 STUB TUNER
FOR 55-65 GHz, WR 15
26-38/1L
MODEL | TYPE | SCALE
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.000
FRACTIONS ±.015
ANGLES ±½°
DO NOT SCALE THIS PRINT
DRAFTSMAN Victor Lecuyer | ENGRD
PROJECT ENGR Bill C. Yates | PROJECT ENGR M. P. Weidman
SUBMITTED BY
CHIEF, SSC
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF, DIV.
DIV. SEC. 272/40
THIS PRINT ISSUED
SHEET 3 OF 3

Figure 22(c).

APPENDIX E

Machine drawing for sliding load

for WR15 waveguide.

Figure 23

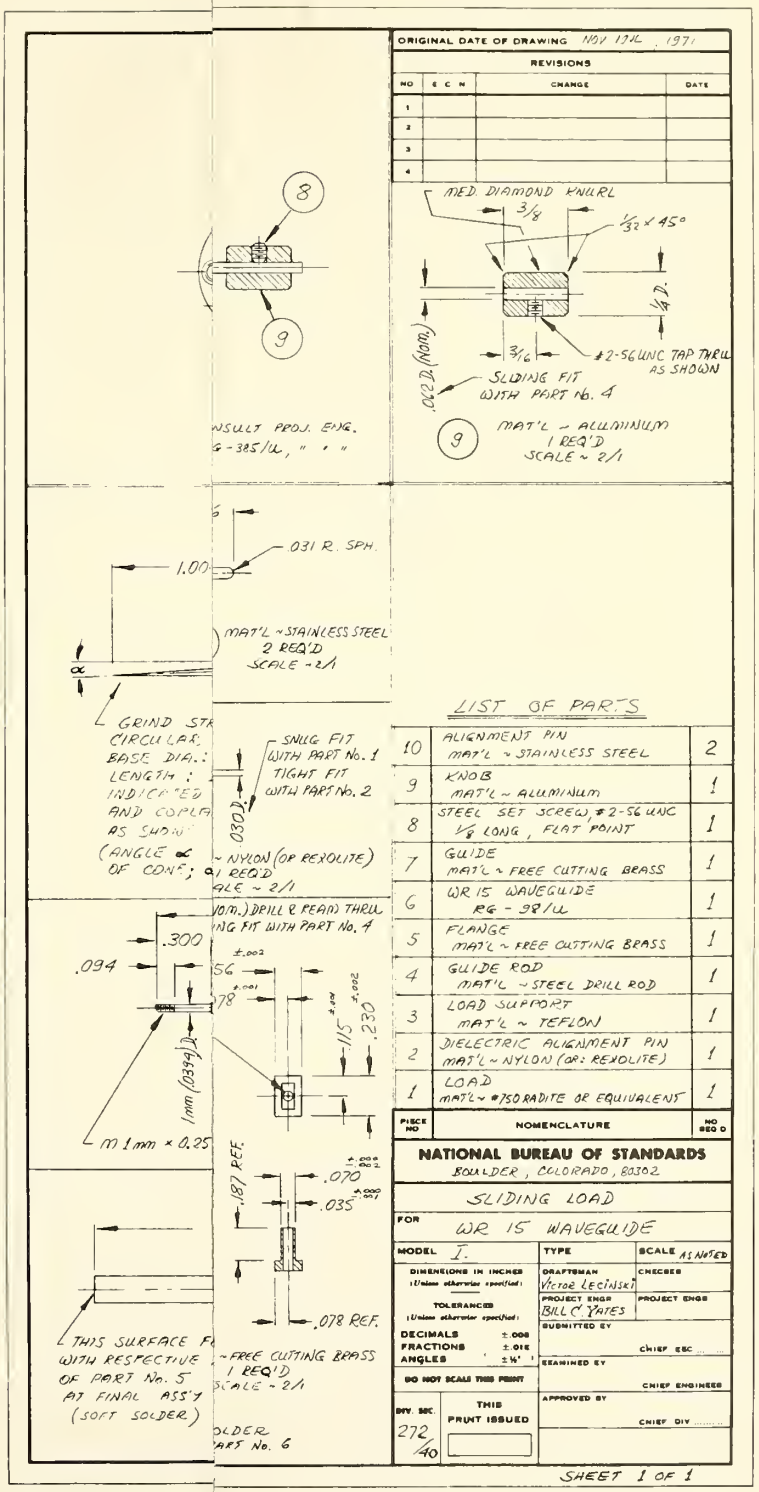
ORIGINAL DATE OF DRAWING NOV 17th, 1971
REVISIONS
NO | E C N | CHANGE | DATE
MED. DIAMOND KNURL
3/8
1/32 x 45°
1/4 D.
#2-56 UNC TAP THRU AS SHOWN
3/16
.062 D. (NOM.)
SLIDING FIT WITH PART No. 4
MAT'L ~ ALUMINUM
1 REQ'D
SCALE ~ 2/1
8
9
1.00
.031 R. SPH.
MAT'L ~ STAINLESS STEEL
2 REQ'D
SCALE ~ 2/1
SNUG FIT WITH PART No. 1
TIGHT FIT WITH PART No. 2
.030
.300
.094
.230
.115
.187 REF.
.070
.035
.078 REF.
LIST OF PARTS
10 ALIGNMENT PIN MAT'L ~ STAINLESS STEEL 2
9 KNOB MAT'L ~ ALUMINUM 1
8 STEEL SET SCREW #2-56 UNC 1/8 LONG, FLAT POINT 1
7 GUIDE MAT'L ~ FREE CUTTING BRASS 1
6 WR 15 WAVEGUIDE RG-98/U 1
5 FLANGE MAT'L ~ FREE CUTTING BRASS 1
4 GUIDE ROD MAT'L ~ STEEL DRILL ROD 1
3 LOAD SUPPORT MAT'L ~ TEFLON 1
2 DIELECTRIC ALIGNMENT PIN MAT'L ~ NYLON (OR: REXOLITE) 1
1 LOAD MAT'L ~ #750 RADITE OR EQUIVALENT 1
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
SLIDING LOAD
FOR WR 15 WAVEGUIDE
MODEL I.
TYPE
SCALE AS NOTED
DRAFTSMAN Victor Lecinski
CHECKED
PROJECT ENGR Bill C Yates
PROJECT ENGR
SUBMITTED BY
CHIEF ESC
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV
DIV. SEC. 272/40
THIS PRINT ISSUED
SHEET 1 OF 1

Figure 23.

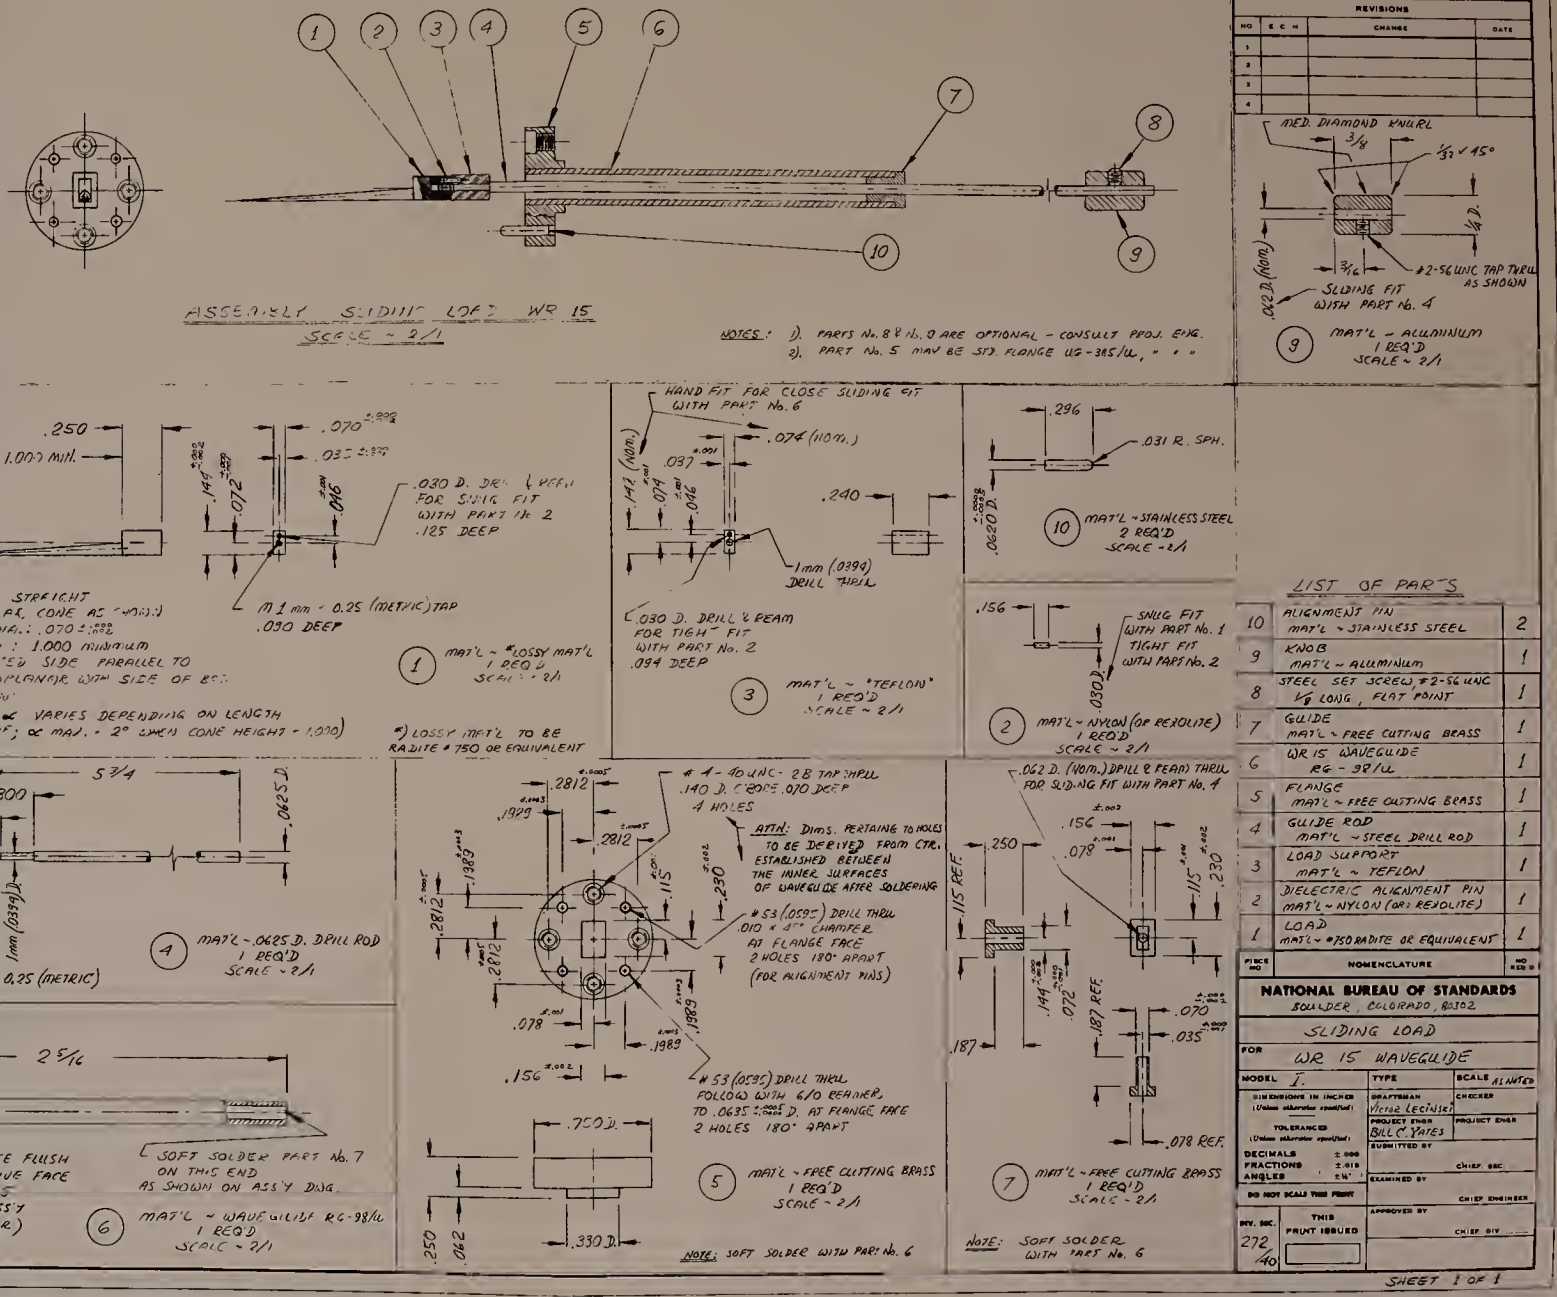
ORIGINAL DATE OF DRAWING NOV 17th, 1971
REVISIONS
NO | E C N | CHANGE | DATE
ASSEMBLY SLIDING LOAD WR 15
SCALE ~ 2/1
NOTES: 1). PARTS No. 8 & No. 9 ARE OPTIONAL - CONSULT PROJ. ENG.
2). PART No. 5 MAY BE STD. FLANGE UG-385/U, " " "
KNURL MED. DIAMOND
3/8
1/32 x 45°
1/4 D.
.062 D. (NOM.)
3/16
#2-56 UNC TAP THRU AS SHOWN
SLIDING FIT WITH PART No. 4
9 MAT'L ~ ALUMINUM 1 REQ'D SCALE ~ 2/1
.250
1.000 MIN.
.070 +.000 -.002
.035 ±.002
.149 +.002 -.000
.072 +.000 -.002
.046 +.001 -.000
.030 D. DRILL & REAM FOR SLIDING FIT WITH PART No. 2 .125 DEEP
GRIND STRAIGHT CIRCULAR CONE AS SHOWN BASE DIA.: .070 +.000 -.002 LENGTH: 1.000 MINIMUM INDICATED SIDE PARALLEL TO AND COPLANAR WITH SIDE OF BODY AS SHOWN (ANGLE ∝ VARIES DEPENDING ON LENGTH OF CONE; ∝ MAX. = 2° WHEN CONE HEIGHT = 1.000)
M 1 mm ~ 0.25 (METRIC) TAP .090 DEEP
1 MAT'L ~ *LOSSY MAT'L 1 REQ'D SCALE ~ 2/1
*) LOSSY MAT'L TO BE RADITE #750 OR EQUIVALENT
HAND FIT FOR CLOSE SLIDING FIT WITH PART No. 6
.074 (NOM.)
.037 +.001 -.000
.141 (NOM.)
.079 +.001 -.000
.046 +.001 -.000
.240
1 mm (.0394) DRILL THRU
.030 D. DRILL & REAM FOR TIGHT FIT WITH PART No. 2 .094 DEEP
3 MAT'L ~ "TEFLON" 1 REQ'D SCALE ~ 2/1
.296
.031 R. SPH.
.0620 +.0000 -.0005 D.
10 MAT'L ~ STAINLESS STEEL 2 REQ'D SCALE ~ 2/1
.156
SNUG FIT WITH PART No. 1 TIGHT FIT WITH PART No. 2
.030 D.
2 MAT'L ~ NYLON (OR REXOLITE) 1 REQ'D SCALE ~ 2/1
5 3/4
.300
.094
.0625 D.
1 mm (.0394)
M 1 mm x 0.25 (METRIC)
4 MAT'L ~ .0625 D. DRILL ROD 1 REQ'D SCALE ~ 2/1
.2812 +.000 -.0005
.1929 +.0003 -.0003
.1383 +.0003 -.0003
.2812 +.0005 -.0000
.2812 +.000 -.0005
.115 +.001 -.000
.230 +.002 -.000
4 - 40 UNC - 2B TAP THRU .140 D. C'BORE .070 DEEP 4 HOLES
ATTN: Dims. PERTAINING TO HOLES TO BE DERIVED FROM CTR. ESTABLISHED BETWEEN THE INNER SURFACES OF WAVEGUIDE AFTER SOLDERING
#53 (.0595) DRILL THRU .010 x 45° CHAMFER AT FLANGE FACE 2 HOLES 180° APART (FOR ALIGNMENT PINS)
.078 +.001 -.000
.1989 +.0003 -.0003
.1989 +.0003 -.0003
.156 +.002 -.000
#53 (.0595) DRILL THRU FOLLOW WITH 6/0 REAMER TO .0635 +.0005 -.0000 D. AT FLANGE FACE 2 HOLES 180° APART
.750 D.
.250
.062
.330 D.
5 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 2/1
NOTE: SOFT SOLDER WITH PART No. 6
.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT WITH PART No. 4
.156 +.002 -.000
.078 +.001 -.000
.250
.115 REF.
.115 +.001 -.000
.230 +.002 -.000
.144 +.000 -.002
.072 +.000 -.002
.187 REF.
.187
.070 +.000 -.002
.035 ±.002
.078 REF.
7 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 2/1
NOTE: SOFT SOLDER WITH PART No. 6
2 5/16
THIS SURFACE FLUSH WITH RESPECTIVE FACE OF PART No. 5 AT FINAL ASS'Y (SOFT SOLDER)
SOFT SOLDER PART No. 7 ON THIS END AS SHOWN ON ASS'Y DWG.
6 MAT'L ~ WAVEGUIDE RG-98/U 1 REQ'D SCALE ~ 2/1
LIST OF PARTS
10 ALIGNMENT PIN MAT'L ~ STAINLESS STEEL 2
9 KNOB MAT'L ~ ALUMINUM 1
8 STEEL SET SCREW, #2-56 UNC 1/8 LONG, FLAT POINT 1
7 GUIDE MAT'L ~ FREE CUTTING BRASS 1
6 WR 15 WAVEGUIDE RG-98/U 1
5 FLANGE MAT'L ~ FREE CUTTING BRASS 1
4 GUIDE ROD MAT'L ~ STEEL DRILL ROD 1
3 LOAD SUPPORT MAT'L ~ TEFLON 1
2 DIELECTRIC ALIGNMENT PIN MAT'L ~ NYLON (OR REXOLITE) 1
1 LOAD MAT'L ~ #750 RADITE OR EQUIVALENT 1
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
SLIDING LOAD
FOR WR 15 WAVEGUIDE
MODEL 1. TYPE SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .000
FRACTIONS ± .015
ANGLES ± 1/4°
DRAFTSMAN Victor Lecinski
CHECKER
PROJECT ENGR Bill C. Yates
PROJECT ENGR
SUBMITTED BY
CHIEF, SEC.
EXAMINED BY
CHIEF ENGINEER
DO NOT SCALE THIS PRINT
APPROVED BY
CHIEF DIV.
DIV. SEC. 272.40
THIS PRINT ISSUED
SHEET 1 OF 1

Figure 23.

APPENDIX F

Machine drawing for sliding dumbell short for WR15 waveguide.

Figure 24

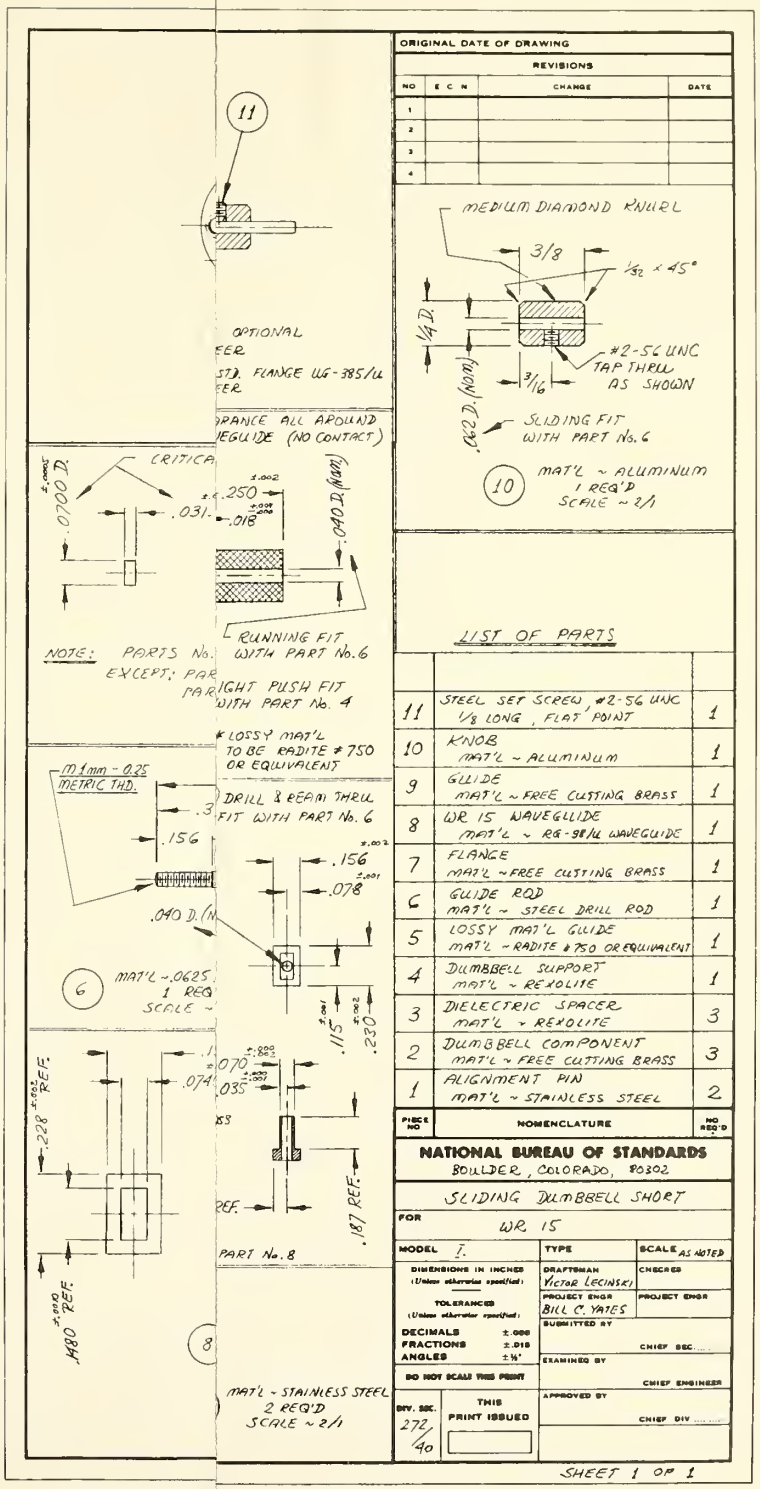
ORIGINAL DATE OF DRAWING
REVISIONS
NO | E C N | CHANGE | DATE
MEDIUM DIAMOND KNURL
3/8
1/32 x 45°
1/4 D.
#2-56 UNC TAP THRU AS SHOWN
3/16
.162 D. (NOM.)
SLIDING FIT WITH PART No. 6
10 MAT'L ~ ALUMINUM 1 REQ'D SCALE ~ 2/1
OPTIONAL
FLANGE UG-385/U
.0700 D.
.250
.031
.018
.040 D. (NOM.)
RUNNING FIT WITH PART No. 6
NOTE: PARTS No.
EXCEPT: PAR
RIGHT PUSH FIT WITH PART No. 4
* LOSSY MAT'L TO BE RADITE #750 OR EQUIVALENT
M1mm ~ 0.25 METRIC THD.
DRILL & REAM THRU FIT WITH PART No. 6
.156
.078
.040 D.
6 MAT'L ~ .0625 1 REQ SCALE ~
.115
.230
.070
.074
.035
.228 REF.
.187 REF.
PART No. 8
.480 REF.
8 MAT'L ~ STAINLESS STEEL 2 REQ'D SCALE ~ 2/1
LIST OF PARTS
11 STEEL SET SCREW, #2-56 UNC 1/8 LONG, FLAT POINT 1
10 KNOB MAT'L ~ ALUMINUM 1
9 GLIDE MAT'L ~ FREE CUTTING BRASS 1
8 WR 15 WAVEGLIDE MAT'L ~ RG-98/U WAVEGUIDE 1
7 FLANGE MAT'L ~ FREE CUTTING BRASS 1
6 GLIDE ROD MAT'L ~ STEEL DRILL ROD 1
5 LOSSY MAT'L GLIDE MAT'L ~ RADITE #750 OR EQUIVALENT 1
4 DUMBBELL SUPPORT MAT'L ~ REXOLITE 1
3 DIELECTRIC SPACER MAT'L ~ REXOLITE 3
2 DUMBBELL COMPONENT MAT'L ~ FREE CUTTING BRASS 3
1 ALIGNMENT PIN MAT'L ~ STAINLESS STEEL 2
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
SLIDING DUMBBELL SHORT
FOR WR 15
MODEL I. | TYPE | SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.000
FRACTIONS ±.015
ANGLES ±½°
DRAFTSMAN Victor Lecinski | CHECKED
PROJECT ENGR Bill C. Yates | PROJECT ENGR
SUBMITTED BY | CHIEF SEC.
EXAMINED BY | CHIEF ENGINEER
DO NOT SCALE THIS PRINT
APPROVED BY | CHIEF DIV.
DIV. SEC. 272/40
THIS PRINT ISSUED
SHEET 1 OF 1

Figure 24

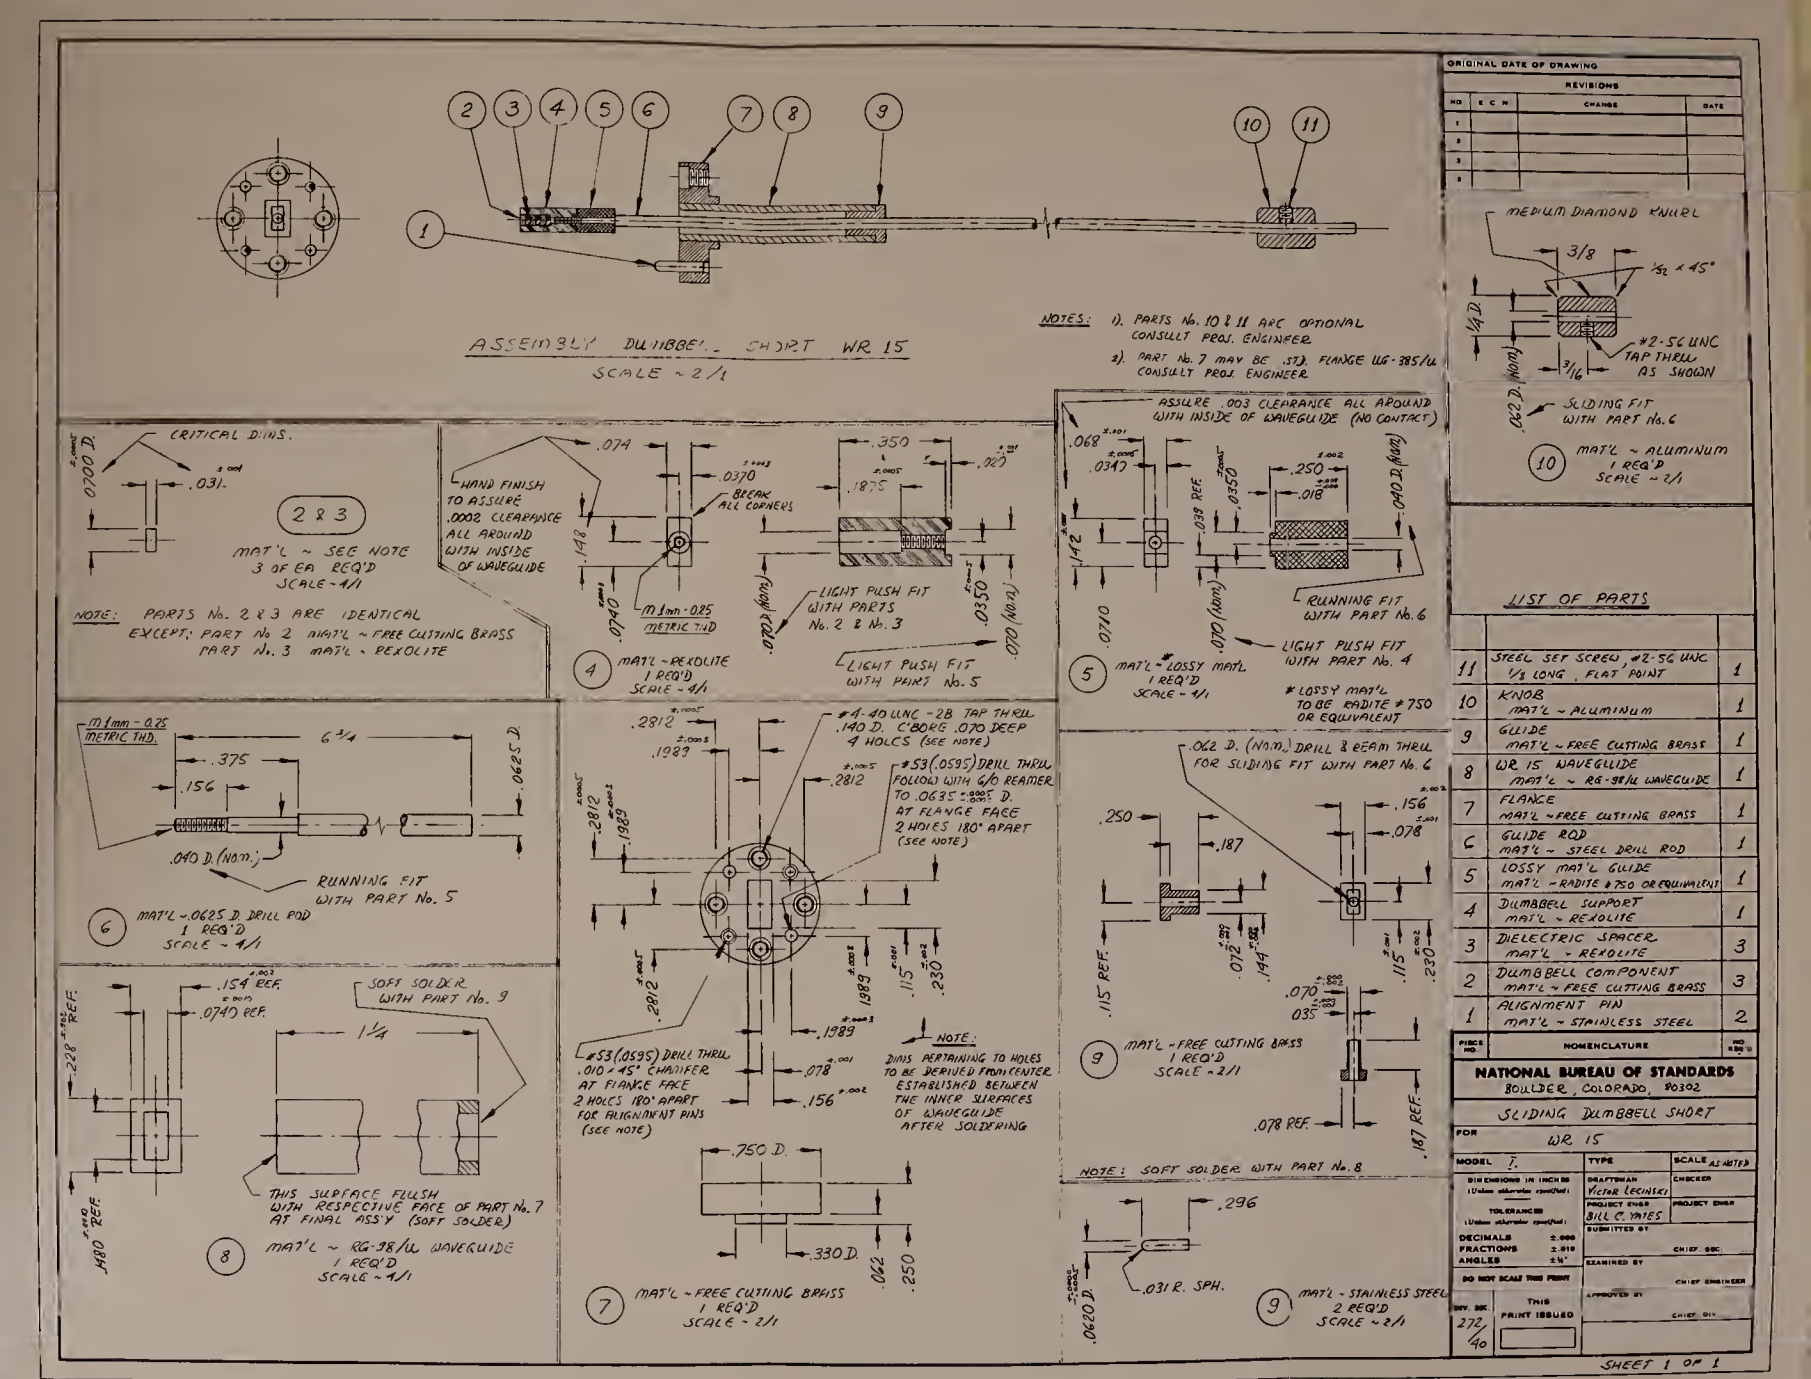
ASSEMBLY DUMBBELL SHORT WR 15
SCALE ~ 2/1
NOTES: 1). PARTS No. 10 & 11 ARE OPTIONAL CONSULT PROJ. ENGINEER
2). PART No. 7 MAY BE STD. FLANGE UG-385/U CONSULT PROJ. ENGINEER
ORIGINAL DATE OF DRAWING
REVISIONS
NO | E C N | CHANGE | DATE
MEDIUM DIAMOND KNURL
3/8
1/32 x 45°
#2-56 UNC TAP THRU AS SHOWN
3/16
.062 D. (NOM.)
SLIDING FIT WITH PART No. 6
10 MAT'L ~ ALUMINUM 1 REQ'D SCALE ~ 2/1
CRITICAL DIMS.
.0700 D.
.031
2 & 3
MAT'L ~ SEE NOTE 3 OF EA REQ'D SCALE ~ 4/1
NOTE: PARTS No. 2 & 3 ARE IDENTICAL EXCEPT: PART No 2 MAT'L ~ FREE CUTTING BRASS PART No. 3 MAT'L ~ REXOLITE
HAND FINISH TO ASSURE .0002 CLEARANCE ALL AROUND WITH INSIDE OF WAVEGUIDE
.074
.0370
BREAK ALL CORNERS
.148
M1mm - 0.25 METRIC THD.
.0740
.350
.1875
.020
.0210 (NOM.)
LIGHT PUSH FIT WITH PARTS No. 2 & No. 3
.0350 (NOM.)
.070 (NOM.)
LIGHT PUSH FIT WITH PART No. 5
4 MAT'L ~ REXOLITE 1 REQ'D SCALE ~ 4/1
ASSURE .003 CLEARANCE ALL AROUND WITH INSIDE OF WAVEGUIDE (NO CONTACT)
.068
.0347
.142
.039 REF.
.350
.250
.018
.040 D. (NOM.)
.0710
.070 (NOM.)
RUNNING FIT WITH PART No. 6
LIGHT PUSH FIT WITH PART No. 4
5 MAT'L ~ LOSSY MAT'L 1 REQ'D SCALE ~ 1/1
* LOSSY MAT'L TO BE RADITE #750 OR EQUIVALENT
M1mm - 0.25 METRIC THD.
6 3/4
.375
.156
.0625 D.
.040 D. (NOM.)
RUNNING FIT WITH PART No. 5
6 MAT'L ~ .0625 D. DRILL ROD 1 REQ'D SCALE ~ 4/1
.2812
.1989
#4-40 UNC-2B TAP THRU .140 D. C'BORE .070 DEEP 4 HOLES (SEE NOTE)
#53 (.0595) DRILL THRU, FOLLOW WITH 6/0 REAMER TO .0635 D. AT FLANGE FACE 2 HOLES 180° APART (SEE NOTE)
.115
.230
#53 (.0595) DRILL THRU .010 x 45° CHAMFER AT FLANGE FACE 2 HOLES 180° APART FOR ALIGNMENT PINS (SEE NOTE)
.078
.156
NOTE: DIMS PERTAINING TO HOLES TO BE DERIVED FROM CENTER ESTABLISHED BETWEEN THE INNER SURFACES OF WAVEGUIDE AFTER SOLDERING
.750 D.
.330 D.
.062
.250
7 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 2/1
.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT WITH PART No. 6
.250
.187
.156
.078
.115 REF.
.072
.144
.115
.230
.070
.035
.078 REF.
.187 REF.
9 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 2/1
NOTE: SOLDER WITH PART No. 8
.154 REF.
.0740 REF.
SOLDER WITH PART No. 9
1 1/4
.228 REF.
.480 REF.
THIS SURFACE FLUSH WITH RESPECTIVE FACE OF PART No. 7 AT FINAL ASS'Y (SOFT SOLDER)
8 MAT'L ~ RG-98/U WAVEGUIDE 1 REQ'D SCALE ~ 4/1
.296
.031 R. SPH.
.0620 D.
9 MAT'L ~ STAINLESS STEEL 2 REQ'D SCALE ~ 2/1
LIST OF PARTS
11 STEEL SET SCREW, #2-56 UNC 1/8 LONG, FLAT POINT 1
10 KNOB MAT'L ~ ALUMINUM 1
9 GUIDE MAT'L ~ FREE CUTTING BRASS 1
8 WR 15 WAVEGUIDE MAT'L ~ RG-98/U WAVEGUIDE 1
7 FLANCE MAT'L ~ FREE CUTTING BRASS 1
6 GUIDE ROD MAT'L ~ STEEL DRILL ROD 1
5 LOSSY MAT'L GUIDE MAT'L ~ RADITE #750 OR EQUIVALENT 1
4 DUMBBELL SUPPORT MAT'L ~ REXOLITE 1
3 DIELECTRIC SPACER MAT'L ~ REXOLITE 3
2 DUMBBELL COMPONENT MAT'L ~ FREE CUTTING BRASS 3
1 ALIGNMENT PIN MAT'L ~ STAINLESS STEEL 2
PIECE NO. | NOMENCLATURE | REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
SLIDING DUMBBELL SHORT
FOR WR 15
MODEL 7. | TYPE | SCALE AS NOTED
DRAFTSMAN Victor Leciner | CHECKER
PROJECT ENGR Bill C. Yates | PROJECT ENGR
SUBMITTED BY | CHIEF SEC.
EXAMINED BY | CHIEF ENGINEER
APPROVED BY | CHIEF DIV.
DIV. SEC. 272/40 | THIS PRINT ISSUED
DECIMALS ±.005
FRACTIONS ±.010
ANGLES ±½°
DO NOT SCALE THIS PRINT
SHEET 1 OF 1

Figure 24.

APPENDIX G

Machine drawing for four piece brass and invar precision waveguide section for WR15.

Figures 25(a), 25(b), 25(c).

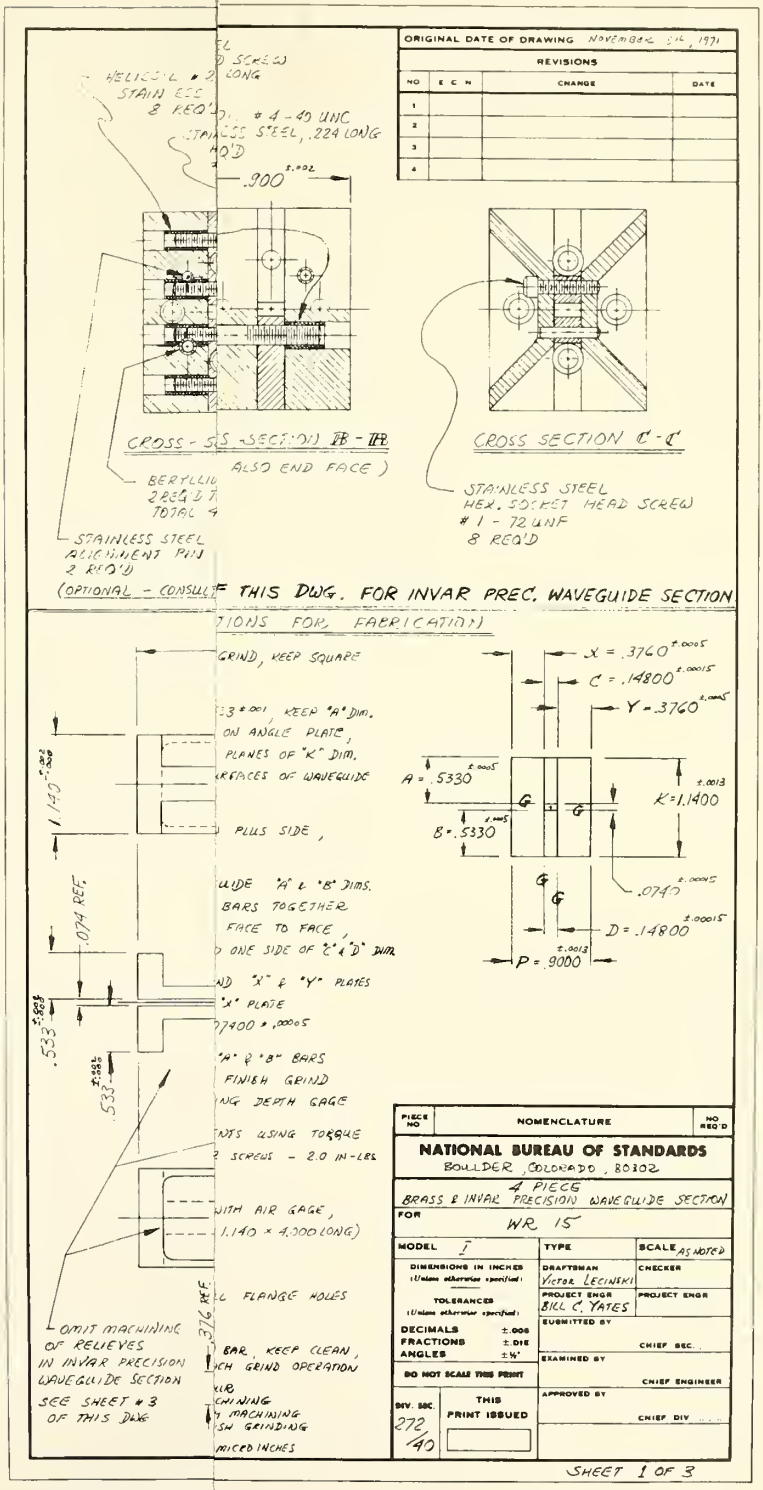
ORIGINAL DATE OF DRAWING NOVEMBER 5TH, 1971
REVISIONS
NO | E C N | CHANGE | DATE
HELICOIL # 2 STAINLESS 8 REQ'D
4 - 40 UNC STAINLESS STEEL, .224 LONG HD'D
.300 ±.002
CROSS - SECTION FB - FB (ALSO END FACE)
CROSS SECTION C - C
BERYLLIUM 2 REQ'D TOTAL 4
STAINLESS STEEL ALIGNMENT PIN 2 REQ'D
STAINLESS STEEL HEX. SOCKET HEAD SCREW # 1 - 72 UNF 8 REQ'D
(OPTIONAL - CONSULT THIS DWG. FOR INVAR PREC. WAVEGUIDE SECTION
FABRICATION)
GRIND, KEEP SQUARE
ON ANGLE PLATE,
PLANES OF "K" DIM.
FACES OF WAVEGUIDE
PLUS SIDE,
BARS TOGETHER
FACE TO FACE,
ONE SIDE OF "C" & "D" DIM.
"X" & "Y" PLATES
"A" & "B" BARS
FINISH GRIND
WITH AIR GAGE,
1.140 x 4.300 (LONG)
FLANGE HOLES
BAR, KEEP CLEAN,
OMIT MACHINING OF RELIEVES IN INVAR PRECISION WAVEGUIDE SECTION
SEE SHEET # 3 OF THIS DWG
.074 REF
.376 REF
X = .3760 ±.0005
C = .14800 ±.00015
Y = .3760 ±.0005
A = .5330 ±.0005
B = .5330 ±.0005
K = 1.1400 ±.0013
.074 ±.00015
D = .14800 ±.00015
P = .9000 ±.0013
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
4 PIECE BRASS & INVAR PRECISION WAVEGUIDE SECTION FOR WR 15
MODEL I
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.005
FRACTIONS ±.015
ANGLES ±½°
DRAFTSMAN Victor Lecinski
CHECKER
PROJECT ENGR Bill C. Yates
PROJECT ENGR
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
DO NOT SCALE THIS PRINT
DIV. SEC. 272 / 40
THIS PRINT ISSUED
APPROVED BY
CHIEF DIV.
SHEET 1 OF 3

Figure 25(

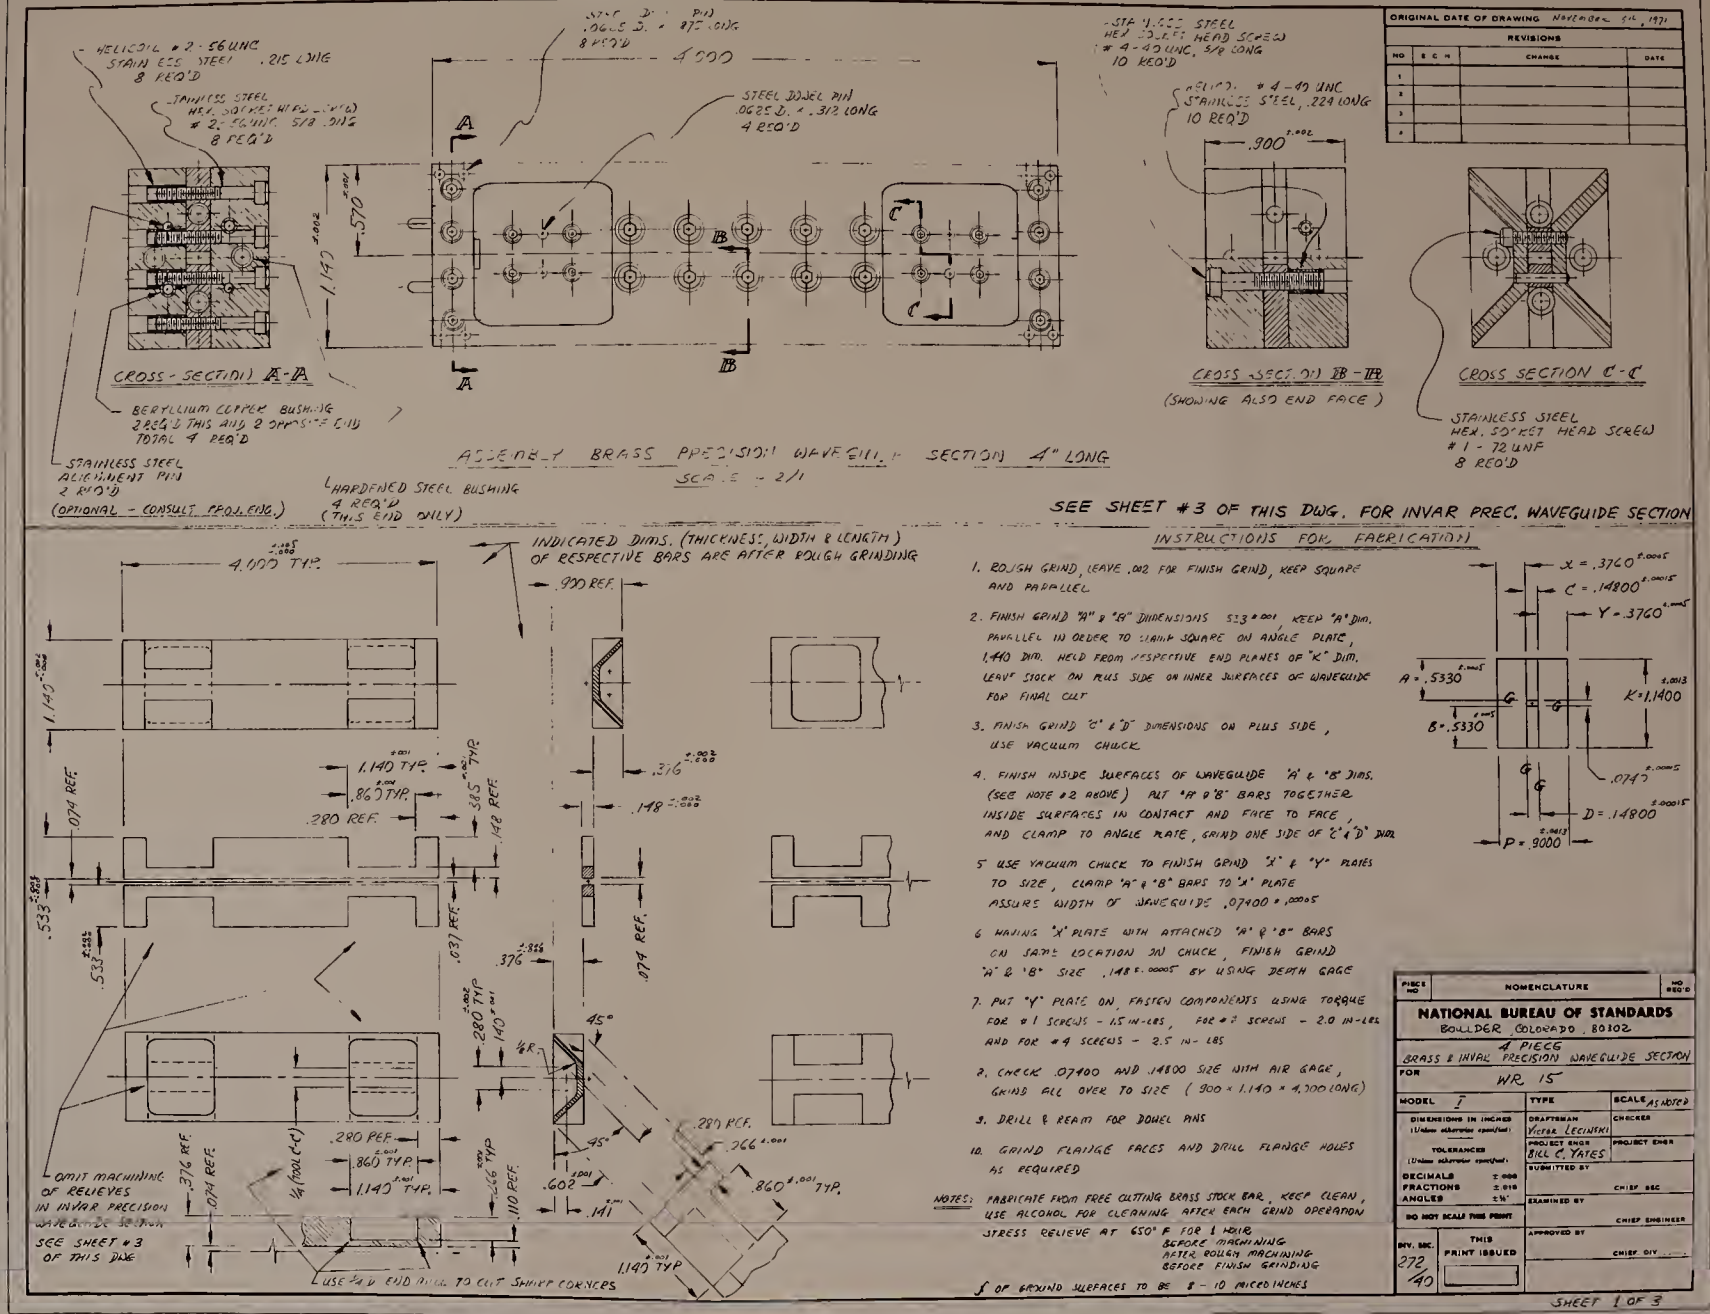
ORIGINAL DATE OF DRAWING NOVEMBER 9th, 1971
REVISIONS
NO | BY | CHANGE | DATE
HELICOIL # 2 - 56 UNC STAINLESS STEEL .215 LONG 8 REQ'D
STAINLESS STEEL HEX. SOCKET HEAD SCREW # 2 - 56 UNC. 5/8 LONG 8 REQ'D
.375 D. PIN .062 D. x .875 LONG 8 REQ'D
4.000
STEEL DOWEL PIN .062 D. x .312 LONG 4 REQ'D
STAINLESS STEEL HEX. SOCKET HEAD SCREW # 4 - 40 UNC. 5/8 LONG 10 REQ'D
HELICOIL # 4 - 40 UNC STAINLESS STEEL, .224 LONG 10 REQ'D
.900
.570
1.140
CROSS - SECTION A-A
CROSS SECT. ON BB - TYP.
(SHOWING ALSO END FACE)
CROSS SECTION C-C
BERYLLIUM COPPER BUSHING 2 REQ'D THIS END 2 OPPOSITE END TOTAL 4 REQ'D
STAINLESS STEEL ALIGNMENT PIN 2 REQ'D (OPTIONAL - CONSULT PROJ. ENG.)
HARDENED STEEL BUSHING 4 REQ'D (THIS END ONLY)
STAINLESS STEEL HEX. SOCKET HEAD SCREW # 1 - 72 UNF 8 REQ'D
ASSEMBLY BRASS PRECISION WAVEGUIDE SECTION 4" LONG
SCALE - 2/1
SEE SHEET #3 OF THIS DWG. FOR INVAR PREC. WAVEGUIDE SECTION
INDICATED DIMS. (THICKNESS, WIDTH & LENGTH) OF RESPECTIVE BARS ARE AFTER ROUGH GRINDING
4.000 TYP.
.900 REF.
1.140 TYP.
.860 TYP.
.280 REF.
.074 REF.
.376
.148
.533
.037 REF.
45°
4R
.602
.141
.266
.110 REF.
OMIT MACHINING OF RELIEVES IN INVAR PRECISION WAVEGUIDE SECTION SEE SHEET #3 OF THIS DWG
1/4 TOOL (REF.)
USE 1/4 D END MILL TO CUT SHARP CORNERS
INSTRUCTIONS FOR FABRICATION
1. ROUGH GRIND, LEAVE .002 FOR FINISH GRIND, KEEP SQUARE AND PARALLEL
2. FINISH GRIND "A" & "B" DIMENSIONS .533 ±.001, KEEP "A" DIM. PARALLEL IN ORDER TO MAINTAIN SQUARE ON ANGLE PLATE, 1.140 DIM. HELD FROM RESPECTIVE END PLANES OF "K" DIM. LEAVE STOCK ON PLUS SIDE ON INNER SURFACES OF WAVEGUIDE FOR FINAL CUT
3. FINISH GRIND "C" & "D" DIMENSIONS ON PLUS SIDE, USE VACUUM CHUCK
4. FINISH INSIDE SURFACES OF WAVEGUIDE "A" & "B" DIMS. (SEE NOTE #2 ABOVE) PUT "A" & "B" BARS TOGETHER INSIDE SURFACES IN CONTACT AND FACE TO FACE, AND CLAMP TO ANGLE PLATE, GRIND ONE SIDE OF "C" & "D" DIM.
5. USE VACUUM CHUCK TO FINISH GRIND "X" & "Y" PLATES TO SIZE, CLAMP "A" & "B" BARS TO "X" PLATE ASSURE WIDTH OF WAVEGUIDE .07400 ± .00005
6. HAVING "X" PLATE WITH ATTACHED "A" & "B" BARS ON SAME LOCATION ON CHUCK, FINISH GRIND "A" & "B" SIZE .148 ±.00005 BY USING DEPTH GAGE
7. PUT "Y" PLATE ON, FASTEN COMPONENTS USING TORQUE FOR #1 SCREWS - 1.5 IN-LBS, FOR #2 SCREWS - 2.0 IN-LBS AND FOR #4 SCREWS - 2.5 IN-LBS
8. CHECK .07400 AND .14800 SIZE WITH AIR GAGE, GRIND ALL OVER TO SIZE (.900 x 1.140 x 4.000 LONG)
9. DRILL & REAM FOR DOWEL PINS
10. GRIND FLANGE FACES AND DRILL FLANGE HOLES AS REQUIRED
NOTES: FABRICATE FROM FREE CUTTING BRASS STOCK BAR, KEEP CLEAN, USE ALCOHOL FOR CLEANING AFTER EACH GRIND OPERATION
STRESS RELIEVE AT 650° F FOR 1 HOUR BEFORE MACHINING AFTER ROUGH MACHINING BEFORE FINISH GRINDING
√ OF GROUND SURFACES TO BE 8 - 10 MICRO INCHES
X = .3760 ±.0005
C = .14800 ±.00015
Y = .3760 ±.0005
A = .5330 ±.0005
K = 1.1400 ±.0013
B = .5330 ±.0005
.0747 ±.00015
D = .14800 ±.00015
P = .9000 ±.0013
PIECE NO. | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO 80302
4 PIECE BRASS & INVAR PRECISION WAVEGUIDE SECTION FOR WR 15
MODEL I
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .000
FRACTIONS ± 1/16
ANGLES ± 1°
DRAFTSMAN Victor Lecinski
CHECKER
PROJECT ENGR Bill C. Yates
PROJECT ENGR
SUBMITTED BY
CHIEF SEC
DO NOT SCALE THIS PRINT
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIV. SEC. 272.10
THIS PRINT ISSUED
SHEET 1 OF 3

Figure 25(a).

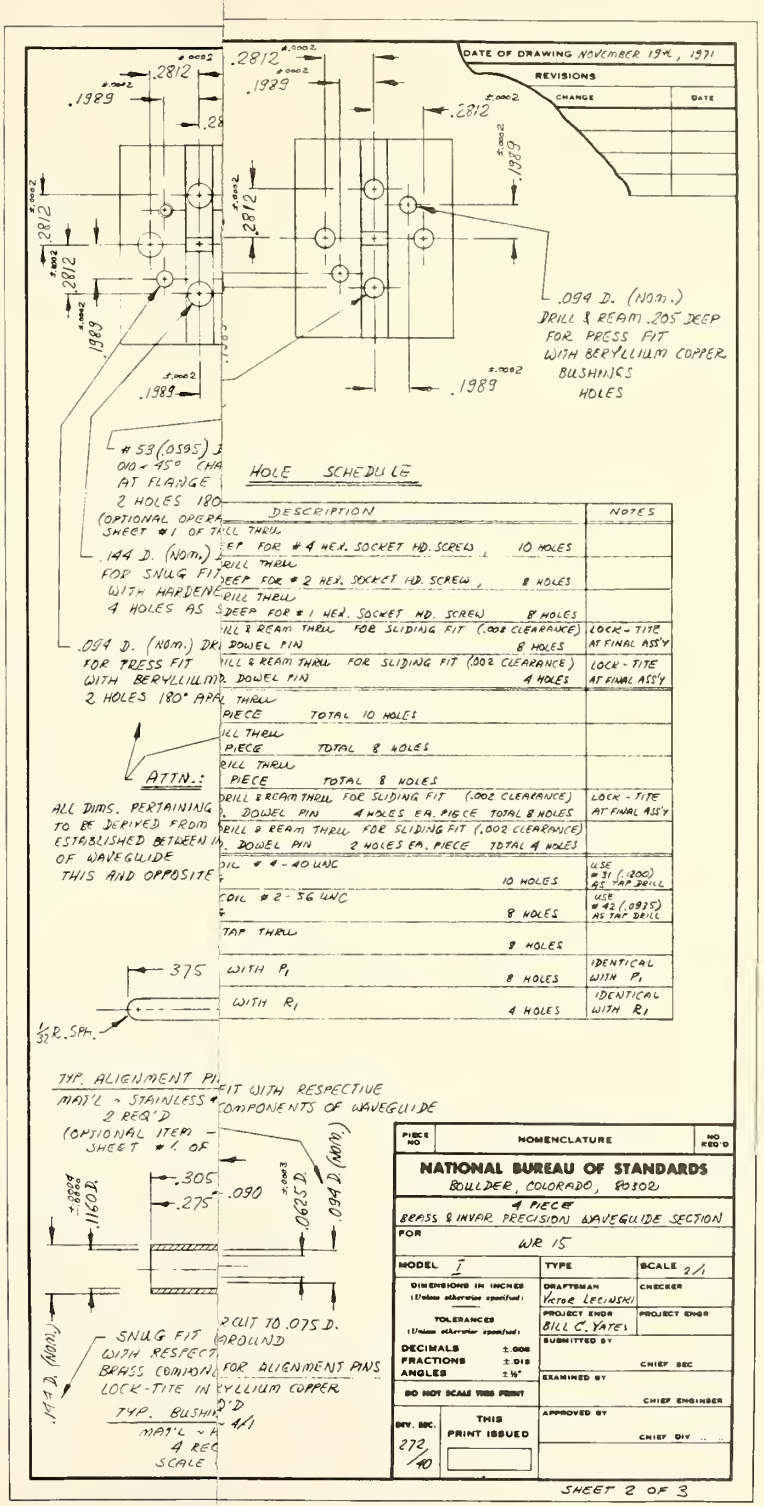

DESCRIPTION		NOTES
EP FOR #4 HEX. SOCKET HD. SCREWS	10 HOLES	
DEEP FOR #2 HEX. SOCKET HD. SCREW	8 HOLES	
DEEP FOR #1 HEX. SOCKET HD. SCREW	8 HOLES	
ILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE)		LOCK-TITE AT FINAL ASS'Y
DOWEL PIN	8 HOLES	
ILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE)		LOCK-TITE AT FINAL ASS'Y
DOWEL PIN	4 HOLES	
PIECE TOTAL 10 HOLES		
PIECE TOTAL 8 HOLES		
PIECE TOTAL 8 HOLES		
DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE)		LOCK-TITE AT FINAL ASS'Y
DOWEL PIN 4 HOLES EA. PIECE TOTAL 8 HOLES		
DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE)		
DOWEL PIN 2 HOLES EA. PIECE TOTAL 4 HOLES		
DRILL #4-40 UNC	10 HOLES	USE #31 (.1200) AS TAP DRILL
DRILL #2-56 UNC	8 HOLES	USE #42 (.0935) AS TAP DRILL
TAP THRU	8 HOLES	
WITH P_1	8 HOLES	IDENTICAL WITH P_1
WITH R_1	4 HOLES	IDENTICAL WITH R_1

SHEET 2 OF 3

Figure 25(

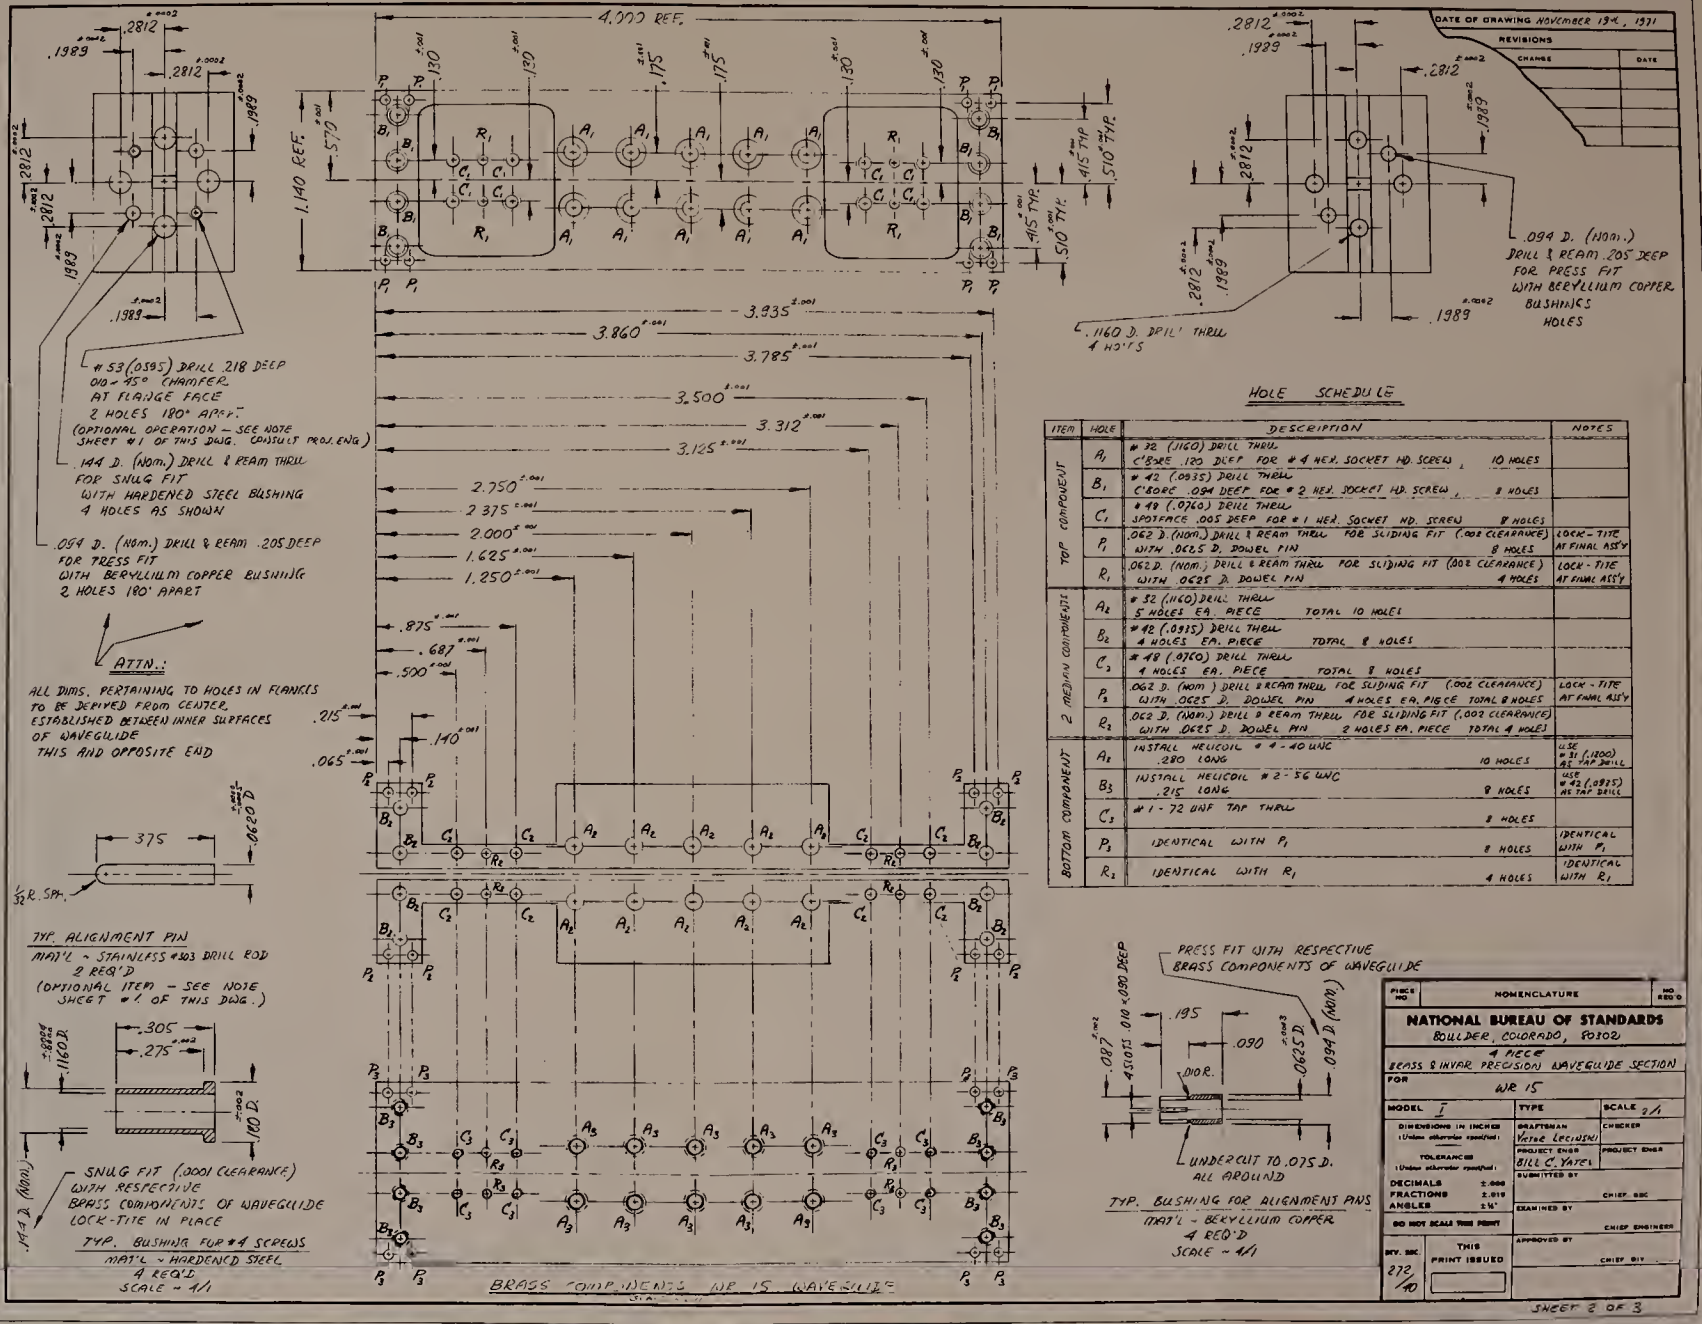
4.700 REF.
1.140 REF.
3.935
3.860
3.785
3.500
3.312
3.125
2.750
2.375
2.000
1.625
1.250
.875
.687
.500
.215
.140
.065
.130
.175
.415 TYP.
.510 TYP.
.2812
.1989
.1160 D. DRILL THRU 4 HOLES
.094 D. (NOM.) DRILL & REAM .205 DEEP FOR PRESS FIT WITH BERYLLIUM COPPER BUSHINGS HOLES
#53 (.0595) DRILL .218 DEEP .010 x 45° CHAMFER AT FLANGE FACE 2 HOLES 180° APART (OPTIONAL OPERATION — SEE NOTE SHEET #1 OF THIS DWG. CONSULT PROJ. ENG.)
.144 D. (NOM.) DRILL & REAM THRU FOR SNUG FIT WITH HARDENED STEEL BUSHING 4 HOLES AS SHOWN
.094 D. (NOM.) DRILL & REAM .205 DEEP FOR PRESS FIT WITH BERYLLIUM COPPER BUSHING 2 HOLES 180° APART
ATTN.:
ALL DIMS. PERTAINING TO HOLES IN FLANGES TO BE DERIVED FROM CENTER ESTABLISHED BETWEEN INNER SURFACES OF WAVEGUIDE THIS AND OPPOSITE END
.0620 D.
.375
1/32 R. SPH.
TYP. ALIGNMENT PIN
MAT'L - STAINLESS #303 DRILL ROD
2 REQ'D
(OPTIONAL ITEM — SEE NOTE SHEET #1 OF THIS DWG.)
.305
.275
.1160 D.
.100 D.
.144 D. (NOM.)
SNUG FIT (.0001 CLEARANCE) WITH RESPECTIVE BRASS COMPONENTS OF WAVEGUIDE LOCK-TITE IN PLACE
TYP. BUSHING FOR #4 SCREWS
MAT'L - HARDENED STEEL
4 REQ'D.
SCALE - 4/1
BRASS COMPONENTS WR 15 WAVEGUIDE
PRESS FIT WITH RESPECTIVE BRASS COMPONENTS OF WAVEGUIDE
.195
.090
.082
.010 x .090 DEEP
.0625 D.
.094 D. (NOM.)
DIOR.
UNDERCUT TO .075 D. ALL AROUND
TYP. BUSHING FOR ALIGNMENT PINS
MAT'L - BERYLLIUM COPPER
4 REQ'D
SCALE - 4/1

HOLE SCHEDULE

ITEM	HOLE	DESCRIPTION	NOTES
TOP COMPONENT	A_1	# 32 (.1160) DRILL THRU C'BORE .120 DEEP FOR # 4 HEX. SOCKET HD. SCREW — 10 HOLES	
	B_1	# 42 (.0935) DRILL THRU C'BORE .094 DEEP FOR # 2 HEX. SOCKET HD. SCREW — 8 HOLES	
	C_1	# 49 (.0760) DRILL THRU SPOTFACE .005 DEEP FOR # 1 HEX. SOCKET HD. SCREW — 8 HOLES	
	P_1	.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .0625 D. DOWEL PIN — 8 HOLES	LOCK-TITE AT FINAL ASS'Y
	R_1	.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .0625 D. DOWEL PIN — 4 HOLES	LOCK-TITE AT FINAL ASS'Y
2 MEDIAN COMPONENTS	A_2	# 32 (.1160) DRILL THRU 5 HOLES EA. PIECE TOTAL 10 HOLES	
	B_2	# 42 (.0935) DRILL THRU 4 HOLES EA. PIECE TOTAL 8 HOLES	
	C_2	# 49 (.0760) DRILL THRU 4 HOLES EA. PIECE TOTAL 8 HOLES	
	P_2	.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .0625 D. DOWEL PIN 4 HOLES EA. PIECE TOTAL 8 HOLES	LOCK-TITE AT FINAL ASS'Y
	R_2	.062 D. (NOM.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .0625 D. DOWEL PIN 2 HOLES EA. PIECE TOTAL 4 HOLES	
BOTTOM COMPONENT	A_3	INSTALL HELICOIL # 4 - 40 UNC .280 LONG — 10 HOLES	USE # 31 (.1200) AS TAP DRILL
	B_3	INSTALL HELICOIL # 2 - 56 UNC .215 LONG — 8 HOLES	USE # 42 (.0935) AS TAP DRILL
	C_3	# 1 - 72 UNF TAP THRU — 8 HOLES	
	P_3	IDENTICAL WITH P_1 — 8 HOLES	IDENTICAL WITH P_1
	R_3	IDENTICAL WITH R_1 — 4 HOLES	IDENTICAL WITH R_1

DATE OF DRAWING NOVEMBER 19-, 1971

REVISIONS

CHANGE	DATE

PIECE NO	NOMENCLATURE	NO REQ'D
	4 PIECE BRASS & INVAR PRECISION WAVEGUIDE SECTION FOR WR 15	

NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302

MODEL	TYPE	SCALE
I		2/1

DIMENSIONS IN INCHES (Unless otherwise specified)	DRAFTSMAN Yates (RC/JSH)	CHECKER
TOLERANCES (Unless otherwise specified)	PROJECT ENGR BILL C. YATES	PROJECT ENGR
DECIMALS ±.000	SUBMITTED BY	
FRACTIONS ±.015		CHIEF, SSC
ANGLES ±1°	EXAMINED BY	
DO NOT SCALE THIS PRINT		CHIEF ENGINEER
DIV. SSC 272/10	THIS PRINT ISSUED	APPROVED BY CHIEF DIV.

SHEET 2 OF 3

Figure 25(b).

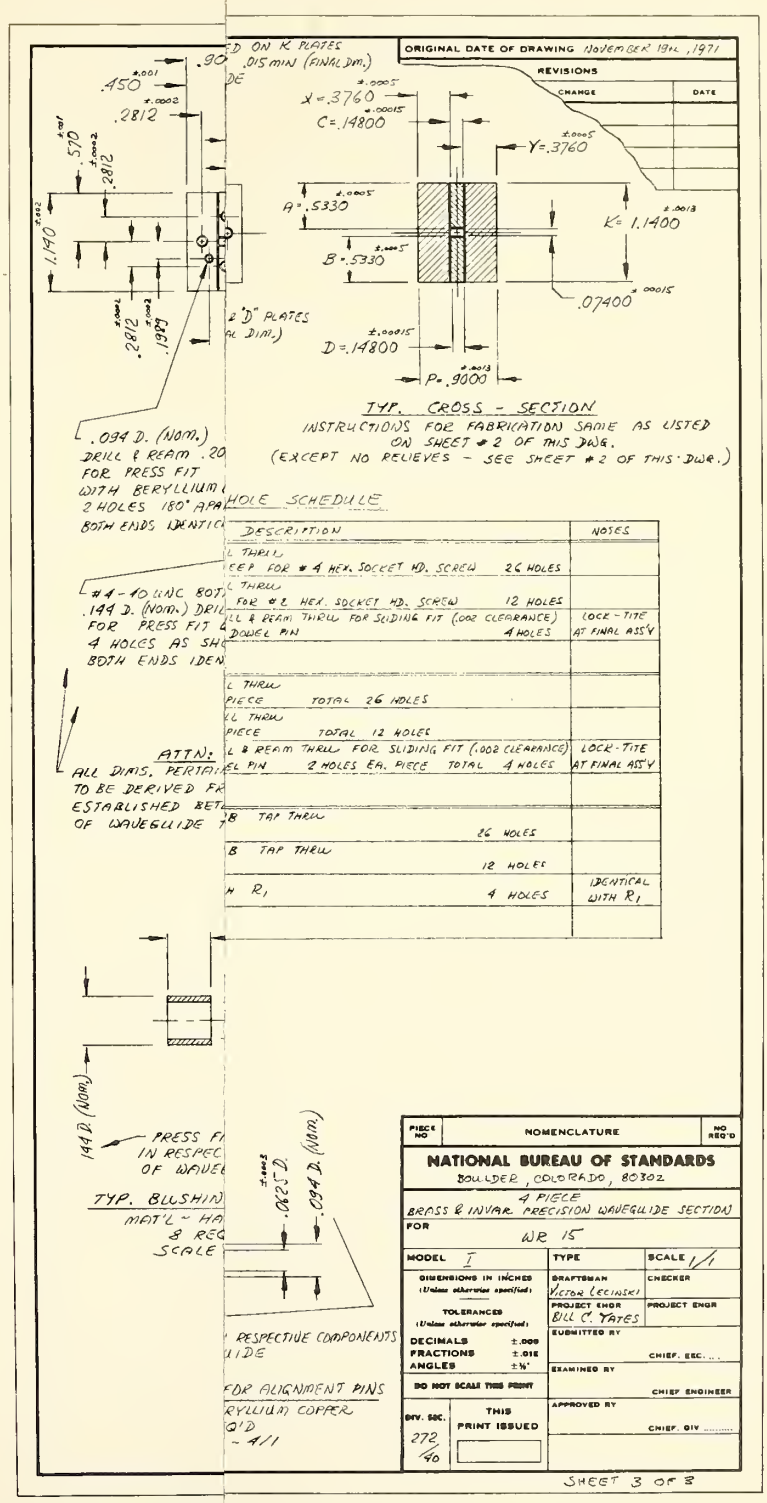
ORIGINAL DATE OF DRAWING NOVEMBER 19th, 1971
REVISIONS
CHANGE
DATE
.450 ±.001
.2812 ±.0002
.570 ±.001
.2812 ±.0002
1.140 ±.002
.2812 ±.0002
.187 ±.002
X = .3760 ±.0005
C = .14800 ±.00015
Y = .3760 ±.0005
A = .5330 ±.0005
B = .5330 ±.0005
K = 1.1400 ±.0013
.07400 ±.00015
D = .14800 ±.00015
P = .9000 ±.0013
TYP. CROSS - SECTION
INSTRUCTIONS FOR FABRICATION SAME AS LISTED ON SHEET #2 OF THIS DWG. (EXCEPT NO RELIEVES - SEE SHEET #2 OF THIS DWG.)
.094 D. (NOM.)
DRILL & REAM .20
FOR PRESS FIT
WITH BERYLLIUM
2 HOLES 180° APA
BOTH ENDS IDENTIC
#4-40 UNC BOT
.144 D. (NOM.) DRIL
FOR PRESS FIT
4 HOLES AS SH
BOTH ENDS IDEN
ATTN:
ALL DIMS. PERTAI
TO BE DERIVED FR
ESTABLISHED BET
OF WAVEGUIDE
HOLE SCHEDULE
DESCRIPTION
NOTES
THRU, FOR #4 HEX. SOCKET HD. SCREW 26 HOLES
THRU FOR #2 HEX. SOCKET HD. SCREW 12 HOLES
& REAM THRU FOR SLIDING FIT (.002 CLEARANCE) (LOCK-TITE AT FINAL ASS'Y
DOWEL PIN 4 HOLES
THRU PIECE TOTAL 26 HOLES
THRU PIECE TOTAL 12 HOLES
& REAM THRU FOR SLIDING FIT (.002 CLEARANCE) LOCK-TITE
PIN 2 HOLES EA. PIECE TOTAL 4 HOLES AT FINAL ASS'Y
TAP THRU 26 HOLES
TAP THRU 12 HOLES
R1 4 HOLES IDENTICAL WITH R1
.144 D. (NOM.)
PRESS FI
IN RESPEC
OF WAVE
TYP. BUSHIN
MAT'L ~ HA
& REQ
SCALE
.094 D. (NOM.)
.2812 ±.0002 D
RESPECTIVE COMPONENTS
UIDE
FOR ALIGNMENT PINS
RYLLIUM COPPER
O'D
~ A/1
PIECE NO
NOMENCLATURE
NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
4 PIECE
BRASS & INVAR PRECISION WAVEGUIDE SECTION
FOR
WR 15
MODEL I
TYPE
SCALE 1/1
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.005
FRACTIONS ±.015
ANGLES ±½°
DO NOT SCALE THIS PRINT
DRAFTSMAN Victor (ECINIK)
CHECKER
PROJECT ENGR Bill C. Yates
PROJECT ENGR
SUBMITTED BY
CHIEF, EEC. ...
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF, DIV .....
DIV. SEC. 272 40
THIS PRINT ISSUED
SHEET 3 OF 8

Figure 25

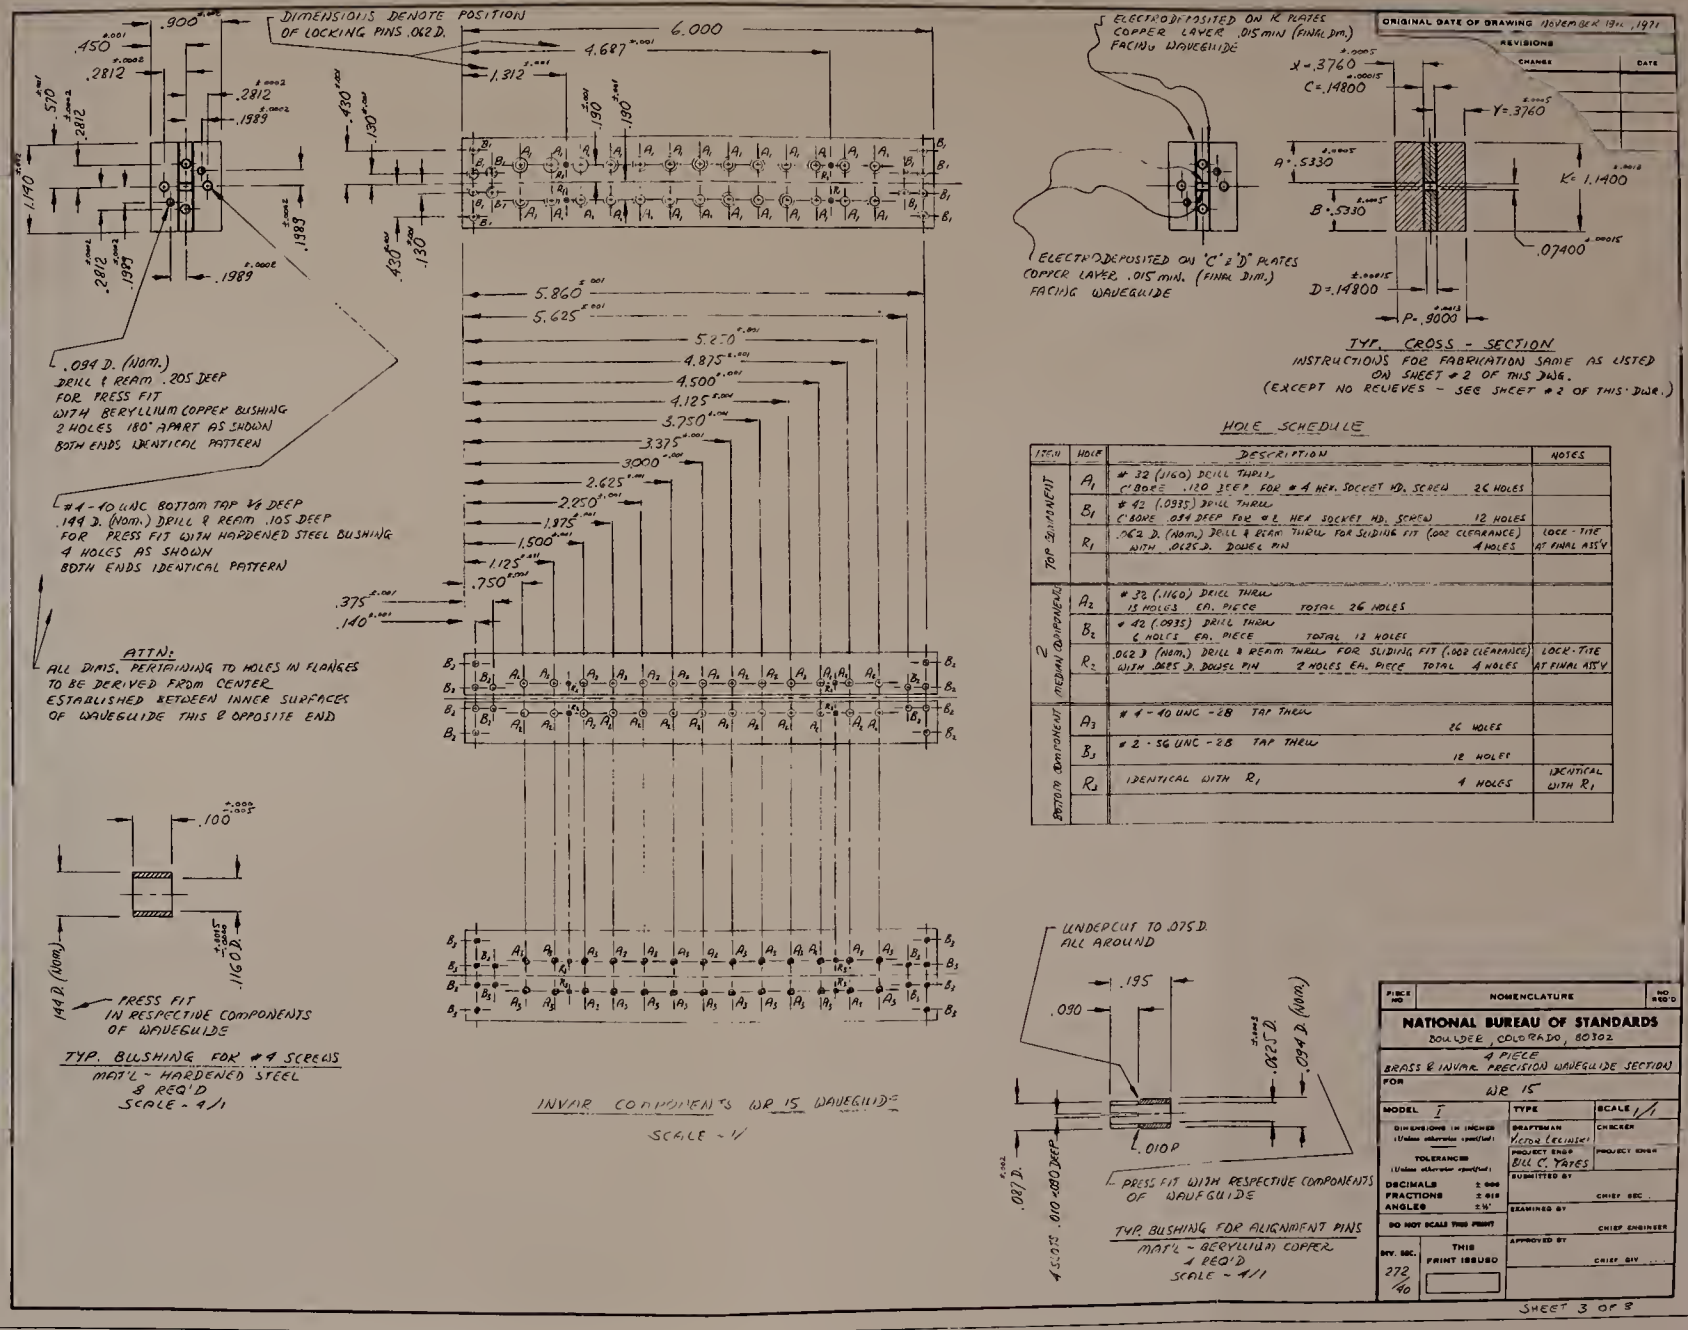
DIMENSIONS DENOTE POSITION OF LOCKING PINS .062 D.
.094 D. (Nom.) DRILL & REAM .205 DEEP FOR PRESS FIT WITH BERYLLIUM COPPER BUSHING 2 HOLES 180° APART AS SHOWN BOTH ENDS IDENTICAL PATTERN
#4-40 UNC BOTTOM TAP ⅛ DEEP .199 D. (Nom.) DRILL & REAM .105 DEEP FOR PRESS FIT WITH HARDENED STEEL BUSHING 4 HOLES AS SHOWN BOTH ENDS IDENTICAL PATTERN
ATTN: ALL DIMS. PERTAINING TO HOLES IN FLANGES TO BE DERIVED FROM CENTER ESTABLISHED BETWEEN INNER SURFACES OF WAVEGUIDE THIS & OPPOSITE END
PRESS FIT IN RESPECTIVE COMPONENTS OF WAVEGUIDE
TYP. BUSHING FOR #4 SCREWS
MAT'L - HARDENED STEEL
8 REQ'D
SCALE - 4/1
INVAR COMPONENTS WR 15 WAVEGUIDE
SCALE - 1/1
ELECTRODEPOSITED ON 'A' PLATES COPPER LAYER .015 MIN (FINAL DIM.) FACING WAVEGUIDE
ELECTRODEPOSITED ON 'C' & 'D' PLATES COPPER LAYER .015 MIN. (FINAL DIM.) FACING WAVEGUIDE
TYP. CROSS - SECTION
INSTRUCTIONS FOR FABRICATION SAME AS LISTED ON SHEET #2 OF THIS DWG.
(EXCEPT NO RELIEVES - SEE SHEET #2 OF THIS DWG.)
UNDERCUT TO .075 D ALL AROUND
4 SLOTS .010 ±.002 DEEP
PRESS FIT WITH RESPECTIVE COMPONENTS OF WAVEGUIDE
TYP. BUSHING FOR ALIGNMENT PINS
MAT'L - BERYLLIUM COPPER
4 REQ'D
SCALE - 4/1

HOLE SCHEDULE

ITEM	HOLE	DESCRIPTION	NOTES
TOP COMPONENT	A_1	#32 (.1160) DRILL THRU, C'BORE .120 DEEP FOR #4 HEX. SOCKET HD. SCREW — 26 HOLES	
	B_1	#42 (.0935) DRILL THRU, C'BORE .094 DEEP FOR #2 HEX SOCKET HD. SCREW — 12 HOLES	
	R_1	.062 D. (Nom.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .062 D. DOWEL PIN — 4 HOLES	LOCK-TITE AT FINAL ASS'Y
2 MEDIAL COMPONENTS	A_2	#32 (.1160) DRILL THRU, 13 HOLES EA. PIECE — TOTAL 26 HOLES	
	B_2	#42 (.0935) DRILL THRU, 6 HOLES EA. PIECE — TOTAL 12 HOLES	
	R_2	.062 D (Nom.) DRILL & REAM THRU FOR SLIDING FIT (.002 CLEARANCE) WITH .062 D. DOWEL PIN — 2 HOLES EA. PIECE TOTAL 4 HOLES	LOCK-TITE AT FINAL ASS'Y
BOTTOM COMPONENT	A_3	#4-40 UNC-2B TAP THRU — 26 HOLES	
	B_3	#2-56 UNC-2B TAP THRU — 12 HOLES	
	R_3	IDENTICAL WITH R_1 — 4 HOLES	IDENTICAL WITH R_1

ORIGINAL DATE OF DRAWING NOVEMBER 19th, 1971

REVISIONS

CHANGE	DATE

NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302

4 PIECE BRASS & INVAR PRECISION WAVEGUIDE SECTION FOR WR 15

MODEL I | TYPE | SCALE 1/1

DRAFTSMAN: Victor Leciejewski | CHECKED

PROJECT ENGR: Bill C. Yates | PROJECT ENGR

SUBMITTED BY | CHIEF SEC.

EXAMINED BY | CHIEF ENGINEER

APPROVED BY | CHIEF DIV.

DIV. SEC. 272.40 | THIS PRINT ISSUED

SHEET 3 OF 8

Figure 25(c).

APPENDIX H

Machine drawing for quarter-wave short circuit for WR15 waveguide.

Figure 26

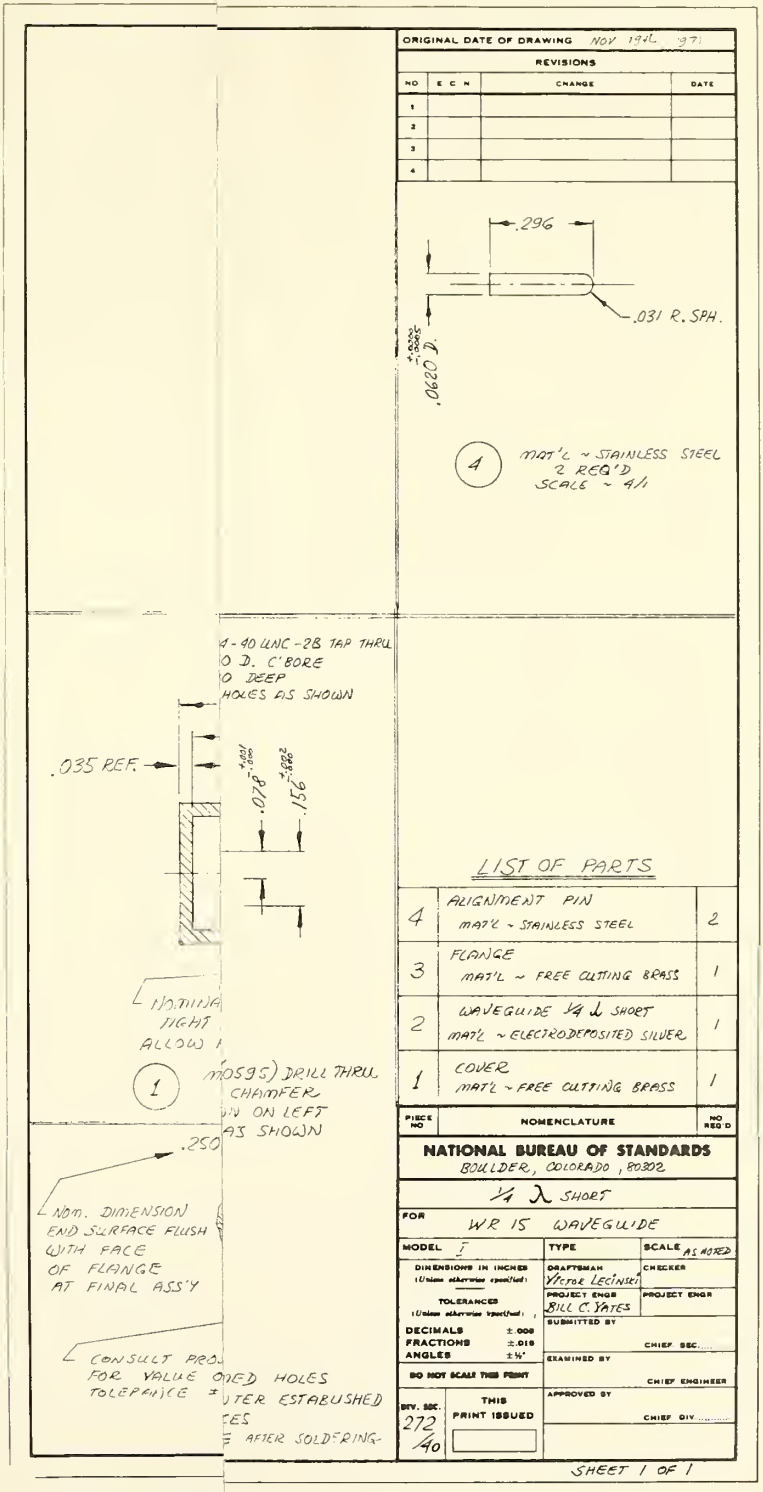
ORIGINAL DATE OF DRAWING NOV 1962
REVISIONS
NO | E C N | CHANGE | DATE
.296
.031 R. SPH.
.0620 D.
4
MAT'L ~ STAINLESS STEEL
2 REQ'D
SCALE ~ 4/1
4-40 UNC-2B TAP THRU
D. C'BORE
DEEP
HOLES AS SHOWN
.035 REF.
.078
.156
NOMINAL
LIGHT
ALLOW
1
(.0595) DRILL THRU
CHAMFER
ON LEFT
AS SHOWN
.250
NOM. DIMENSION
END SURFACE FLUSH
WITH FACE
OF FLANGE
AT FINAL ASS'Y
CONSULT PRO
FOR VALUE
TOLERANCE
HOLES
ESTABLISHED
AFTER SOLDERING
LIST OF PARTS
4 ALIGNMENT PIN
MAT'L ~ STAINLESS STEEL 2
3 FLANGE
MAT'L ~ FREE CUTTING BRASS 1
2 WAVEGUIDE ¼ λ SHORT
MAT'L ~ ELECTRODEPOSITED SILVER 1
1 COVER
MAT'L ~ FREE CUTTING BRASS 1
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
¼ λ SHORT
FOR WR 15 WAVEGUIDE
MODEL 1 | TYPE | SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.005
FRACTIONS ±.015
ANGLES ±½°
DO NOT SCALE THIS PRINT
DRAFTSMAN Victor Leciner | CHECKED
PROJECT ENGR Bill C. Yates | PROJECT ENGR
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DEV. SEC. 272/40
THIS PRINT ISSUED
SHEET 1 OF 1

Figure 26.

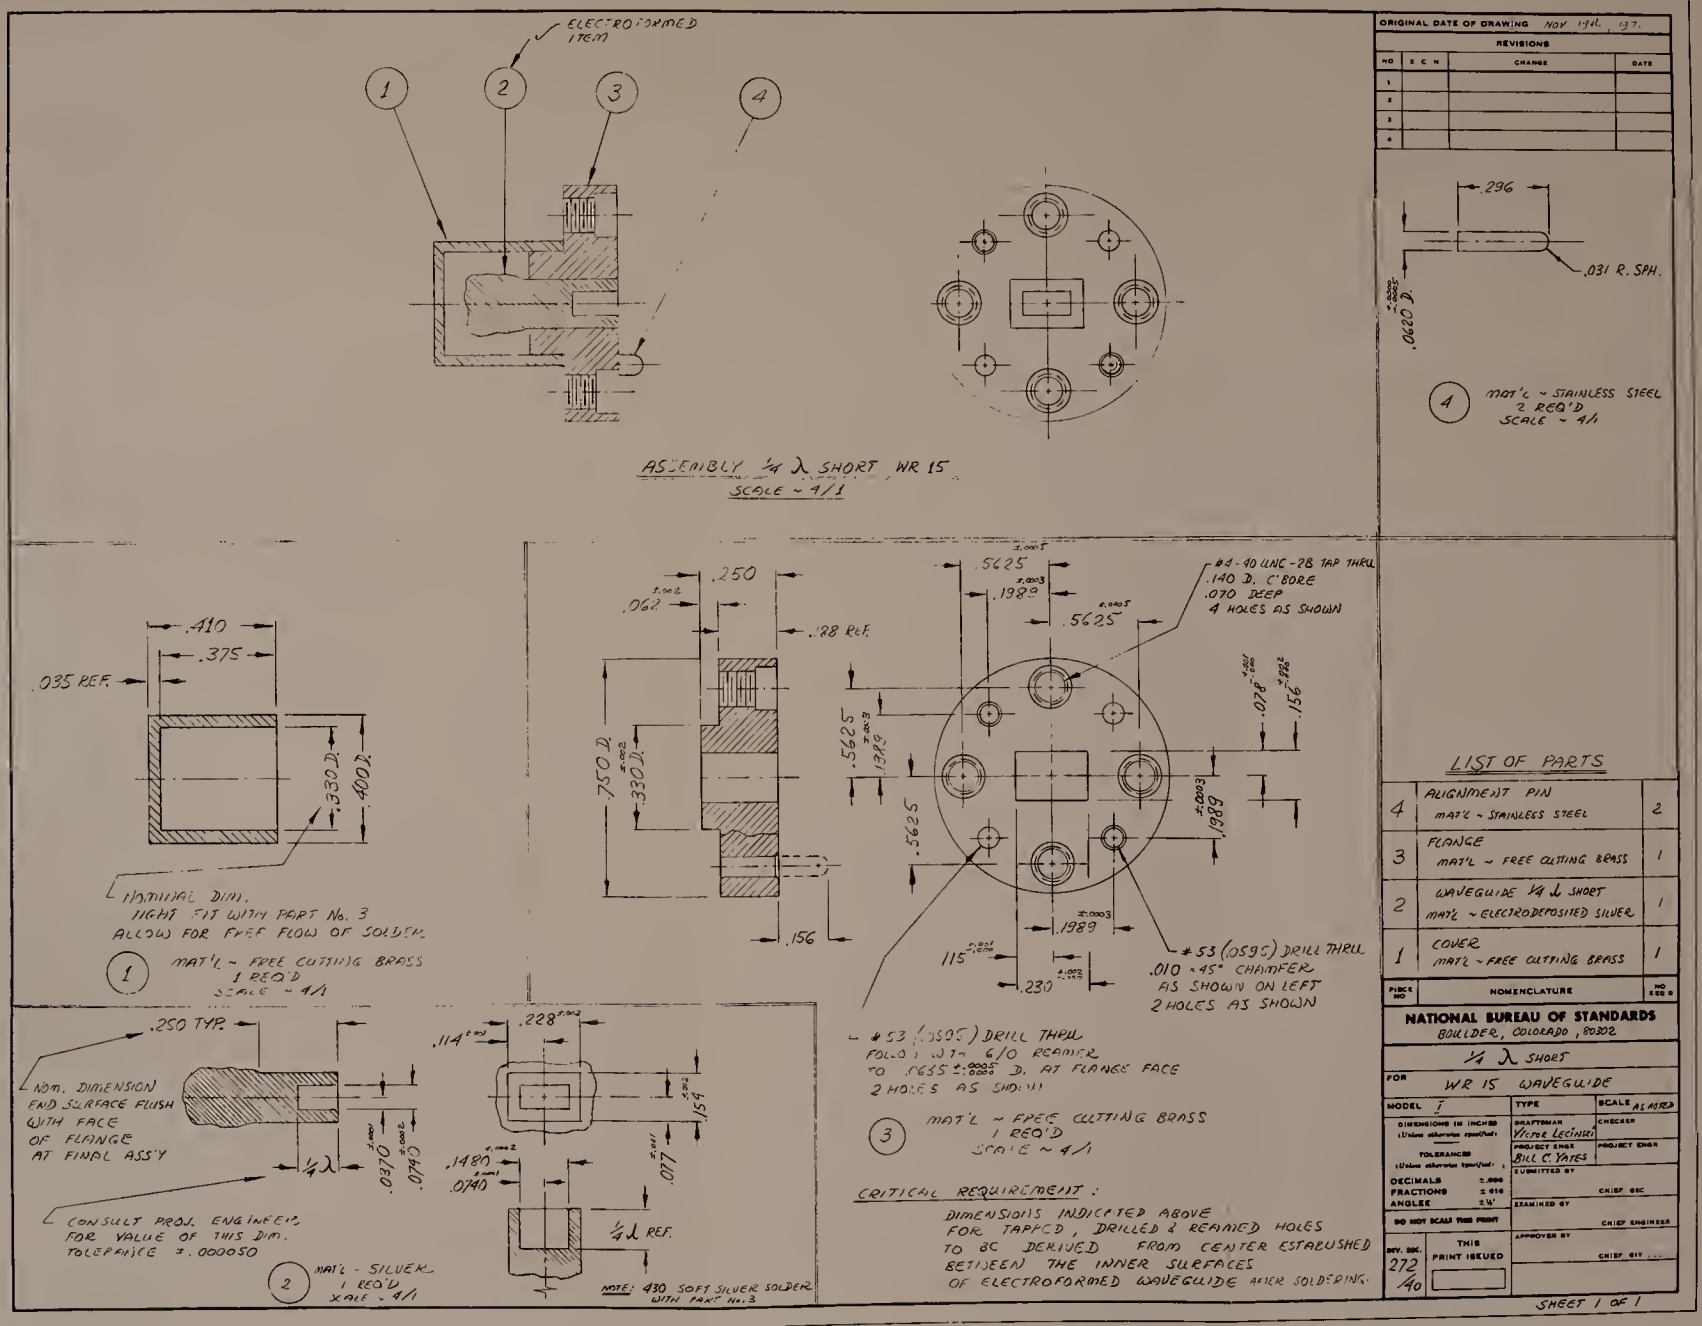
ELECTROFORMED ITEM
1
2
3
4
ASSEMBLY 1/4 λ SHORT WR 15
SCALE ~ 4/1
ORIGINAL DATE OF DRAWING NOV 19th, '67.
REVISIONS
NO | E C N | CHANGE | DATE
.296
.031 R. SPH.
.090 D.
4 MAT'L ~ STAINLESS STEEL 2 REQ'D SCALE ~ 4/1
.410
.375
.035 REF.
.330 D.
.400 D.
NOMINAL DIM. LIGHT FIT WITH PART No. 3 ALLOW FOR FREE FLOW OF SOLDER.
1 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 4/1
.250
.062
.188 REF.
.750 D.
.330 D.
.156
.5625
.1989
.5625
#4-40 UNC-2B TAP THRU
.140 D. C'BORE
.070 DEEP
4 HOLES AS SHOWN
.078
.156
.5625
.1379
.5625
.1989
.1989
.115
.230
#53 (.0595) DRILL THRU
.010 x 45° CHAMFER
AS SHOWN ON LEFT
2 HOLES AS SHOWN
.250 TYP.
NOM. DIMENSION END SURFACE FLUSH WITH FACE OF FLANGE AT FINAL ASS'Y
1/4 λ
.0370
.0740
CONSULT PROJ. ENGINEER FOR VALUE OF THIS DIM. TOLERANCE ±.000050
2 MAT'L ~ SILVER 1 REQ'D XALE ~ 4/1
.228
.114
.154
.1480
.0740
.077
1/4 λ REF.
NOTE: 430 SOFT SILVER SOLDER WITH PART No. 3
#53 (.0595) DRILL THRU
FOLLOW WITH 6/0 REAMER
TO .1635 D. AT FLANGE FACE
2 HOLES AS SHOWN
3 MAT'L ~ FREE CUTTING BRASS 1 REQ'D SCALE ~ 4/1
CRITICAL REQUIREMENT:
DIMENSIONS INDICATED ABOVE FOR TAPPED, DRILLED & REAMED HOLES TO BE DERIVED FROM CENTER ESTABLISHED BETWEEN THE INNER SURFACES OF ELECTROFORMED WAVEGUIDE AFTER SOLDERING.
LIST OF PARTS
PIECE NO | NOMENCLATURE | NO REQ'D
4 | ALIGNMENT PIN MAT'L ~ STAINLESS STEEL | 2
3 | FLANGE MAT'L ~ FREE CUTTING BRASS | 1
2 | WAVEGUIDE 1/4 λ SHORT MAT'L ~ ELECTRODEPOSITED SILVER | 1
1 | COVER MAT'L ~ FREE CUTTING BRASS | 1
NATIONAL BUREAU OF STANDARDS
BOULDER, COLORADO, 80302
1/4 λ SHORT
FOR WR 15 WAVEGUIDE
MODEL 1 | TYPE | SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ±.005
FRACTIONS ± 1/16
ANGLES ±1°
DO NOT SCALE THIS PRINT
DRAFTSMAN Victor Lecinski
CHECKER
PROJECT ENGR Bill C. Yates
PROJECT ENGR
SUBMITTED BY
CHIEF SEC
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV
DIV. SEC. 272 / 40
THIS PRINT ISSUED
SHEET 1 OF 1

Figure 26.

APPENDIX I

Machine drawing for circular waveguide below-cutoff attenuator for nominal 30 MHz operation.

Figures 27(a) thru 27(n)

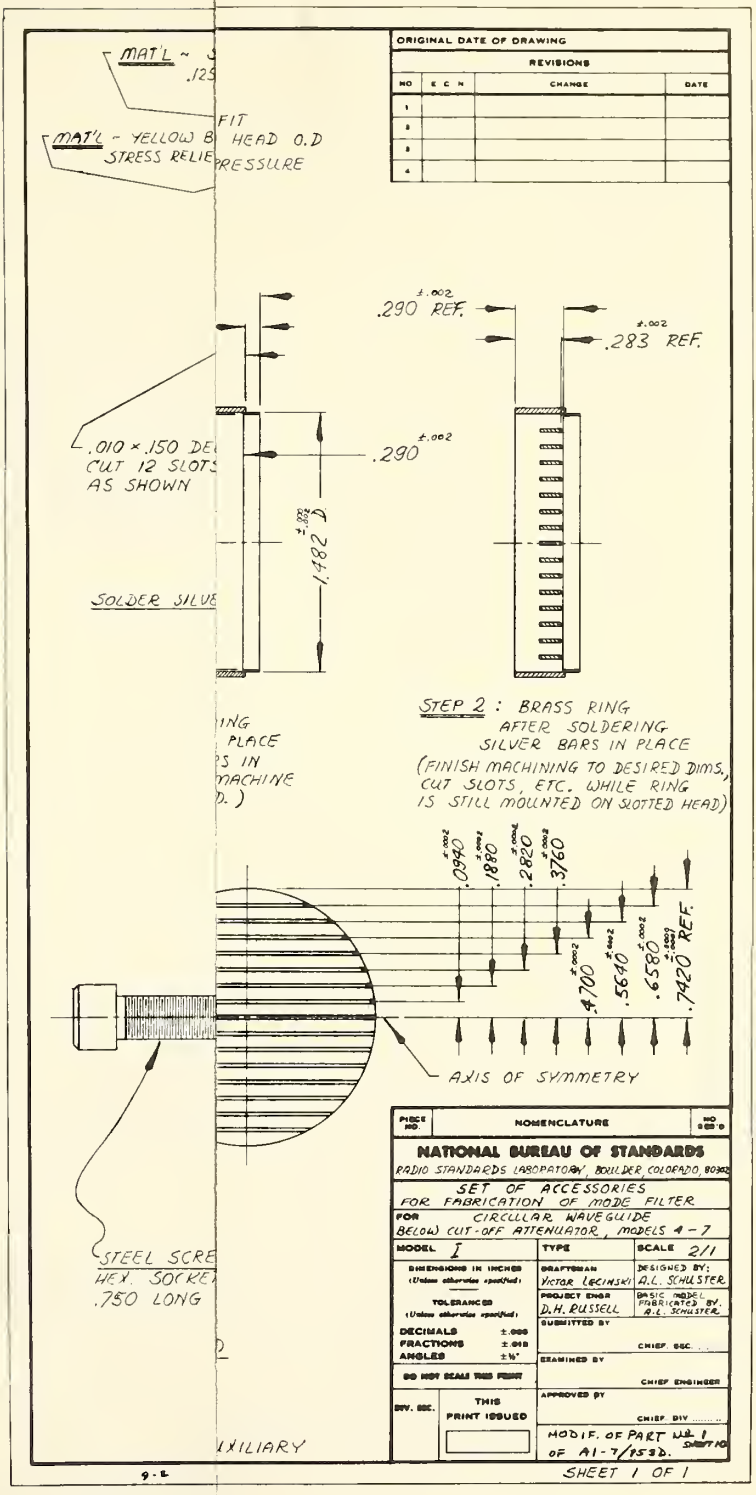
ORIGINAL DATE OF DRAWING
REVISIONS
NO | E C N | CHANGE | DATE
MAT'L ~
.125
FIT
MAT'L - YELLOW B
HEAD O.D
STRESS RELIE
PRESSURE
.290 REF.
.283 REF.
.010 × .150 DE
CUT 12 SLOTS
AS SHOWN
.290
1.282
SOLDER SILVE
STEP 2 : BRASS RING
AFTER SOLDERING
SILVER BARS IN PLACE
(FINISH MACHINING TO DESIRED DIMS.,
CUT SLOTS, ETC. WHILE RING
IS STILL MOUNTED ON SLOTTED HEAD)
.0940
.1880
.2820
.3760
.4700
.5640
.6580
.7420 REF.
AXIS OF SYMMETRY
STEEL SCRE
HEX. SOCKE
.750 LONG
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER COLORADO, 80302
SET OF ACCESSORIES
FOR FABRICATION OF MODE FILTER
FOR CIRCULAR WAVEGUIDE
BELOW) CUT-OFF ATTENUATOR, MODELS 4 - 7
MODEL I
TYPE
SCALE 2/1
DRAFTSMAN Victor Lecinski
DESIGNED BY: A.L. SCHLUSTER
PROJECT ENGR D.H. RUSSELL
BASIC MODEL FABRICATED BY: A.L. SCHLUSTER
SUBMITTED BY
CHIEF, SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF, DIV.
DIV. SEC.
THIS PRINT ISSUED
MODIF. OF PART NO. 1 OF A1-7/1532.
SHEET 1 OF 1

Figure 27

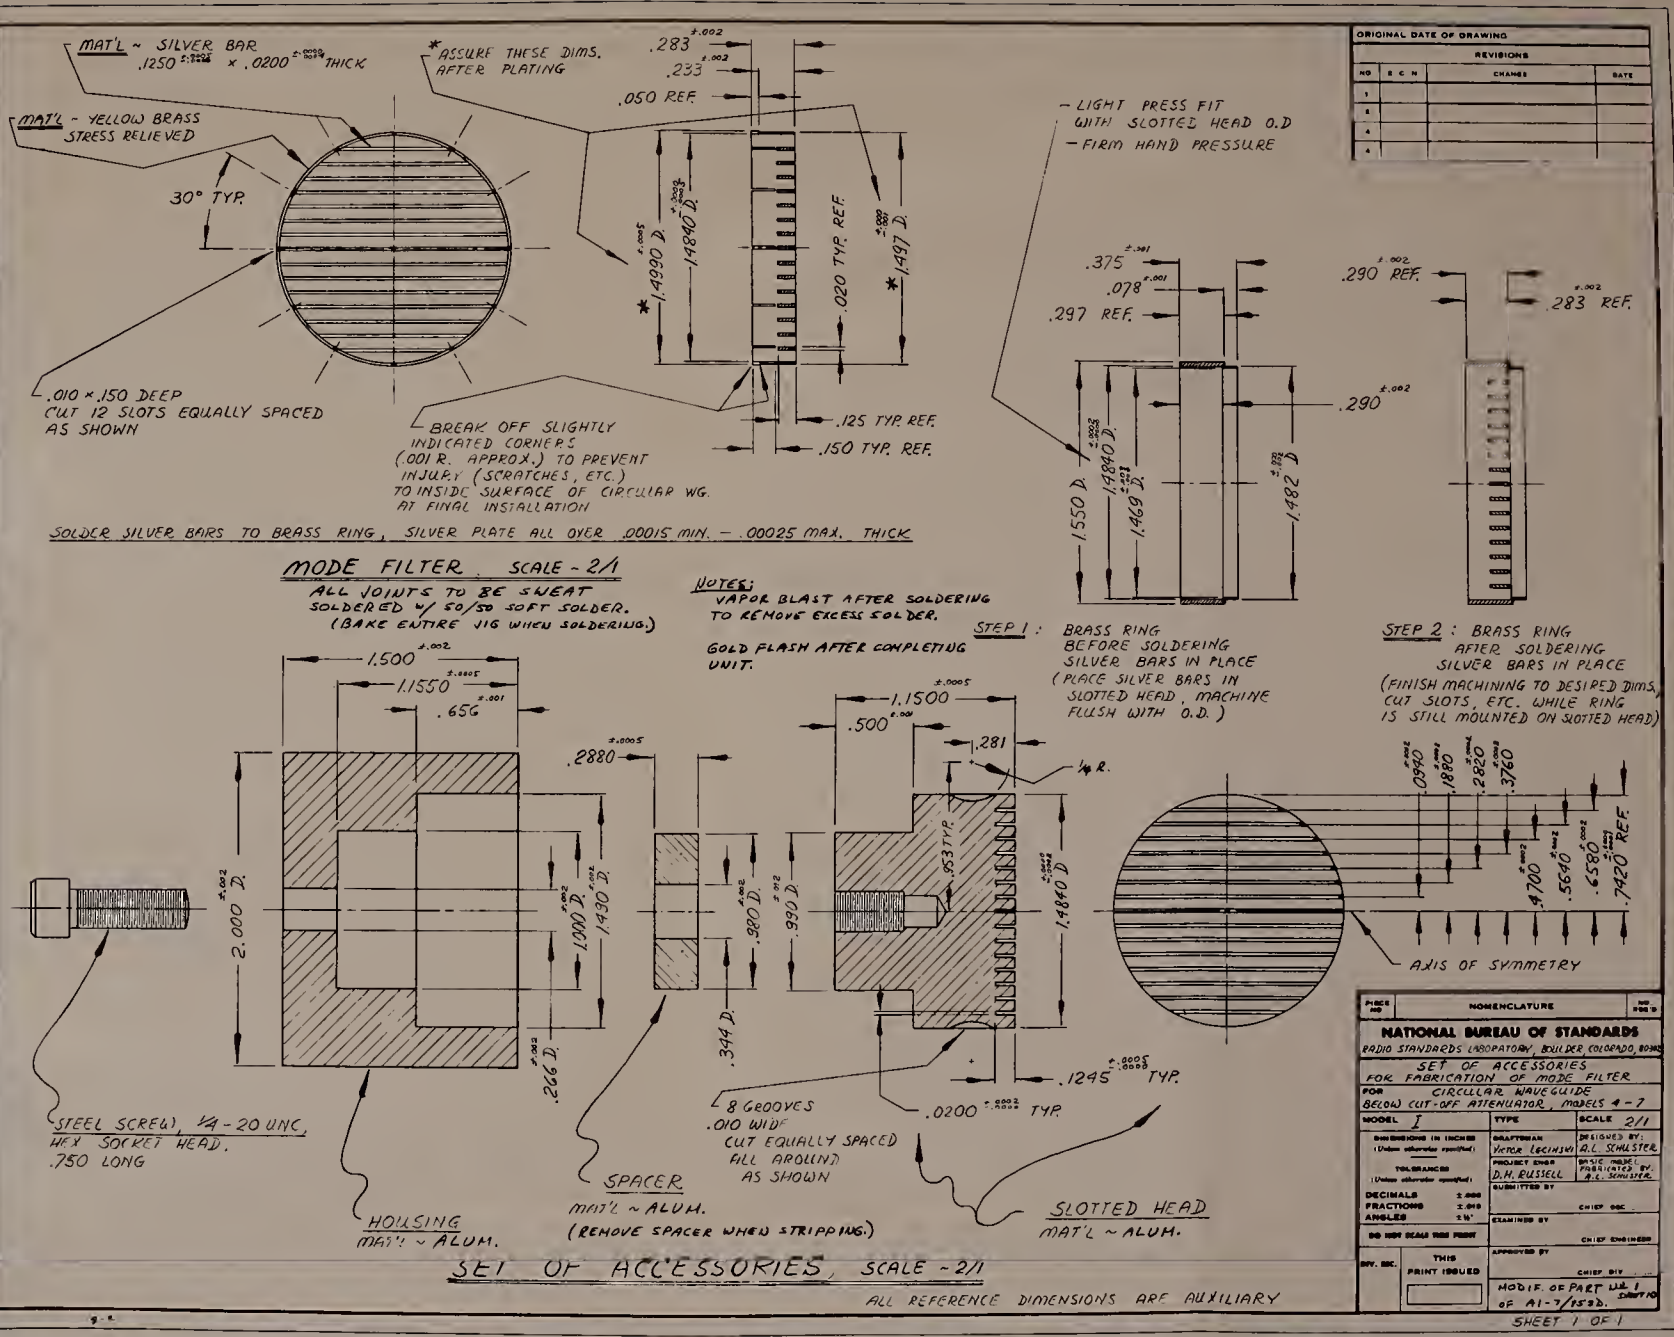
MAT'L ~ SILVER BAR .1250 ±.0004 x .0200 ±.0004 THICK
MAT'L ~ YELLOW BRASS STRESS RELIEVED
30° TYP.
.010 x .150 DEEP CUT 12 SLOTS EQUALLY SPACED AS SHOWN
* ASSURE THESE DIMS. AFTER PLATING
.283 ±.002
.233 ±.002
.050 REF.
.020 TYP. REF.
.125 TYP. REF.
.150 TYP. REF.
BREAK OFF SLIGHTLY INDICATED CORNERS (.001 R. APPROX.) TO PREVENT INJURY (SCRATCHES, ETC.) TO INSIDE SURFACE OF CIRCULAR WG. AT FINAL INSTALLATION
SOLDER SILVER BARS TO BRASS RING, SILVER PLATE ALL OVER .00015 MIN. - .00025 MAX. THICK
- LIGHT PRESS FIT WITH SLOTTED HEAD O.D
- FIRM HAND PRESSURE
.375 ±.001
.078 ±.001
.297 REF.
.290 ±.002
.290 REF.
.283 REF.
STEP 1 : BRASS RING BEFORE SOLDERING SILVER BARS IN PLACE (PLACE SILVER BARS IN SLOTTED HEAD, MACHINE FLUSH WITH O.D.)
STEP 2 : BRASS RING AFTER SOLDERING SILVER BARS IN PLACE (FINISH MACHINING TO DESIRED DIMS, CUT SLOTS, ETC. WHILE RING IS STILL MOUNTED ON SLOTTED HEAD)
MODE FILTER, SCALE ~ 2/1
ALL JOINTS TO BE SWEAT SOLDERED W/ 50/50 SOFT SOLDER. (BAKE ENTIRE JIG WHEN SOLDERING.)
NOTES: VAPOR BLAST AFTER SOLDERING TO REMOVE EXCESS SOLDER.
GOLD FLASH AFTER COMPLETING UNIT.
1.500 ±.002
1.1550 ±.0005
.656 ±.001
.2880 ±.0005
2.000 ±.002
1.000 ±.002
1.430 ±.002
.266 ±.002
.980 ±.002
.990 ±.002
.344
1.1500 ±.0005
.500 ±.001
.281
¼ R.
.953 TYP.
1.4840 ±.0005
.1245 +.0005 -.0003 TYP.
.0200 +.0003 -.0004 TYP.
.0940 ±.002
.1880 ±.002
.2820 ±.002
.3760 ±.002
.4700 ±.002
.5640 ±.002
.6580 ±.002
.7420 REF.
AXIS OF SYMMETRY
STEEL SCREW, ¼-20 UNC, HEX SOCKET HEAD, .750 LONG
HOUSING MAT'L ~ ALUM.
SPACER MAT'L ~ ALUM. (REMOVE SPACER WHEN STRIPPING.)
8 GROOVES .010 WIDE CUT EQUALLY SPACED ALL AROUND AS SHOWN
SLOTTED HEAD MAT'L ~ ALUM.
SET OF ACCESSORIES, SCALE ~ 2/1
ALL REFERENCE DIMENSIONS ARE AUXILIARY
ORIGINAL DATE OF DRAWING
REVISIONS
NO | E C N | CHANGES | DATE
NOMENCLATURE
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, U.S.A.
SET OF ACCESSORIES FOR FABRICATION OF MODE FILTER FOR CIRCULAR WAVEGUIDE BELOW CUT-OFF ATTENUATOR, MODELS 4 - 7
MODEL I
TYPE
SCALE 2/1
DRAFTSMAN: Victor Lecinski
DESIGNED BY: A.L. SCHLISTER
PROJECT ENGR: D.H. RUSSELL
BASIC MODEL FABRICATED BY: A.L. SCHLISTER
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± 1/64
ANGLES ± ½°
DO NOT SCALE THIS PRINT
DEV. NO.
THIS PRINT ISSUED
MODIF. OF PART NO. 1 SHEET NO. OF A1-7/1532.
SHEET 1 OF 1

Figure 27(a).

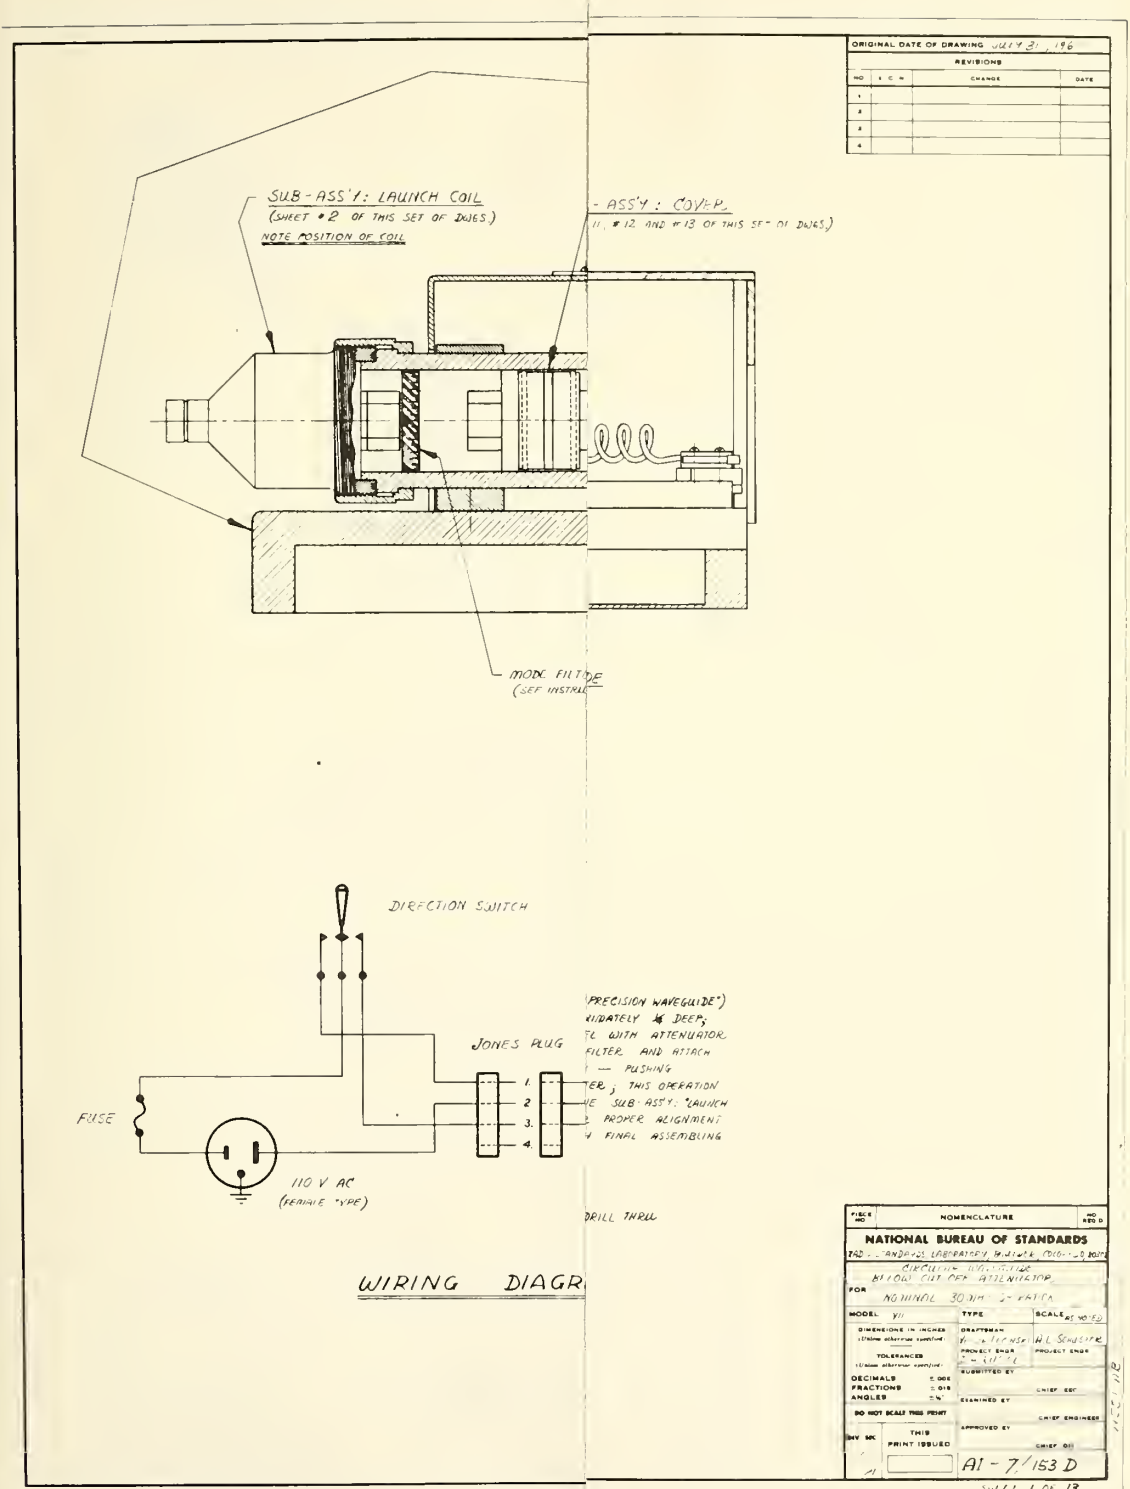
ORIGINAL DATE OF DRAWING JULY 31, 196
REVISIONS
NO
CHANGE
DATE
SUB-ASS'Y: LAUNCH COIL
(SHEET #2 OF THIS SET OF DWGS.)
NOTE POSITION OF COIL
- ASS'Y : COVER
11, #12 AND #13 OF THIS SET OF DWGS.)
MODE FILTER
(SEE INSTRU
DIRECTION SWITCH
JONES PLUG
1.
2
3.
4.
FUSE
110 V AC
(FEMALE TYPE)
PRECISION WAVEGUIDE")
FILTER AND ATTACH
PUSHING
THIS OPERATION
SUB-ASS'Y: "LAUNCH
PROPER ALIGNMENT
FINAL ASSEMBLING
DRILL THRU
WIRING DIAGR
NOMENCLATURE
NATIONAL BUREAU OF STANDARDS
NOMINAL 30 DB 2-WAY
MODEL VII
TYPE
SCALE AS NOTED
DRAFTSMAN
H.L. SCHLOEPKE
PROJECT ENGR
SUBMITTED BY
CHIEF ENG
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV
THIS PRINT ISSUED
A1 - 7153 D
SHT 1 OF 13

Figure 27(b).

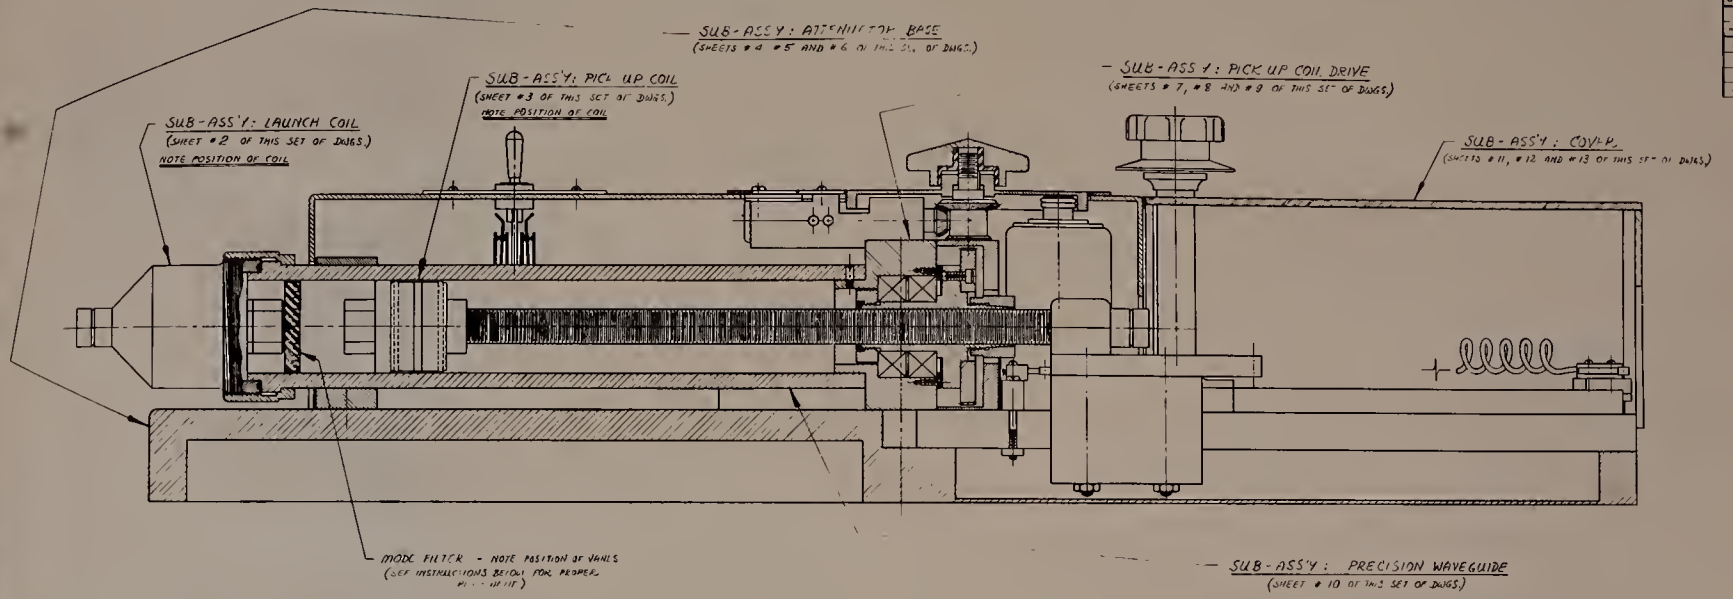
SUB-ASS'Y: ATTENUATOR BASE
(SHEETS # 4 #5 AND #6 OF THIS SET OF DWGS.)
SUB-ASS'Y: PICK UP COIL
(SHEET #3 OF THIS SET OF DWGS.)
NOTE POSITION OF COIL
SUB-ASS'Y: PICK UP COIL DRIVE
(SHEETS # 7, #8 AND #9 OF THIS SET OF DWGS.)
SUB-ASS'Y: LAUNCH COIL
(SHEET #2 OF THIS SET OF DWGS.)
NOTE POSITION OF COIL
SUB-ASS'Y: COUPLER
(SHEETS #11, #12 AND #13 OF THIS SET OF DWGS.)
MODE FILTER - NOTE POSITION OF VANES
(SEE INSTRUCTIONS BELOW FOR PROPER
PLACEMENT)
SUB-ASS'Y: PRECISION WAVEGUIDE
(SHEET # 10 OF THIS SET OF DWGS.)

ASSEMBLY

SCALE - 1/1

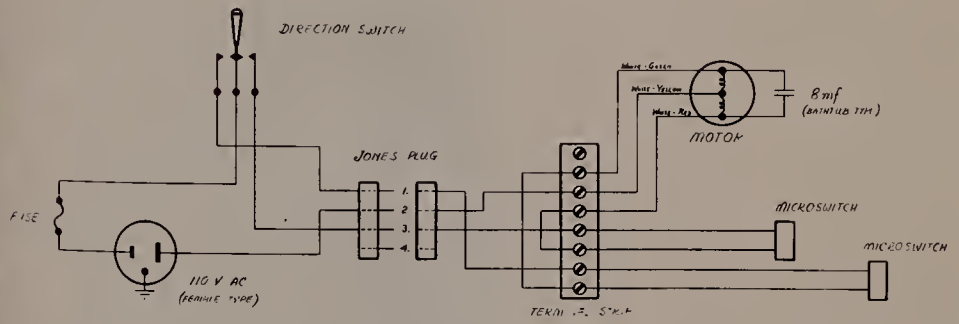

WIRING DIAGRAM

INSTRUCTIONS FOR PLACEMENT OF MODE FILTER

INTRODUCE MODE FILTER (PART No. 1 OF SUB-ASS'Y. "PRECISION WAVEGUIDE") INTO WAVEGUIDE (PART No. 7 OF SAME SUB-ASS'Y) APPROXIMATELY ¼ DEEP; VISUALLY ALIGN SCRIBE LINE ON MODE FILTER PARALLEL WITH ATTENUATOR BASE; PLACE SPACER SHOWN BELOW IN FRONT OF MODE FILTER AND ATTACH COMPLETED SUB-ASS'Y: "LAUNCH COIL" IN PROPER POSITION — PUSHING AT THE SAME TIME SHOWN BELOW SPACER AND MODE FILTER, THIS OPERATION WILL PLACE MODE FILTER IN ITS FINAL LOCATION; REMOVE SUB ASS'Y. "LAUNCH COIL", REMOVE SHOWN BELOW SPACER, CHECK AGAIN FOR PROPER ALIGNMENT OF SCRIBE LINE ON MODE FILTER, THEN PROCEED WITH FINAL ASSEMBLING OF ABOVE SHOWN ATTENUATOR.

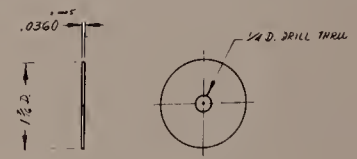

MODE FILTER SPACER

ORIGINAL DATE OF DRAWING JULY 3, 1961

REVISIONS

NO	E C N	CHANGE	DATE
1			
2			
3			
4			

NATIONAL BUREAU OF STANDARDS

NOMENCLATURE

DRAFTSMAN

PROJECT ENGR

SUBMITTED BY

CHIEF ENGINEER

APPROVED BY

CHIEF

A1 - 7/153 D

SHEET 1 OF 13

Figure 27(b).

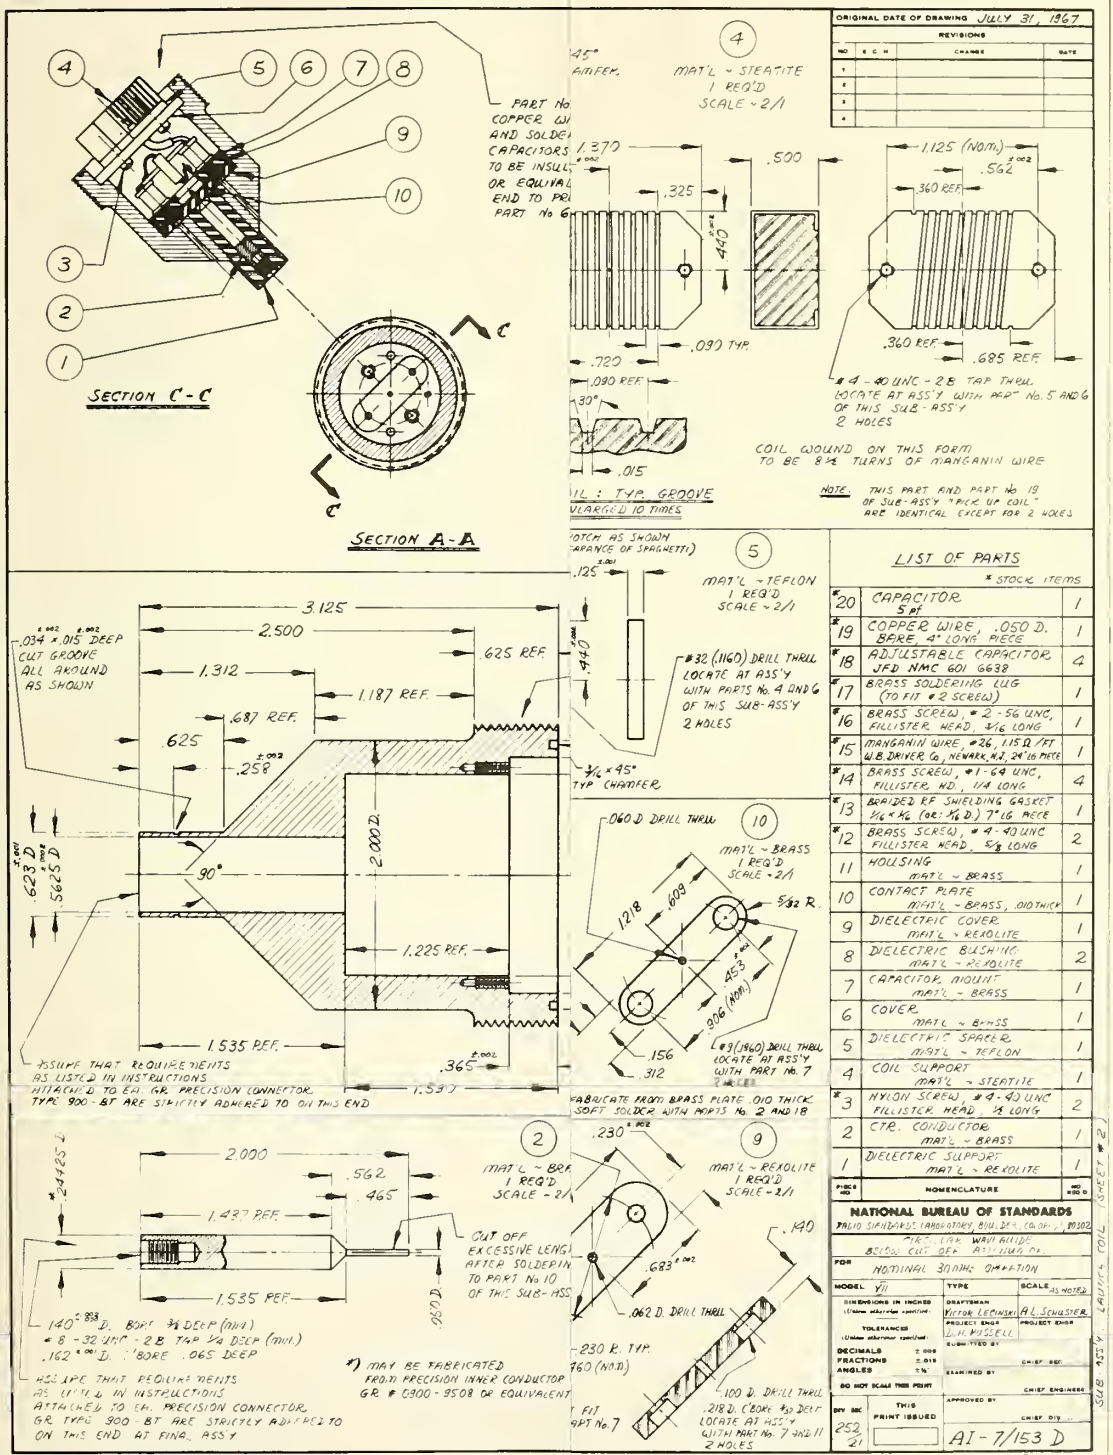
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO | E C N | CHANGE | DATE
SECTION C-C
SECTION A-A
PART No
COPPER WI
AND SOLDE
CAPACITORS
TO BE INSULT
OR EQUIVAL
END TO PR
PART No 6
4
MAT'L ~ STEATITE
1 REQ'D
SCALE ~ 2/1
1.370
.500
.325
.440
.090 TYP.
.720
.090 REF.
.30°
.015
1.125 (NOM.)
.562
.360 REF.
.360 REF.
.685 REF.
#4 - 40 UNC - 2B TAP THRU.
LOCATE AT ASS'Y WITH PART No. 5 AND 6
OF THIS SUB-ASS'Y
2 HOLES
COIL WOUND ON THIS FORM
TO BE 8½ TURNS OF MANGANIN WIRE
NOTE. THIS PART AND PART No 19
OF SUB-ASS'Y "PICK UP COIL"
ARE IDENTICAL EXCEPT FOR 2 HOLES
IL : TYP. GROOVE
ULARGED 10 TIMES
OTCH AS SHOWN
EARANCE OF SPAGHETTI)
5
MAT'L ~ TEFLON
1 REQ'D
SCALE ~ 2/1
.125
.440
#32 (.1160) DRILL THRU
LOCATE AT ASS'Y
WITH PARTS No. 4 AND 6
OF THIS SUB-ASS'Y
2 HOLES
1/16 x 45°
TYP CHAMFER
3.125
2.500
.625 REF.
1.312
1.187 REF.
.687 REF.
.625
.258
.034 x .015 DEEP
CUT GROOVE
ALL AROUND
AS SHOWN
2.000 D.
.623 D
.5625 D
90°
1.225 REF.
1.535 REF.
.365
1.537
ASSUME THAT REQUIREMENTS
AS LISTED IN INSTRUCTIONS
ATTACHED TO EA. GR. PRECISION CONNECTOR
TYPE 900 - BT ARE STRICTLY ADHERED TO ON THIS END
.060 D DRILL THRU
10
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
5/32 R.
1.218
.609
.453
.906 (NOM.)
.312
.156
#9 (.1960) DRILL THRU
LOCATE AT ASS'Y
WITH PART No. 7
FABRICATE FROM BRASS PLATE .010 THICK
SOFT SOLDER WITH PARTS No. 2 AND 18
2.000
.562
.465
1.437 REF.
1.535 REF.
.140 D. BORE ¾ DEEP (MIN.)
#8 - 32 UNC - 2B TAP ¼ DEEP (MIN.)
.162 D. C'BORE .065 DEEP
ASSUME THAT REQUIREMENTS
AS LISTED IN INSTRUCTIONS
ATTACHED TO EA. PRECISION CONNECTOR
GR TYPE 900 - BT ARE STRICTLY ADHERED TO
ON THIS END AT FINAL ASS'Y
2
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
CUT OFF
EXCESSIVE LENG
AFTER SOLDERIN
TO PART No. 10
OF THIS SUB-ASS
*) MAY BE FABRICATED
FROM PRECISION INNER CONDUCTOR
GR # 0900 - 9508 OR EQUIVALENT
9
MAT'L ~ REXOLITE
1 REQ'D
SCALE ~ 2/1
.230
.140
.683
.062 D. DRILL THRU
.230 R. TYP.
.760 (NOM.)
.100 D. DRILL THRU
.218 D. C'BORE ¾ DEEP
LOCATE AT ASS'Y
WITH PART No. 7 AND 11
2 HOLES
FIT
PART No. 7
LIST OF PARTS
* STOCK ITEMS
*20 CAPACITOR 5 pf 1
*19 COPPER WIRE, .050 D. BARE, 4" LONG PIECE 1
*18 ADJUSTABLE CAPACITOR, JFD NMC 601 6638 4
*17 BRASS SOLDERING LUG (TO FIT #2 SCREW) 1
*16 BRASS SCREW, #2 - 56 UNC, FILLISTER HEAD, 3/16 LONG 1
*15 MANGANIN WIRE, #26, 1.15 Ω/FT W.B. DRIVER CO., NEWARK, N.J., 24'16 METE 1
*14 BRASS SCREW, #1-64 UNC, FILLISTER, HD., 1/4 LONG 4
*13 BRAIDED RF SHIELDING GASKET 1/16 x ¼ (OR: 1/8 D.) 7"16 PIECE 1
*12 BRASS SCREW, #4-40 UNC FILLISTER HEAD, 5/8 LONG 2
11 HOUSING MAT'L ~ BRASS 1
10 CONTACT PLATE MAT'L ~ BRASS, .010 THICK 1
9 DIELECTRIC COVER MAT'L ~ REXOLITE 1
8 DIELECTRIC BUSHING MAT'L ~ REXOLITE 2
7 CAPACITOR MOUNT MAT'L ~ BRASS 1
6 COVER MAT'L ~ BRASS 1
5 DIELECTRIC SPACER MAT'L ~ TEFLON 1
4 COIL SUPPORT MAT'L ~ STEATITE 1
*3 NYLON SCREW, #4-40 UNC FILLISTER HEAD, ½ LONG 2
2 CTR. CONDUCTOR MAT'L ~ BRASS 1
1 DIELECTRIC SUPPORT MAT'L ~ REXOLITE 1
PIECE NO | NOMENCLATURE | MO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
FIRST LAW WAVEGUIDE
BELOW CUT OFF ATTENUATOR
FOR NOMINAL 3000 MC OPERATION
MODEL V/I
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES
TOLERANCES
DECIMALS ± .005
FRACTIONS ± .015
ANGLES ± ½°
DO NOT SCALE THIS PRINT
DRAFTSMAN VICTOR LECINSKI
PROJECT ENGR D.H. MISSELL
SUBMITTED BY
EXAMINED BY
APPROVED BY
A.L. SCHUSTER
PROJECT ENGR
CHIEF SEC.
CHIEF ENGINEER
CHIEF DIV.
DIV SEC
THIS PRINT ISSUED
252.21
AI - 7/153 D
SHEET 2 OF 13
SUB ASS'Y LAUNCH TOL SHEET # 2
8-4

Figure 27(c).

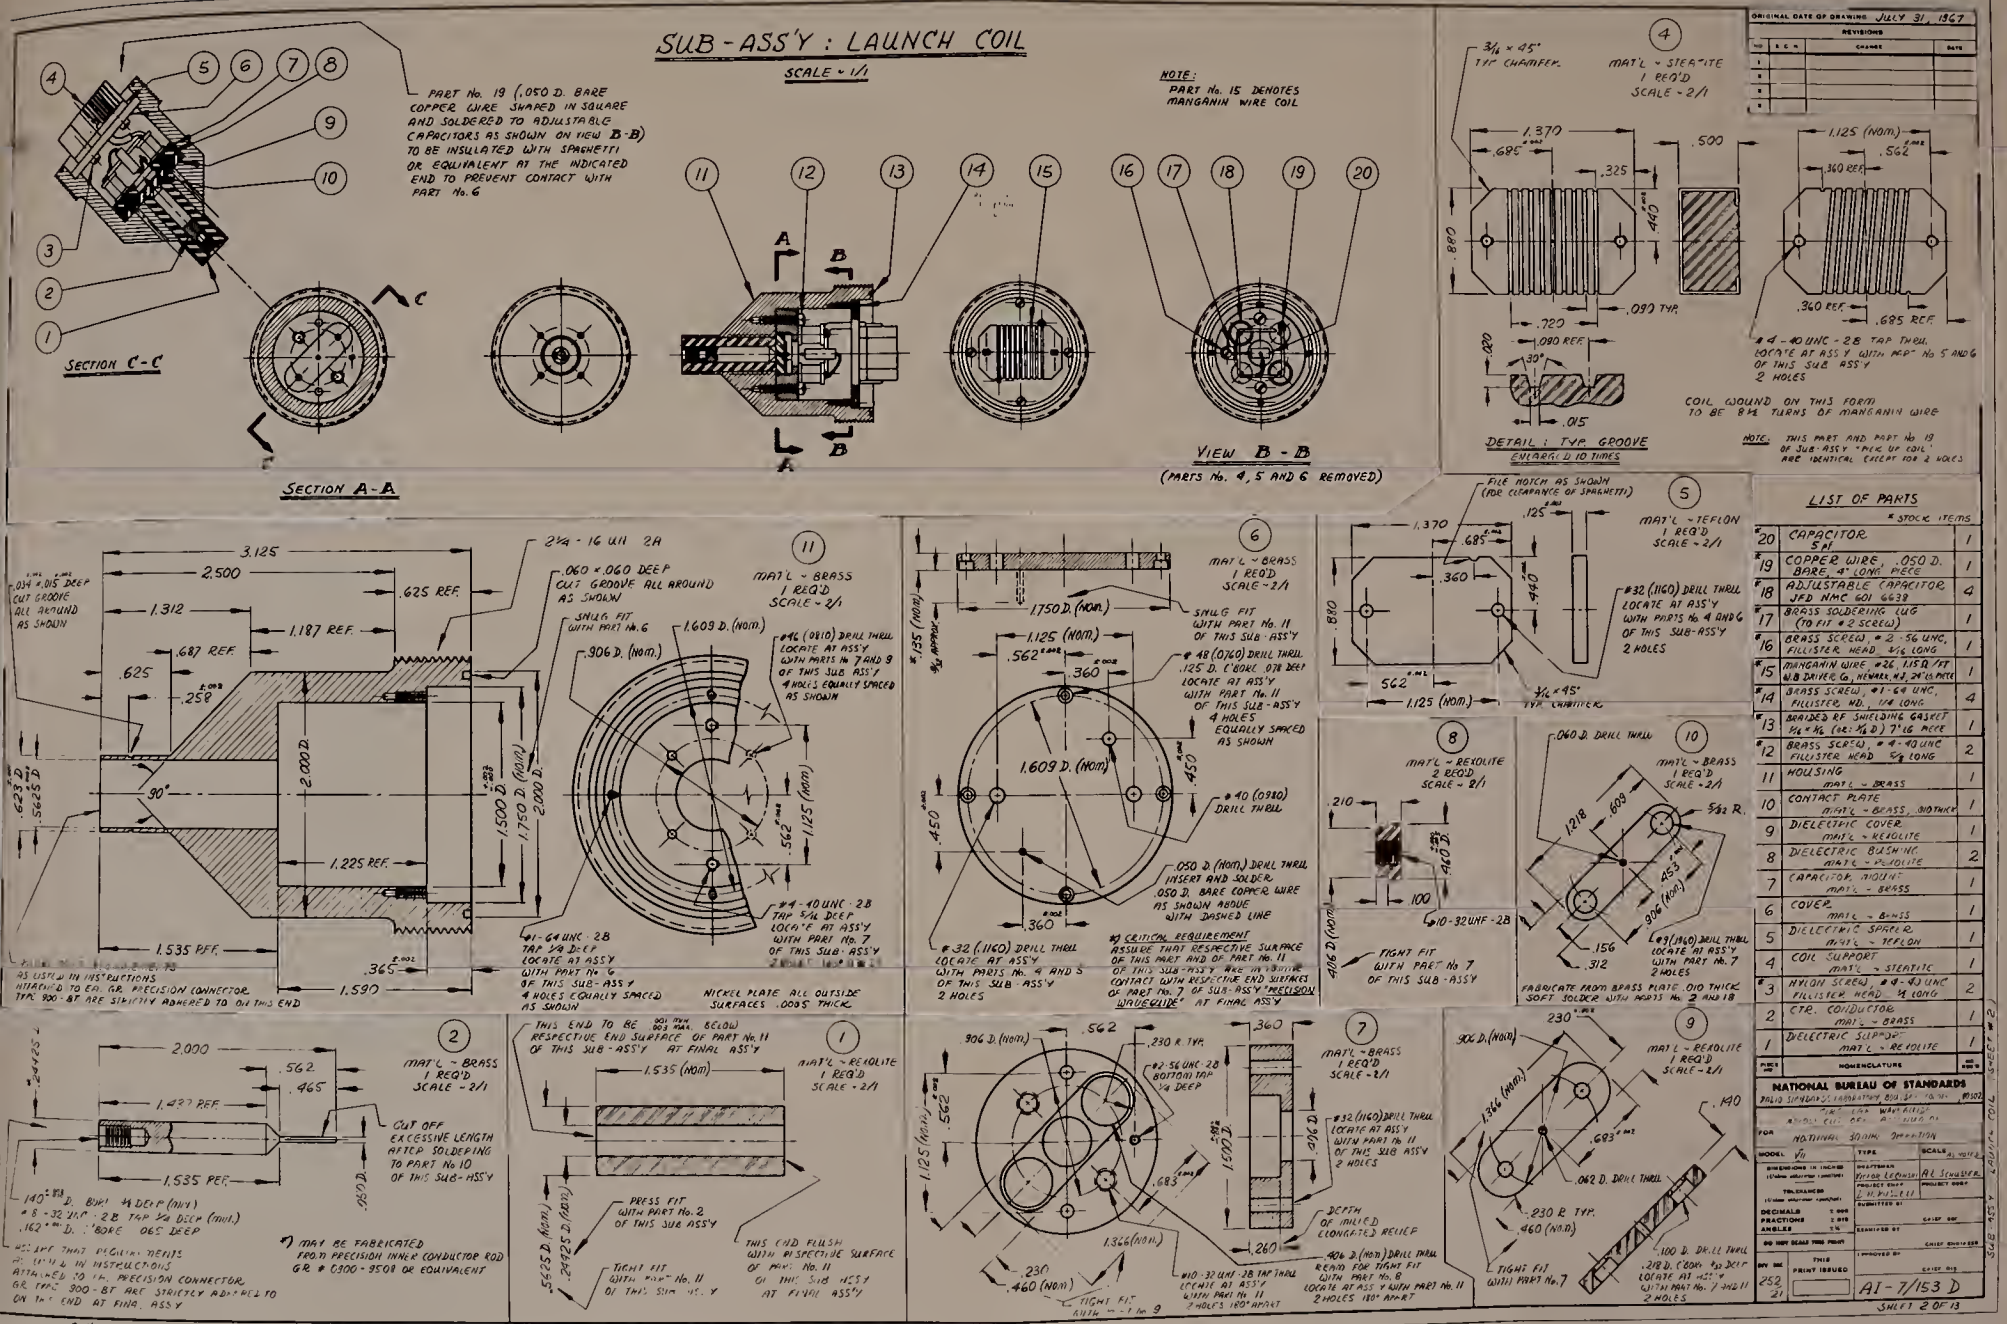
SUB-ASS'Y : LAUNCH COIL
SCALE ~ 1/1
NOTE: PART No. 15 DENOTES MANGANIN WIRE COIL
PART No. 19 (.050 D. BARE COPPER WIRE SHAPED IN SQUARE AND SOLDERED TO ADJUSTABLE CAPACITORS AS SHOWN ON VIEW B-B) TO BE INSULATED WITH SPAGHETTI OR EQUIVALENT AT THE INDICATED END TO PREVENT CONTACT WITH PART No. 6
SECTION C-C
SECTION A-A
VIEW B-B
(PARTS No. 4, 5 AND 6 REMOVED)
4
MAT'L ~ STEATITE
1 REQ'D
SCALE ~ 2/1
3/16 x 45° TYP. CHAMFER
1.370
.685
.500
.325
.880
.440
.720
.090 TYP
.090 REF
.020
.30°
.015
DETAIL : TYP GROOVE
ENLARGED TO THREE TIMES
1.125 (NOM.)
.562
.360 REF
.685 REF
#4-40 UNC-2B TAP THRU. LOCATE AT ASS'Y WITH PART No 5 AND 6 OF THIS SUB ASS'Y 2 HOLES
COIL WOUND ON THIS FORM TO BE 8½ TURNS OF MANGANIN WIRE
NOTE: THIS PART AND PART No 19 OF SUB-ASS'Y "PICK UP COIL" ARE IDENTICAL EXCEPT FOR 2 HOLES
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO. | BY | CHANGE | DATE
11
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
3.125
2.500
1.312
1.187 REF.
.687 REF.
.625
.625 REF.
.259
2.000 D.
1.500 D. (NOM.)
1.750 D. (NOM.)
2.000 D.
90°
1.225 REF.
1.535 REF.
.365
1.590
2¼ - 16 UN 2A
.060 x .060 DEEP CUT GROOVE ALL AROUND AS SHOWN
.034 x .015 DEEP CUT GROOVE ALL AROUND AS SHOWN
SNUG FIT WITH PART No. 6
1.609 D. (NOM.)
.906 D. (NOM.)
#46 (.0810) DRILL THRU LOCATE AT ASS'Y WITH PARTS No 7 AND 9 OF THIS SUB ASS'Y 4 HOLES EQUALLY SPACED AS SHOWN
#1-64 UNC-2B TAP ⅛ DEEP LOCATE AT ASS'Y WITH PART No. 7 OF THIS SUB-ASS'Y
#4-40 UNC-2B THD 5/16 DEEP LOCATE AT ASS'Y WITH PART No. 7 OF THIS SUB-ASS'Y
4 HOLES EQUALLY SPACED AS SHOWN
1.125 (NOM.)
.562
NICKEL PLATE ALL OUTSIDE SURFACES .0005 THICK
AS LISTED IN INSTRUCTIONS ATTACHED TO ER. GR. PRECISION CONNECTOR, TYPE 900-BT ARE STRICTLY ADHERED TO ON THIS END
6
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
1.750 D. (NOM.)
SNUG FIT WITH PART No. 11 OF THIS SUB-ASS'Y
1.125 (NOM.)
.562
.360
#48 (.0760) DRILL THRU .125 D. C'BORE .078 DEEP LOCATE AT ASS'Y WITH PART No. 11 OF THIS SUB-ASS'Y 4 HOLES EQUALLY SPACED AS SHOWN
1.609 D. (NOM.)
.450
#40 (.0980) DRILL THRU
.050 D. (NOM.) DRILL THRU INSERT AND SOLDER .050 D. BARE COPPER WIRE AS SHOWN ABOVE WITH DASHED LINE
#32 (.1160) DRILL THRU LOCATE AT ASS'Y WITH PARTS No. 4 AND 5 OF THIS SUB-ASS'Y 2 HOLES
#3 CRITICAL REQUIREMENT ASSURE THAT RESPECTIVE SURFACE OF THIS PART AND OF PART No. 11 OF THIS SUB-ASS'Y ARE IN POSITIVE CONTACT WITH RESPECTIVE END SURFACES OF PART No. 7 OF SUB-ASS'Y "PRECISION WAVEGUIDE" AT FINAL ASS'Y
5
MAT'L ~ TEFLON
1 REQ'D
SCALE ~ 2/1
FILE NOTCH AS SHOWN (FOR CLEARANCE OF SPAGHETTI)
1.370
.685
.125
.360
.880
.440
.562
1.125 (NOM.)
#32 (.1160) DRILL THRU LOCATE AT ASS'Y WITH PARTS No 4 AND 6 OF THIS SUB-ASS'Y 2 HOLES
8
MAT'L ~ REXOLITE
2 REQ'D
SCALE ~ 2/1
.210
.460 D.
.100
#10-32 UNF-2B
.406 D. (NOM.)
TIGHT FIT WITH PART No 7 OF THIS SUB-ASS'Y
10
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
.060 D. DRILL THRU
.609
.1218
5/32 R.
.453
.906 (NOM.)
.156
.312
#49 (.1960) DRILL THRU LOCATE AT ASS'Y WITH PART No. 7 2 HOLES
FABRICATE FROM BRASS PLATE .010 THICK SOFT SOLDER WITH PARTS No. 2 AND 18
2
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
2.000
.562
.465
1.477 REF.
1.535 REF.
.140 D. BUR 14 DEEP (MIN.) #8-32 UNF-2B TAP ½ DEEP (MIN.) .162 D. C'BORE .065 DEEP
.350 D.
CUT OFF EXCESSIVE LENGTH AFTER SOLDERING TO PART No 10 OF THIS SUB-ASS'Y
*) MAY BE FABRICATED FROM PRECISION INNER CONDUCTOR ROD GR # 0300-9508 OR EQUIVALENT
AS LISTED IN INSTRUCTIONS ATTACHED TO ER. GR. PRECISION CONNECTOR, TYPE 900-BT ARE STRICTLY ADHERED TO ON THIS END AT FINAL ASS'Y
1
MAT'L ~ REXOLITE
1 REQ'D
SCALE ~ 2/1
THIS END TO BE .001 TYP. .003 MAX. BELOW RESPECTIVE END SURFACE OF PART No. 11 OF THIS SUB-ASS'Y AT FINAL ASS'Y
1.535 (NOM.)
.5625 D. (NOM.)
.2425 D. (NOM.)
PRESS FIT WITH PART No. 2 OF THIS SUB ASS'Y
TIGHT FIT WITH PART No. 11 OF THIS SUB-ASS'Y
THIS END FLUSH WITH RESPECTIVE SURFACE OF PART No. 11 OF THIS SUB-ASS'Y AT FINAL ASS'Y
7
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 2/1
.906 D. (NOM.)
.562
.230 R TYP.
#2-56 UNC 2B BOTTOM TAP ¼ DEEP
.360
#32 (.1160) DRILL THRU LOCATE AT ASS'Y WITH PART No 11 OF THIS SUB ASS'Y 2 HOLES
1.125 (NOM.)
.562
.683
1.500 D.
.906 D.
.260
DEPTH OF DRILLED ELONGATED RELIEF
1.366 (NOM.)
.230
.460 (NOM.)
#10-32 UNF-2B TAP THRU REAM FOR TIGHT FIT LOCATE AT ASS'Y WITH PART No 11 2 HOLES 180° APART
.906 D. (NOM.) DRILL THRU REAM FOR TIGHT FIT WITH PART No. 8 LOCATE AT ASS'Y WITH PART No. 11 2 HOLES 180° APART
TIGHT FIT WITH PART No. 9
9
MAT'L ~ REXOLITE
1 REQ'D
SCALE ~ 2/1
.906 D. (NOM.)
.230
.460
1.366 (NOM.)
.693
.062 D. DRILL THRU
.230 R TYP.
.460 (NOM.)
.140
.100 D. DRILL THRU .218 D. C'BORE .120 DEEP LOCATE AT ASS'Y WITH PART No. 7 AND 11 2 HOLES
TIGHT FIT WITH PART No. 7
LIST OF PARTS
* STOCK ITEMS
#20 CAPACITOR 5 pf 1
#19 COPPER WIRE .050 D. BARE, 4" LONG FREE 1
#18 ADJUSTABLE CAPACITOR JFD NMC 601 6439 4
#17 BRASS SOLDERING LUG (TO FIT #2 SCREW) 1
#16 BRASS SCREW, #2-56 UNC, FILLISTER HEAD ⅛ LONG 1
#15 MANGANIN WIRE #26, 1.15Ω/FT H.B. DRIVER CO., NEWARK, N.J., 24" IS MADE 1
#14 BRASS SCREW, #1-64 UNC, FILLISTER, NO., 1/16 LONG 4
#13 BRAIDED RF SHIELDING GASKET ⅛ x ⅛ (OR: ⅛ D) 7" IS MADE 1
#12 BRASS SCREW, #4-40 UNC FILLISTER HEAD 5/16 LONG 2
11 HOUSING MAT'L ~ BRASS 1
10 CONTACT PLATE MAT'L ~ BRASS, .010 THICK 1
9 DIELECTRIC COVER MAT'L ~ REXOLITE 1
8 DIELECTRIC BUSHING MAT'L ~ REXOLITE 2
7 CAPACITOR, TUNING MAT'L ~ BRASS 1
6 COVER MAT'L ~ BRASS 1
5 DIELECTRIC SPACER MAT'L ~ TEFLON 1
4 COIL SUPPORT MAT'L ~ STEATITE 1
#3 NYLON SCREW, #4-40 UNC FILLISTER HEAD ¼ LONG 2
2 CTR. CONDUCTOR MAT'L ~ BRASS 1
1 DIELECTRIC SUPPORT MAT'L ~ REXOLITE 1
PIECE NO. | NOMENCLATURE | MFR'S NO.
NATIONAL BUREAU OF STANDARDS
FOR NATIONAL BUREAU OF STANDARDS
MODEL VII TYPE SCALE
DRAFTSMAN Victor Leonard
PROJECT ENGR. A.L. Lowstuter
PROJECT NUMBER
SUBMITTED BY
CHIEF DIV.
APPROVED BY
CHIEF DIV.
DO NOT SCALE THIS PRINT
DIMENSIONS IN INCHES
TOLERANCES
DECIMALS ± .005
FRACTIONS ± 1/64
ANGLES ± ½°
DWG. NO. AI-7/153 D
REV. NO.
THIS PRINT ISSUED
252
21
SHEET 2 OF 13
SUB ASS'Y LAUNCH COIL (SHEET #2)

Figure 27(c).

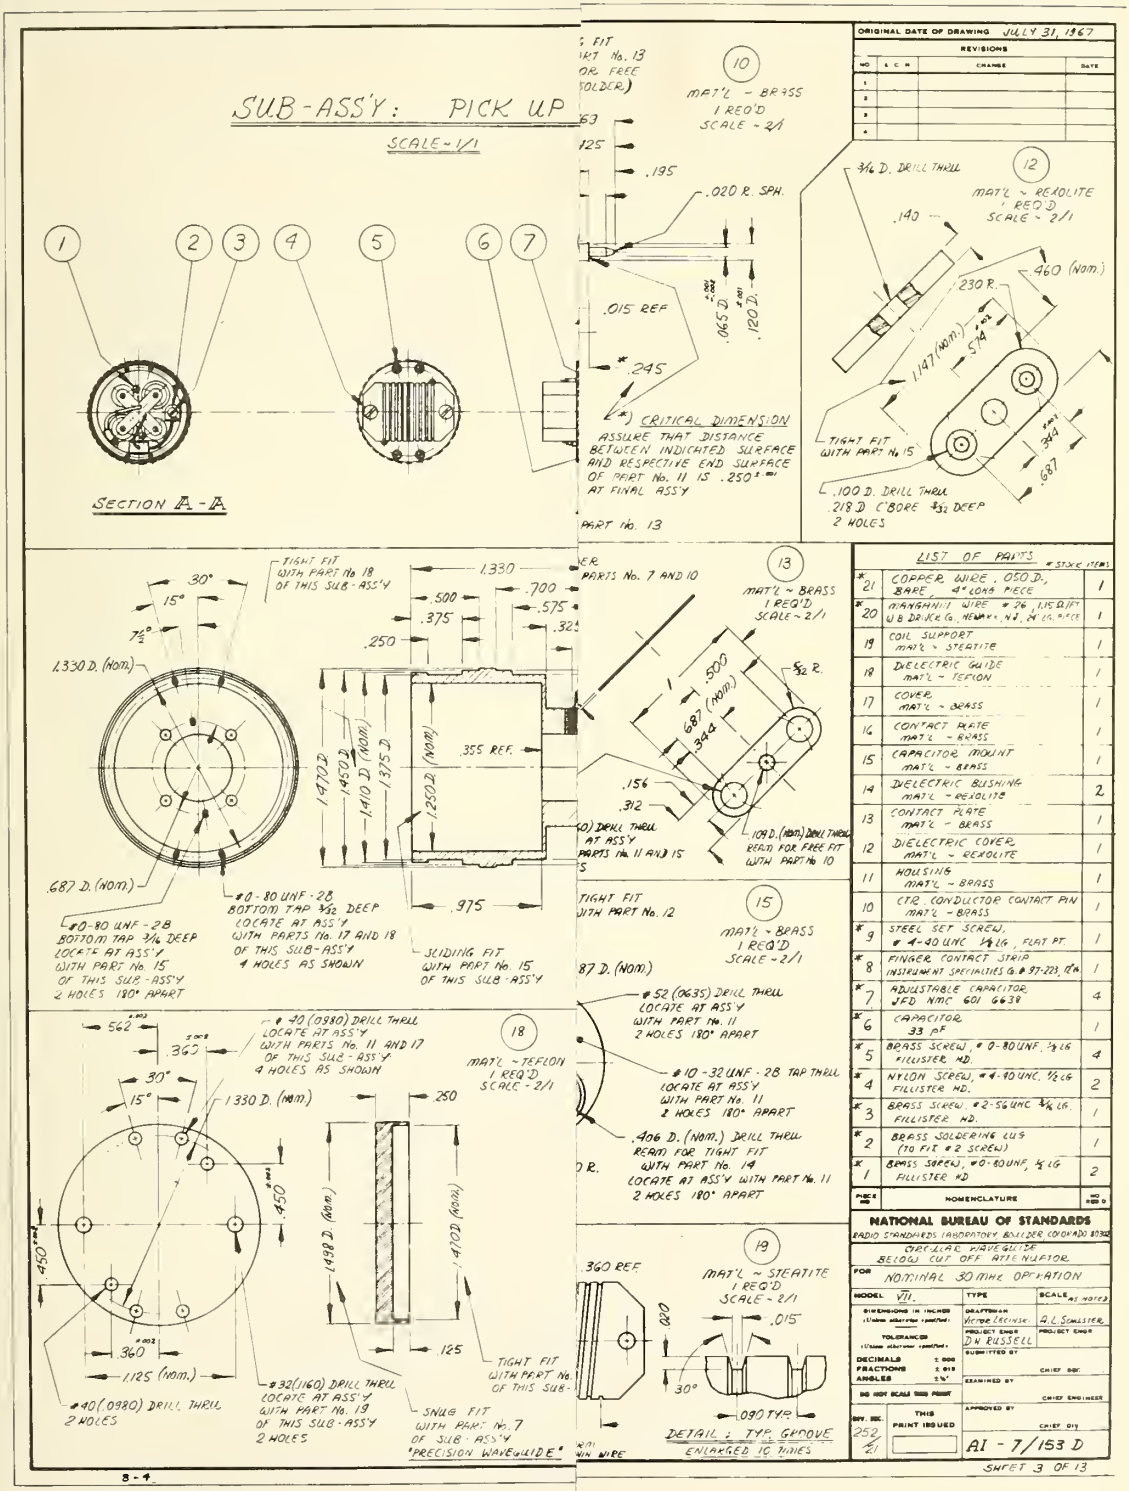
SUB-ASS'Y: PICK UP
SCALE - 1/1
SECTION A-A
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO | L C M | CHANGE | DATE
10
MAT'L - BRASS
1 REQ'D
SCALE - 2/1
.195
.020 R. SPH.
.015 REF
.245
CRITICAL DIMENSION
ASSURE THAT DISTANCE BETWEEN INDICATED SURFACE AND RESPECTIVE END SURFACE OF PART No. 11 IS .250 AT FINAL ASSY
PART No. 13
12
MAT'L - REXOLITE
1 REQ'D
SCALE - 2/1
3/16 D. DRILL THRU
.140
.460 (nom.)
.230 R.
1.147 (nom.)
.344
.687
TIGHT FIT WITH PART No. 15
.100 D. DRILL THRU
.218 D C'BORE 3/32 DEEP
2 HOLES
TIGHT FIT WITH PART No. 18 OF THIS SUB-ASS'Y
30°
15°
7 1/2°
1.330 D. (nom.)
.687 D. (nom.)
#0-80 UNF-2B BOTTOM TAP 3/16 DEEP LOCATE AT ASS'Y WITH PART No. 15 OF THIS SUB-ASS'Y 2 HOLES 180° APART
#0-80 UNF-2B BOTTOM TAP 3/32 DEEP LOCATE AT ASS'Y WITH PARTS No. 17 AND 18 OF THIS SUB-ASS'Y 4 HOLES AS SHOWN
SLIDING FIT WITH PART No. 15 OF THIS SUB-ASS'Y
1.330
.700
.575
.325
.500
.375
.250
1.470 D.
1.450 D.
1.410 D. (nom.)
1.375 D.
1.250 D. (nom.)
.355 REF.
.975
PARTS No. 7 AND 10
13
MAT'L - BRASS
1 REQ'D
SCALE - 2/1
.500
1
.687 (nom.)
.344
5/32 R.
.156
.312
.109 D. (nom.) DRILL THRU REAM FOR FREE FIT WITH PART No. 10
AT ASS'Y PARTS No. 11 AND 15
TIGHT FIT WITH PART No. 12
15
MAT'L - BRASS
1 REQ'D
SCALE - 2/1
87 D. (nom.)
#52 (0635) DRILL THRU LOCATE AT ASS'Y WITH PART No. 11 2 HOLES 180° APART
#10-32 UNF-2B TAP THRU LOCATE AT ASS'Y WITH PART No. 11 2 HOLES 180° APART
.406 D. (nom.) DRILL THRU REAM FOR TIGHT FIT WITH PART No. 14 LOCATE AT ASS'Y WITH PART No. 11 2 HOLES 180° APART
R.
.562
.360
#40 (0980) DRILL THRU LOCATE AT ASS'Y WITH PARTS No. 11 AND 17 OF THIS SUB-ASS'Y 4 HOLES AS SHOWN
30°
15°
1.330 D. (nom.)
.450
.360
1.125 (nom.)
#40 (0980) DRILL THRU 2 HOLES
18
MAT'L - TEFLON
1 REQ'D
SCALE - 2/1
.250
1.498 D. (nom.)
1.470 D. (nom.)
.125
#32 (1160) DRILL THRU LOCATE AT ASS'Y WITH PART No. 19 OF THIS SUB-ASS'Y 2 HOLES
SNUG FIT WITH PART No. 7 OF SUB-ASS'Y "PRECISION WAVEGUIDE"
TIGHT FIT WITH PART No. OF THIS SUB-
.360 REF
19
MAT'L - STEATITE
1 REQ'D
SCALE - 2/1
.020
.015
30°
.090 TYP.
DETAIL : TYP. GROOVE ENLARGED 10 TIMES
LIST OF PARTS
STKD ITEMS
*21 COPPER WIRE, .050 D., BARE, 4" LONG PIECE 1
*20 MANGANIN WIRE #36, 1.15 Ω/FT U.S. DRUCE G. NEWARK, N.J. 24 in. PIECE 1
19 COIL SUPPORT MAT'L - STEATITE 1
18 DIELECTRIC GUIDE MAT'L - TEFLON 1
17 COVER MAT'L - BRASS 1
16 CONTACT PLATE MAT'L - BRASS 1
15 CAPACITOR MOUNT MAT'L - BRASS 1
14 DIELECTRIC BUSHING MAT'L - REXOLITE 2
13 CONTACT PLATE MAT'L - BRASS 1
12 DIELECTRIC COVER MAT'L - REXOLITE 1
11 HOUSING MAT'L - BRASS 1
10 CTR. CONDUCTOR CONTACT PIN MAT'L - BRASS 1
*9 STEEL SET SCREW, #4-40 UNC 1/4 LG., FLAT PT. 1
*8 FINGER CONTACT STRIP INSTRUMENT SPECIALTIES CO. # 97-223, 1" LG. 1
*7 ADJUSTABLE CAPACITOR JFD NMC 601 6638 4
*6 CAPACITOR .33 pF 1
*5 BRASS SCREW, #0-80 UNF. 1/8 LG FILLISTER HD. 4
*4 NYLON SCREW, #4-40 UNC. 1/2 LG FILLISTER HD. 2
*3 BRASS SCREW, #2-56 UNC 3/16 LG. FILLISTER HD. 1
*2 BRASS SOLDERING LUG (TO FIT #2 SCREW) 1
*1 BRASS SCREW, #0-80 UNF, 1/8 LG FILLISTER HD 2
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY BOULDER COLORADO 80302
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MHz OPERATION
MODEL VII. TYPE SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
DRAFTSMAN Victor Lacinski
A. L. Schlister
PROJECT ENGR
TOLERANCES (Unless otherwise specified)
PROJECT ENGR D.N. Russell
SUBMITTED BY
DECIMALS ± .005
FRACTIONS ± 1/64
ANGLES ± 1/2°
CHIEF DIV.
DO NOT SCALE THIS PRINT
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
DEV. NO. 252
THIS PRINT ISSUED
CHIEF DIV.
AI - 7/153 D
SHEET 3 OF 13
8-9

Figure 27(d).

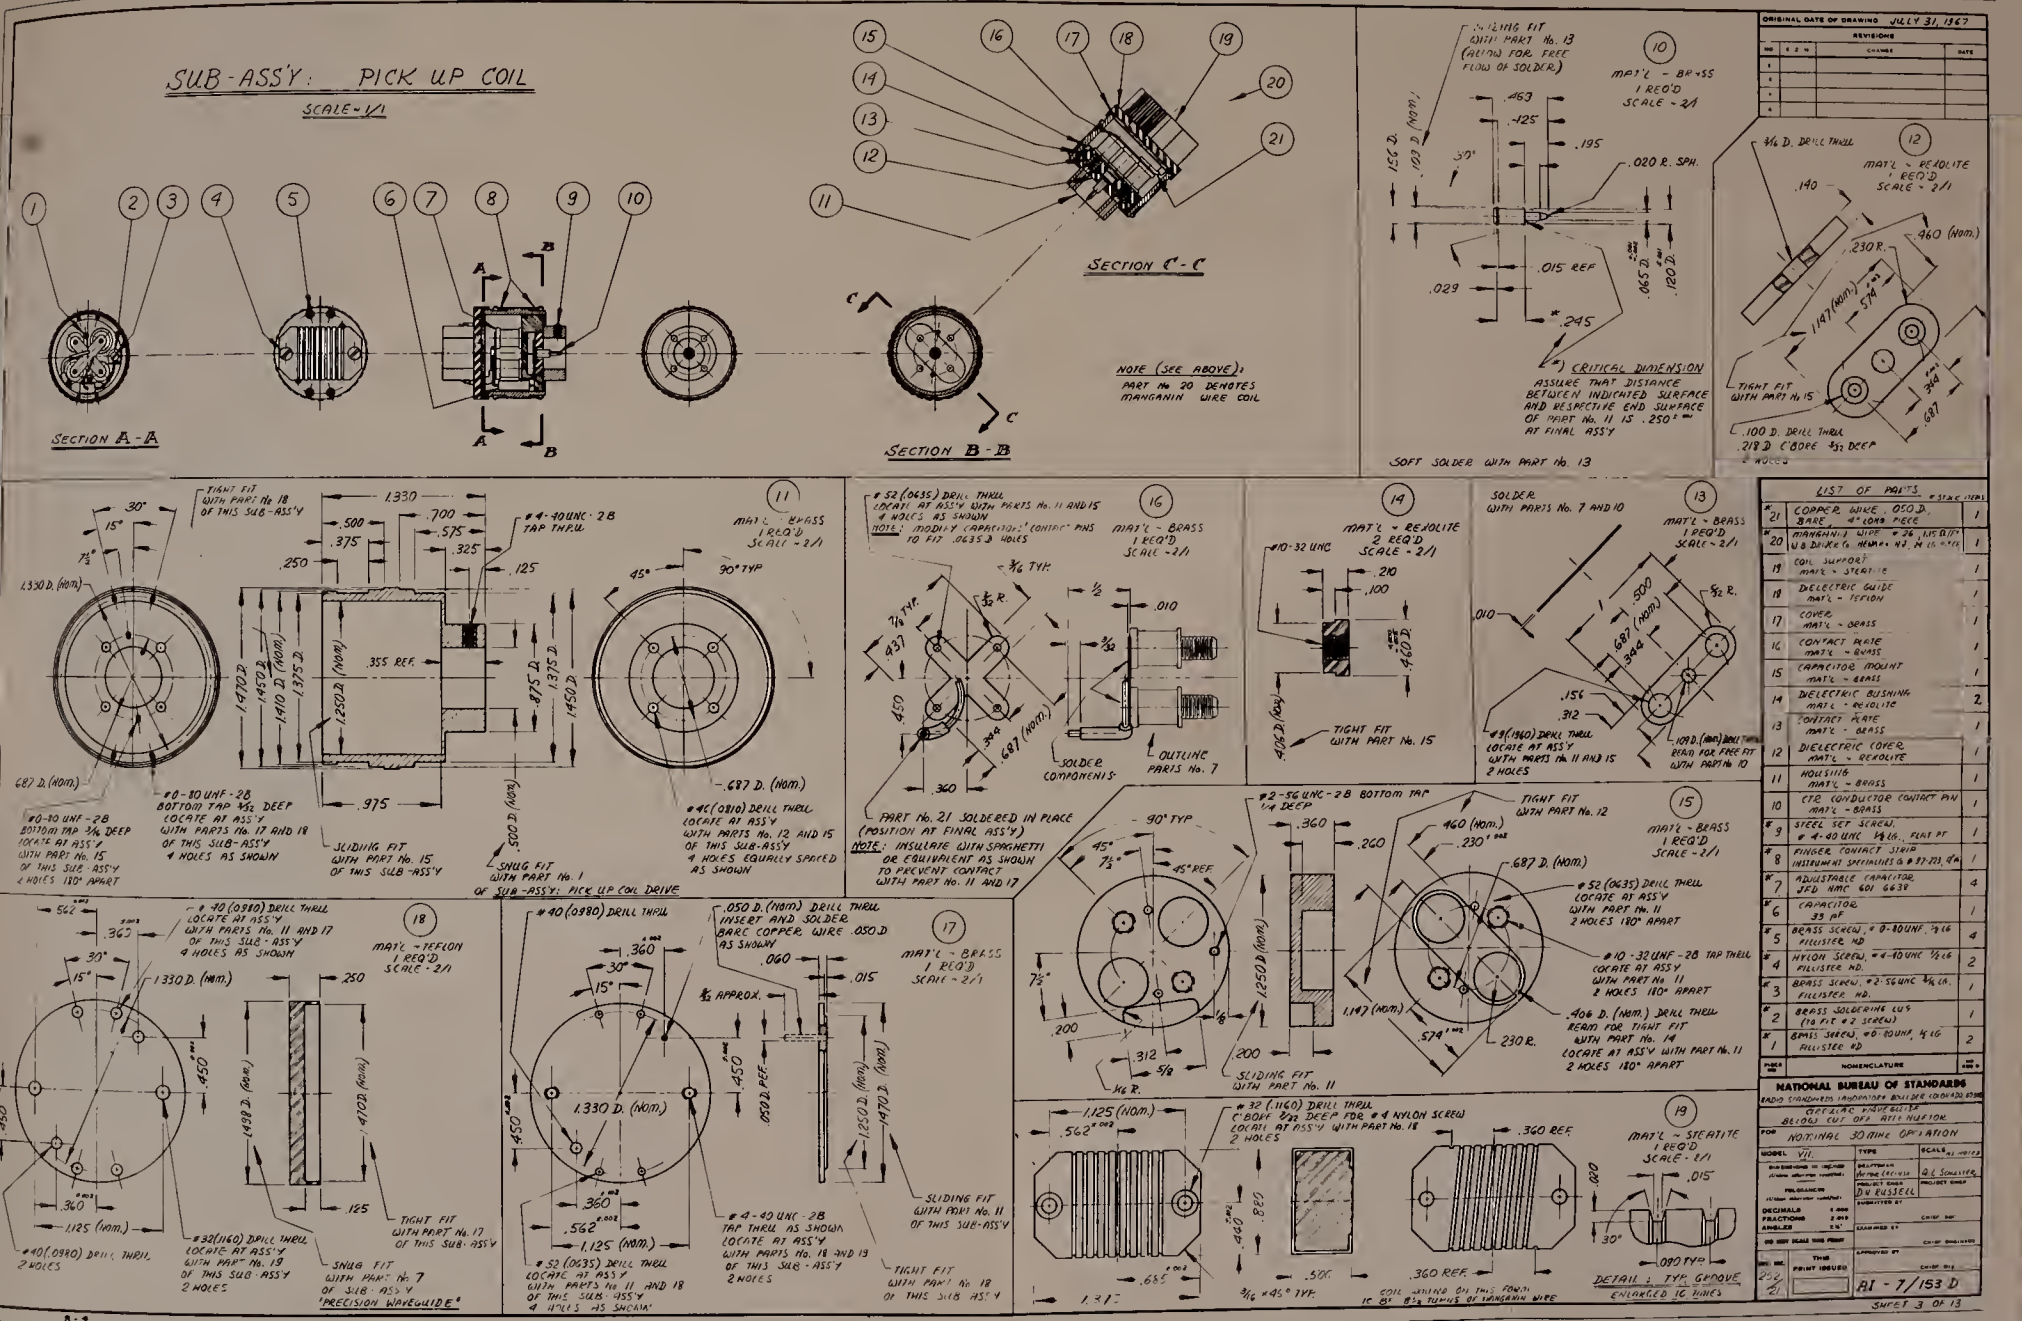
SUB-ASS'Y: PICK UP COIL
SCALE - 1/1
SECTION A-A
SECTION B-B
SECTION C-C
NOTE (SEE ABOVE): PART No 20 DENOTES MANGANIN WIRE COIL
SOFT SOLDER WITH PART No. 13
*) CRITICAL DIMENSION
ASSURE THAT DISTANCE BETWEEN INDICATED SURFACE AND RESPECTIVE END SURFACE OF PART No. 11 IS .250 AT FINAL ASS'Y
SLIDING FIT WITH PART No. 15 OF THIS SUB-ASS'Y
SNUG FIT WITH PART No. 1 OF SUB-ASS'Y: PICK UP COIL DRIVE
TIGHT FIT WITH PART No 18 OF THIS SUB-ASS'Y
TIGHT FIT WITH PART No. 15
TIGHT FIT WITH PART No. 12
SLIDING FIT WITH PART No. 11
TIGHT FIT WITH PART No. 17 OF THIS SUB-ASS'Y
SNUG FIT WITH PART No. 7 OF SUB-ASS'Y 'PRECISION WAVEGUIDE'
TIGHT FIT WITH PART No 18 OF THIS SUB ASS'Y
SOLDER COMPONENTS
OUTLINE PARTS No. 7
PART No. 21 SOLDERED IN PLACE (POSITION AT FINAL ASS'Y)
NOTE: INSULATE WITH SPAGHETTI OR EQUIVALENT AS SHOWN TO PREVENT CONTACT WITH PART No. 11 AND 17
SOLDER WITH PARTS No. 7 AND 10
COIL WOUND ON THIS FORM IS 8½ TURNS OF MANGANIN WIRE
DETAIL: TYP GROOVE ENLARGED 10 TIMES
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
LIST OF PARTS
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY BOULDER COLORADO
OFFICIAL WAVEGUIDE BELOW CUT OFF ATTENUATION
FOR NOTIONAL 30 MINE OPERATION
MODEL VII
TYPE
SCALE
DRAWN BY G.E. SCHAUER
PROJECT ENGR D.W. RUSSELL
SUBMITTED BY
CHIEF ENGR
CHECKED BY
CHIEF DRAFTSMAN
APPROVED BY
CHIEF ENGR
THIS PRINT ISSUED
AI - 7/153 D
SHEET 3 OF 13

Figure 27(d).

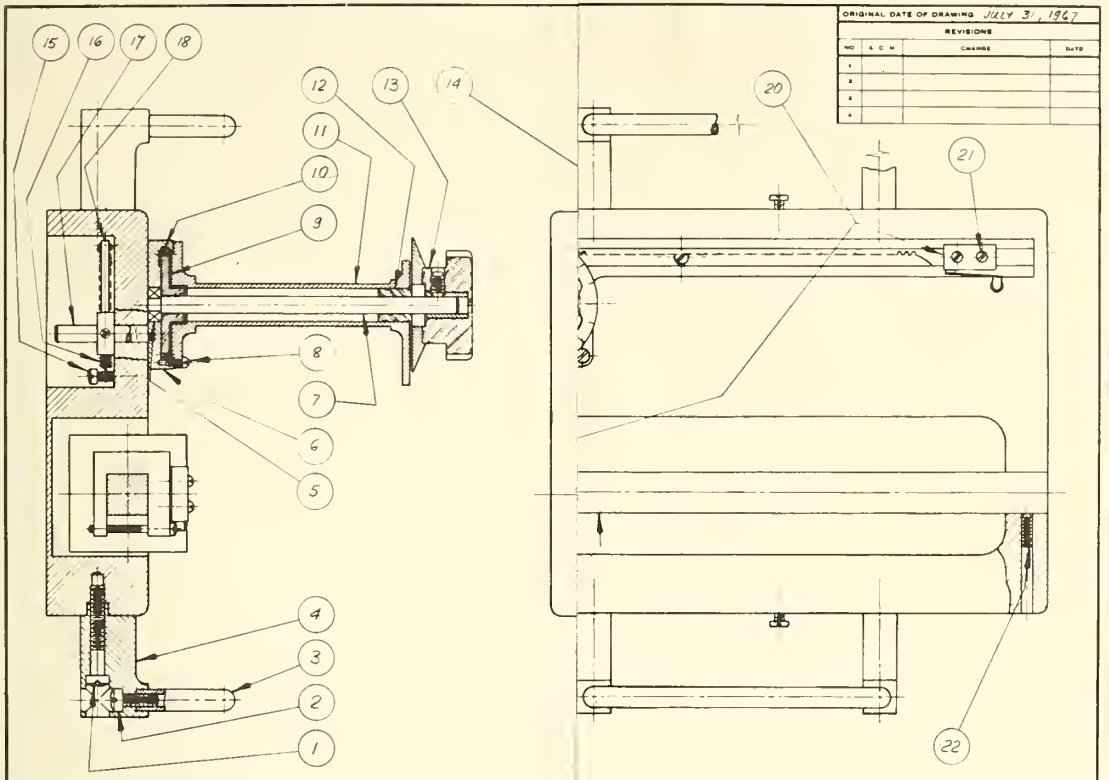

ORIGINAL DATE OF DRAWING JULY 31, 1967

REVISIONS

NO	L C N	CHANGE	DATE
1			
2			
3			
4			

SUB-ASSY: ATT

SCALE ~ MASTER

		QTY
	(STOCK ITEMS)	
	STEEL SCREW, #6-32 UNC, FLAT HEAD, ½ LONG	1
	BRASS SCREW, #4-40 UNC, ROUND HD. ¾ LONG	4
	COMMERCIAL KNOB (BRANTLITE) #10-10 DIAL, ¼ D SHAFT HOLE	1
	BUSHING MAT'L ~ TEFLON	1
	BEARING COVER MAT'L ~ BRASS	1
.187	BRASS RACK GEAR, 48 PITCH, 14½° P.A., BOSTON CAT. No. G 586 2 FT LONG	1
	BRASS SPUR GEAR, 48 PITCH, 20 T.D., 14½° P.A., BOSTON CAT. No. G 146	1
	BRASS SCREW #2-56 UNC, ROUND HEAD, ¼ LONG	3
	SHAFT MAT'L ~ STEEL	1
	BEARING HOUSING MAT'L ~ BRASS	1
	BALL BEARING, .500 O.D., .1875 I.D. NEW DEPARTURE # 77R3	1
	HANDLE EXTENSION MAT'L ~ BRASS	8
	COMMERCIAL CHASSIS HANDLE NTG CTRS x 5/8 D x 1 5/8 HEIGHT 32 UNF TAPPED HOLES, BRASS	4
	BRASS SCREW #10-32 UNF CHEESE HEAD ½ LONG	8
	BRASS SCREW #10-32 UNF FLAT HEAD, 1¼ LONG	8

NOMENCLATURE	NO REQ'D

NOTE: ITEMS NO. 1, 2, 3 AND 4 ARE OPTIONAL (USED FOR TRANSPORTATION ONLY)

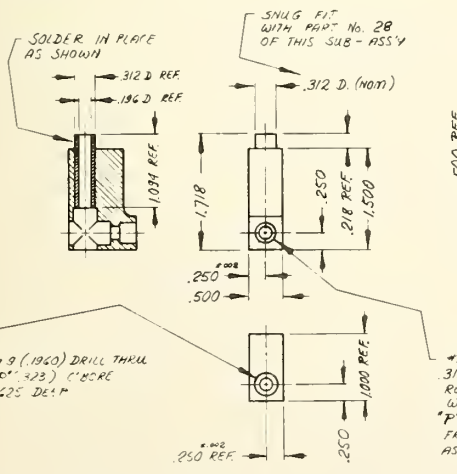

PIECE NO	NOMENCLATURE	NO REQ'D
	NATIONAL BUREAU OF STANDARDS RADIO STANDARDS LABORATORY, BOULDER COLORADO 80302	
	CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR,	
FOR	NOMINAL 30 MINE OPERATION	

MODEL VII	TYPE	SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)	DRAFTSMAN Victor Lechner	A.L. SCHLUSTER
TOLERANCES (Unless otherwise specified)	PROJECT ENGR D.H. RUSSELL	PROJECT ENGR
DECIMALS ± .005 FRACTIONS ± .015 ANGLES ± ½°	SUBMITTED BY	CHIEF SEC
DO NOT SCALE THIS PRINT	EXAMINED BY	CHIEF ENGINEER
DIV SEC 252 21	THIS PRINT ISSUED	APPROVED BY CHIEF DIV

AI-7/153 D

SUB-ASSY: ATTENUATOR BASE (SHEETS #4 & 5 ARE #6.)

SHEET 4 OF 13

Figure 27(e).

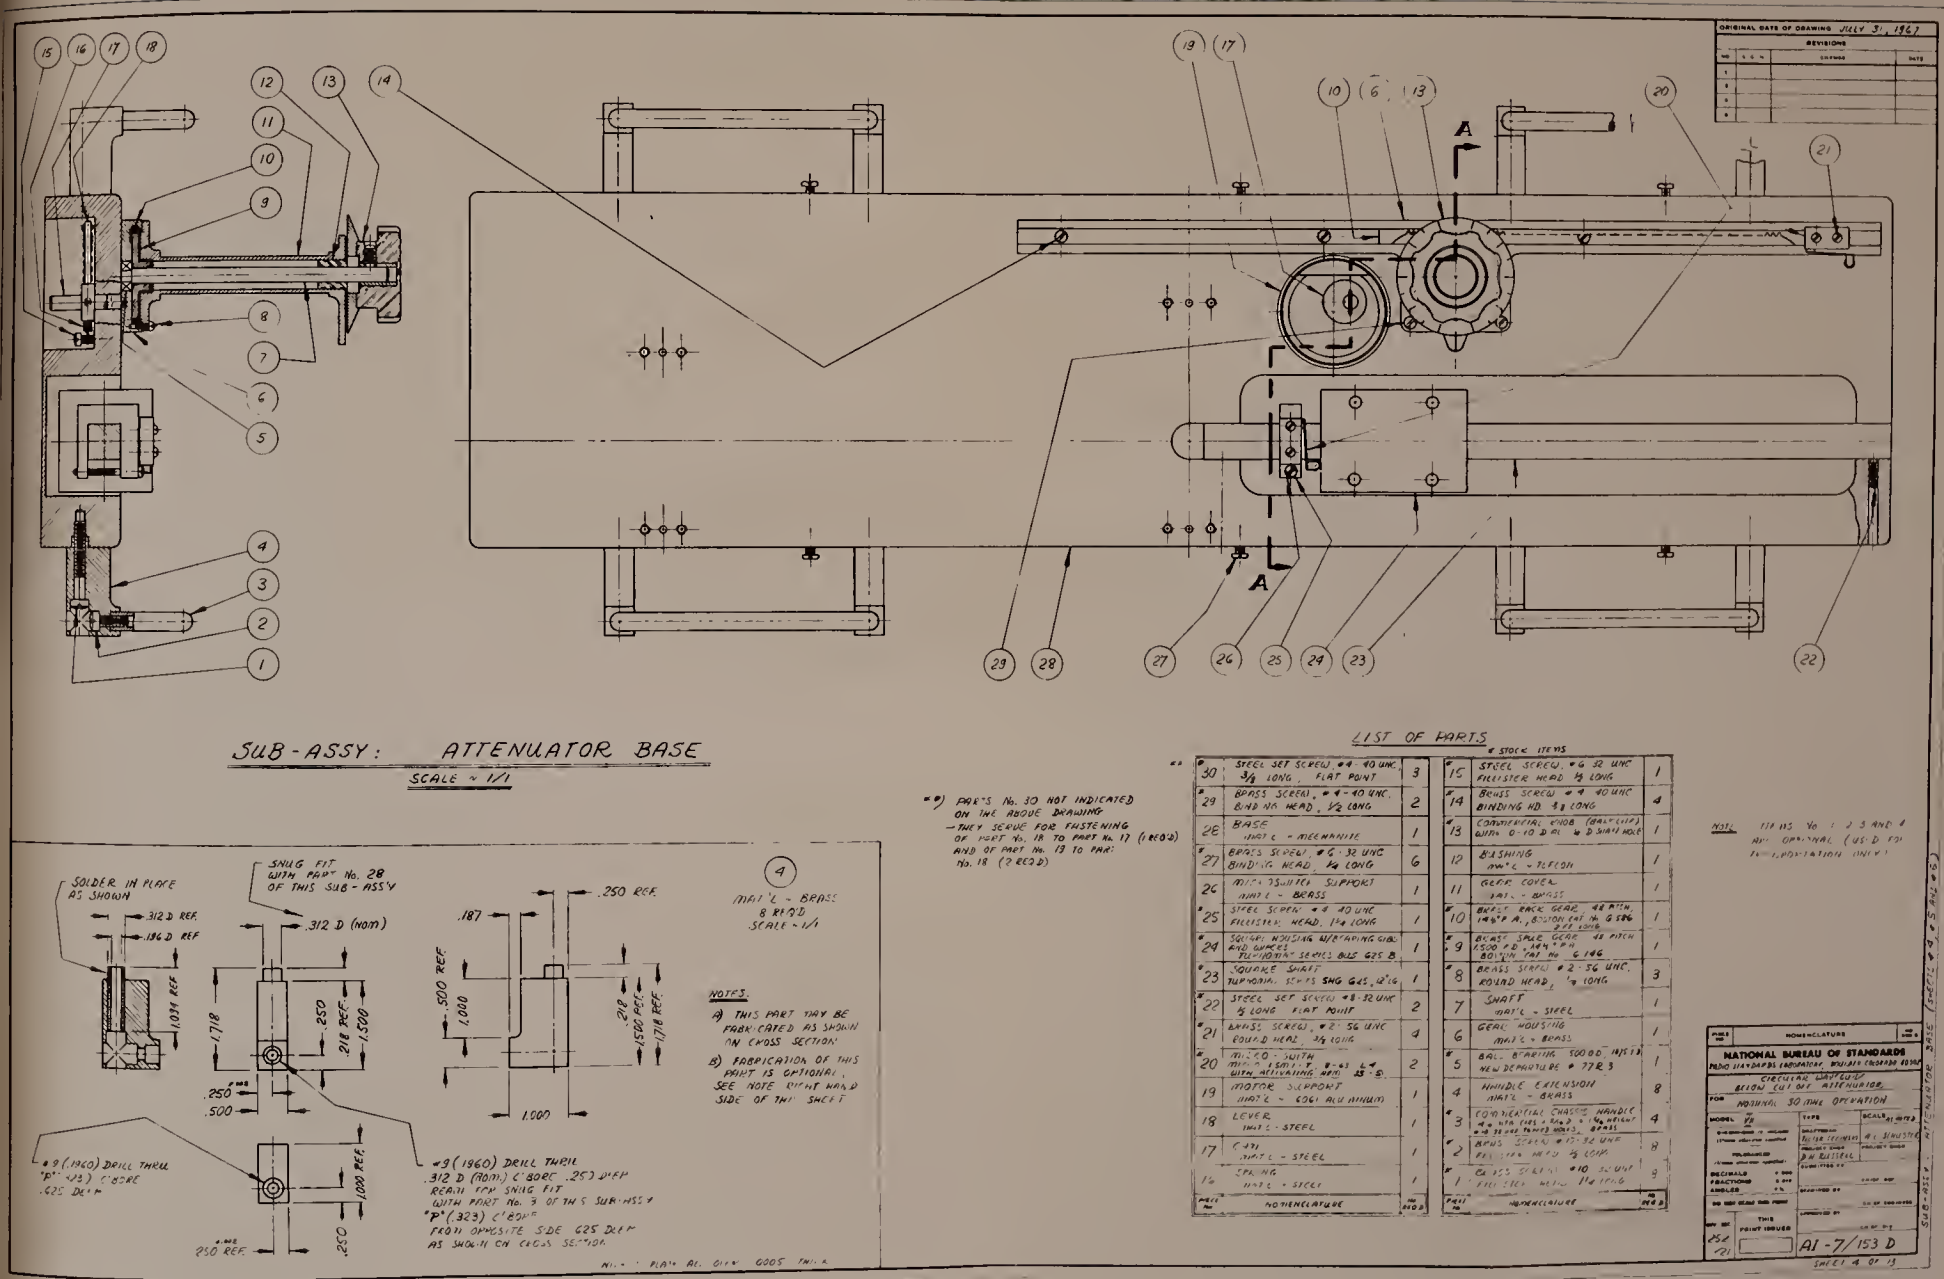
SUB-ASSY: ATTENUATOR BASE
SCALE ~ 1/1
SOLDER IN PLACE AS SHOWN
SNUG FIT WITH PART No. 28 OF THIS SUB-ASSY
.312 D (nom.)
.312 D REF.
.196 D REF.
.034 REF.
.718
.250
.218 REF.
1.500
.500
.250 REF.
.187
.500 REF.
1.000
.218
1.500 REF.
.718 REF.
#9 (.1960) DRILL THRU "P" (.323) C'BORE .625 DEEP
#9 (.1960) DRILL THRU .312 D (nom.) C'BORE .25" DEEP REAM FOR SNUG FIT WITH PART No. 3 OF THIS SUB-ASSY "P" (.323) C'BORE FROM OPPOSITE SIDE .625 DEEP AS SHOWN ON CROSS SECTION
.000 REF.
.250
.250 REF.
4
MAT'L - BRASS
8 REQ'D
SCALE ~ 1/1
NOTES:
A) THIS PART MAY BE FABRICATED AS SHOWN IN CROSS SECTION.
B) FABRICATION OF THIS PART IS OPTIONAL, SEE NOTE RIGHT HAND SIDE OF THIS SHEET
#9) PARTS No. 30 NOT INDICATED ON THE ABOVE DRAWING - THEY SERVE FOR FASTENING OF PART No. 17 (1 REQ'D) AND OF PART No. 13 TO PAR: No. 18 (2 REQ'D)
LIST OF PARTS
STOCK ITEMS
30 | STEEL SET SCREW, #4-40 UNC. 3/8 LONG, FLAT POINT | 3
#29 | BRASS SCREW, #4-40 UNC. BIND NO HEAD, 1/2 LONG | 2
28 | BASE MAT'L - MECHANITE | 1
#27 | BRASS SCREW, #6-32 UNC BINDING HEAD, 1/4 LONG | 6
26 | MICRO SWITCH SUPPORT MAT'L - BRASS | 1
#25 | STEEL SCREW #4-40 UNC FILLISTER HEAD, 1/4 LONG | 1
#24 | SQUIRE HOUSING WITH SET SCREW AND WASHER FLEXIBLE SHAFT ASSY. MS 25 B | 1
#23 | SQUARE SHAFT TUFNOL, STOCK SNG G25, 12"LG | 1
#22 | STEEL SET SCREW #8-32 UNC 1/8 LONG FLAT POINT | 2
#21 | BRASS SCREW, #2-56 UNC ROUND HEAD, 3/8 LONG | 4
#20 | MICRO SWITCH MICRO SWITCH "P" 8-63 "L" WITH ACTUATING ARM MS 25 B | 2
19 | MOTOR SUPPORT MAT'L - CAST ALUMINUM | 1
18 | LEVER MAT'L - STEEL | 1
17 | CAM MAT'L - STEEL | 1
16 | SPRING MAT'L - STEEL | 1
PART NO. | NOMENCLATURE | NO REQ'D
#15 | STEEL SCREW, #6-32 UNC FILLISTER HEAD 1/2 LONG | 1
#14 | BRASS SCREW #4-40 UNC BINDING HD. 3/8 LONG | 4
13 | CONFIDENTIAL KNOB (CALIBRATED) WITH 0-10 DIAL & D SHAFT HOLE | 1
12 | BUSHING MAT'L - TEFLON | 1
11 | GEAR COVER MAT'L - BRASS | 1
#10 | BRASS RACK GEAR, 48 PITCH, 14½° P.A., BOSTON GEAR NO. G 586 2 1/2 LONG | 1
#9 | BRASS SPUR GEAR 48 PITCH 1.500 P.D. .187 "P" BORE BOSTON GEAR NO. G 196 | 1
#8 | BRASS SCREW #2-56 UNC. ROUND HEAD, 1/8 LONG | 3
7 | SHAFT MAT'L - STEEL | 1
6 | GEAR HOUSING MAT'L - BRASS | 1
#5 | BALL BEARING 500 O.D. MRC 19 NEW DEPARTURE # 77R3 | 1
4 | HANDLE EXTENSION MAT'L - BRASS | 8
#3 | CONFIDENTIAL CHASSIS HANDLE #4-40 NTH (SEE 3 REQ'D) & 1/4" HEIGHT #8-32 UNC TAPED HOLES, BRASS | 4
#2 | BRASS SCREW #12-32 UNC FILLISTER HEAD 3/4 LONG | 8
#1 | BRASS SCREW #10-32 UNC FILLISTER HEAD 1/4 LONG | 8
PART NO. | NOMENCLATURE | NO REQ'D
NOTE: ITEMS No.: 2, 3 AND 4 ARE OPTIONAL (USED FOR FINE ATTENUATION ONLY)
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO | LTR | DESCRIPTION | DATE
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER COLORADO 80302
CIRCUIT LAYOUT
BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 DB/DC OPERATION
MODEL 1/8
TYPE
SCALE 4/1 SIZE
DRAWN BY
CHECKED BY
APPROVED BY
THIS POINT ISSUED
A1-7/153 D
SHEET 4 OF 13
SUB-ASSY: ATTENUATOR BASE (SHEET 4 OF 5 SHEETS)

Figure 27(e).

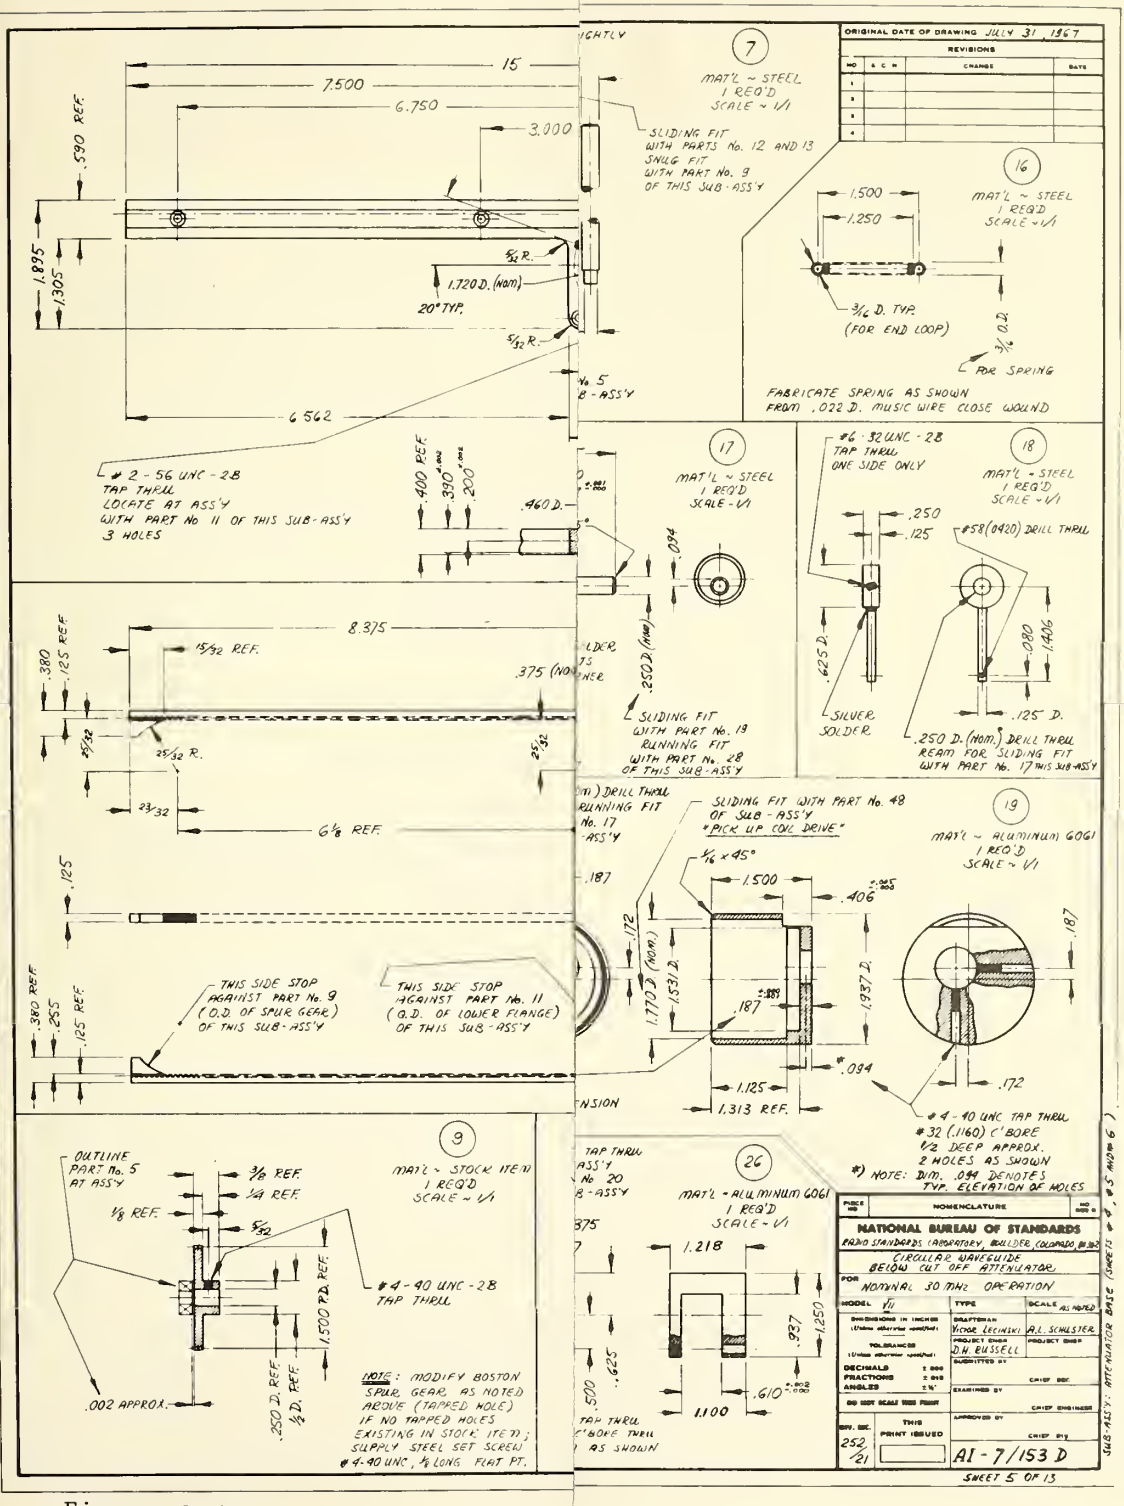
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO. | S. C. N. | CHANGE | DATE
7
MAT'L ~ STEEL
1 REQ'D
SCALE ~ 1/1
SLIDING FIT WITH PARTS No. 12 AND 13
SNUG FIT WITH PART No. 9 OF THIS SUB-ASS'Y
15
7.500
6.750
3.000
.590 REF.
1.895
1.305
5/32 R.
1.720 D. (nom.)
20° TYP.
5/32 R.
6.562
2 - 56 UNC - 2B TAP THRU
LOCATE AT ASS'Y WITH PART No. 11 OF THIS SUB-ASS'Y
3 HOLES
16
MAT'L ~ STEEL
1 REQ'D
SCALE ~ 1/1
1.500
1.250
3/16 D. TYP. (FOR END LOOP)
3/16
FOR SPRING
FABRICATE SPRING AS SHOWN FROM .022 D. MUSIC WIRE CLOSE WOUND
17
MAT'L ~ STEEL
1 REQ'D
SCALE ~ 1/1
.400 REF.
.330
.200
.460 D.
.094
.250 D. (nom.)
SLIDING FIT WITH PART No. 19 RUNNING FIT WITH PART No. 28 OF THIS SUB-ASS'Y
18
MAT'L ~ STEEL
1 REQ'D
SCALE ~ 1/1
#6 - 32 UNC - 2B TAP THRU ONE SIDE ONLY
.250
.125
#58 (0420) DRILL THRU
.625 D.
SILVER SOLDER.
.080
.1406
.125 D.
.250 D. (nom.) DRILL THRU REAM FOR SLIDING FIT WITH PART No. 17 THIS SUB-ASS'Y
8.375
15/32 REF.
.380
.125 REF.
5/32
25/32 R.
.375 (nom.)
25/32
23/32
6 1/8 REF.
.125
.380 REF.
.255
.125 REF.
THIS SIDE STOP AGAINST PART No. 9 (O.D. OF SPUR GEAR) OF THIS SUB-ASS'Y
THIS SIDE STOP AGAINST PART No. 11 (O.D. OF LOWER FLANGE) OF THIS SUB-ASS'Y
SLIDING FIT WITH PART No. 48 OF SUB-ASS'Y "PICK UP COIL DRIVE"
19
MAT'L ~ ALUMINUM 6061
1 REQ'D
SCALE ~ 1/1
1/16 x 45°
1.500
.406
.172
1.770 D. (nom.)
1.531 D.
1.937 D.
.187
1.125
1.313 REF.
.094
.187
.172
4 - 40 UNC TAP THRU
32 (.1160) C'BORE
1/2 DEEP APPROX.
2 HOLES AS SHOWN
*) NOTE: DIM. .094 DENOTES TYP. ELEVATION OF HOLES
9
MAT'L ~ STOCK ITEM
1 REQ'D
SCALE ~ 1/1
OUTLINE PART No. 5 AT ASS'Y
3/8 REF.
1/4 REF.
1/8 REF.
5/32
#4 - 40 UNC - 2B TAP THRU
1.500 P.D. REF.
.002 APPROX.
.250 D. REF.
1/8 D. REF.
NOTE: MODIFY BOSTON SPUR GEAR, AS NOTED ABOVE (TAPPED HOLE) IF NO TAPPED HOLES EXISTING IN STOCK ITEM; SUPPLY STEEL SET SCREW #4-40 UNC, 1/8 LONG FLAT PT.
26
MAT'L ~ ALUMINUM 6061
1 REQ'D
SCALE ~ 1/1
1.218
.937
1.250
.625
.500
.610
1.100
NOMENCLATURE
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MHz OPERATION
MODEL No.
TYPE
SCALE AS NOTED
DRAFTSMAN Victor Lecinski
PROJECT ENGR D.W. RUSSELL
A.L. SCHLISTER
PROJECT ENGR
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIMENSIONS IN INCHES
DECIMALS ± .005
FRACTIONS ± 1/64
ANGLES ± 1/2°
DO NOT SCALE THIS PRINT
THIS PRINT ISSUED
DRW. SEC. 252/21
AI - 7/153 D
SUB-ASS'Y: ATTENUATOR BASE (SHEETS # 4, # 5 AND # 6)
SHEET 5 OF 13

Figure 27(f).

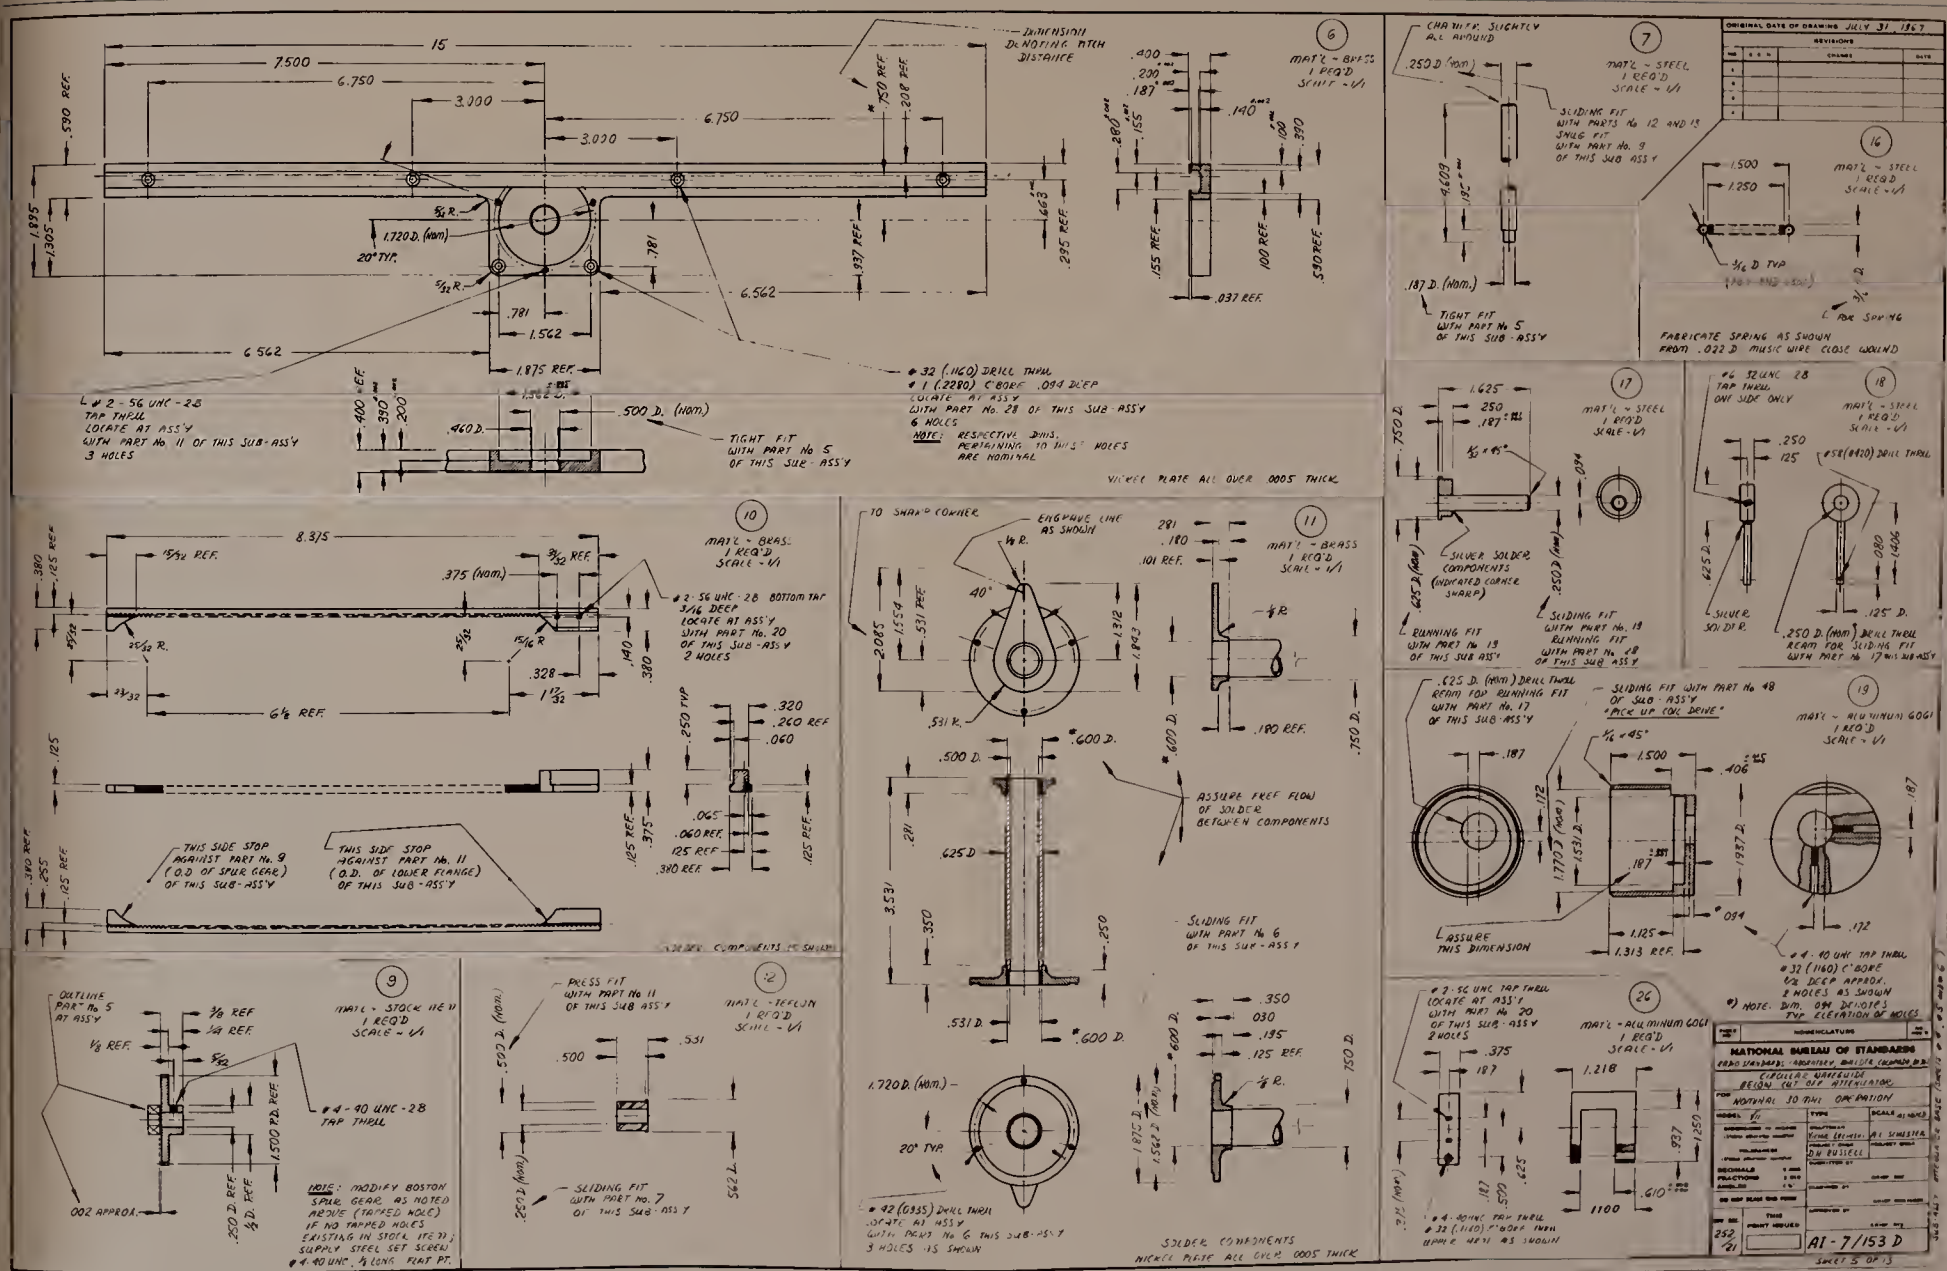
15
7.500
6.750
3.000
6.562
1.562
1.875 REF.
.590 REF.
1.720 D. (nom.)
20° TYP.
.781
.460 D.
500 D. (nom.)
TIGHT FIT WITH PART No 5 OF THIS SUB-ASS'Y
32 (.1160) DRILL THRU
1 (.2280) C'BORE .094 DEEP
LOCATE AT ASS'Y WITH PART No 28 OF THIS SUB-ASS'Y
6 HOLES
NOTE: RESPECTIVE DIMS. PERTAINING TO THIS HOLES ARE NOMINAL
DIMENSION DENOTING PITCH DISTANCE
2-56 UNC-2B TAP THRU
LOCATE AT ASS'Y WITH PART No 11 OF THIS SUB-ASS'Y
3 HOLES
6
MAT'L - BRASS
1 REQ'D
SCALE - 1/1
7
MAT'L - STEEL
1 REQ'D
SCALE - 1/1
CHAMFER SLIGHTLY ALL AROUND
.250 D (nom.)
SLIDING FIT WITH PARTS No 12 AND 13
SNUG FIT WITH PART No. 9 OF THIS SUB ASS'Y
4.609
.187 D. (nom.)
TIGHT FIT WITH PART No 5 OF THIS SUB-ASS'Y
16
MAT'L - STEEL
1 REQ'D
SCALE - 1/1
1.500
1.250
5/16 D TYP
FOR SPRING
FABRICATE SPRING AS SHOWN FROM .022 D MUSIC WIRE CLOSE WOUND
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
17
MAT'L - STEEL
1 REQ'D
SCALE - 1/1
.750 D.
.625 D (nom.)
SILVER SOLDER COMPONENTS (INDICATED CORNER SHARP)
RUNNING FIT WITH PART No 19 OF THIS SUB ASS'Y
SLIDING FIT WITH PART No. 19
RUNNING FIT WITH PART No. 18 OF THIS SUB ASS'Y
18
MAT'L - STEEL
1 REQ'D
SCALE - 1/1
#6 32 UNC 2B TAP THRU ONE SIDE ONLY
#38 (.1040) DRILL THRU
.625 D.
SILVER SOLDER
.250 D. (nom.) DRILL THRU REAM FOR SLIDING FIT WITH PART No 17 THIS SUB-ASS'Y
.125" D.
10
MAT'L - BRASS
1 REQ'D
SCALE - 1/1
8.315
.375 (nom.)
2-56 UNC-2B BOTTOM TAP 3/16 DEEP
LOCATE AT ASS'Y WITH PART No. 20 OF THIS SUB-ASS'Y
2 HOLES
6 1/8 REF.
THIS SIDE STOP AGAINST PART No. 9 (O.D. OF SPUR GEAR) OF THIS SUB-ASS'Y
THIS SIDE STOP AGAINST PART No. 11 (O.D. OF LOWER FLANGE) OF THIS SUB-ASS'Y
11
MAT'L - BRASS
1 REQ'D
SCALE - 1/1
TO SHARP CORNER
ENGRAVE LINE AS SHOWN
40°
.531 R.
.600 D.
.500 D.
.625 D
.531 D.
ASSURE FREE FLOW OF SOLDER BETWEEN COMPONENTS
SLIDING FIT WITH PART No 6 OF THIS SUB-ASS'Y
1.720 D. (nom.)
20° TYP.
42 (.0935) DRILL THRU
LOCATE AT ASS'Y WITH PART No 6 THIS SUB-ASS'Y
3 HOLES AS SHOWN
SOLDER COMPONENTS
NICKEL PLATE ALL OVER .0005 THICK
19
MAT'L - ALUMINUM GOLD
1 REQ'D
SCALE - 1/1
.625 D. (nom.) DRILL THRU REAM FOR RUNNING FIT WITH PART No. 17 OF THIS SUB-ASS'Y
SLIDING FIT WITH PART No 18 OF SUB-ASS'Y "PICK UP COIL DRIVE"
1/4 x 45°
ASSURE THIS DIMENSION
4-40 UNC TAP THRU
32 (.1160) C'BORE
0.2 DEEP APPROX.
2 HOLES AS SHOWN
*) NOTE: DIM. DIM DENOTES TYP ELEVATION OF HOLES
9
MAT'L - STOCK 11E 11
1 REQ'D
SCALE - 1/1
OUTLINE PART No. 5 AT ASS'Y
4-40 UNC-2B TAP THRU
1.500 P.D. REF
.250 D. REF
.002 APPROX.
NOTE: MODIFY BOSTON SPUR GEAR AS NOTED ABOVE (TAPPED HOLE) IF NO TAPPED HOLES EXISTING IN STOCK ITEM; SUPPLY STEEL SET SCREW # 4-40 UNC 1/8 LONG FLAT PT.
12
MAT'L - TEFLON
1 REQ'D
SCALE - 1/1
PRESS FIT WITH PART No 11 OF THIS SUB ASS'Y
.500 D. (nom.)
.531
.500
.250 D. (nom.)
SLIDING FIT WITH PART No. 7 OF THIS SUB-ASS'Y
.562 L.
26
MAT'L - ALUMINUM GOLD
1 REQ'D
SCALE - 1/1
7-56 UNC TAP THRU
LOCATE AT ASS'Y WITH PART No 20 OF THIS SUB-ASS'Y
2 HOLES
.375
.187
1.218
.610
1100
4-40 UNC TAP THRU
32 (.1160) C'BORE THRU UPPER HOLE AS SHOWN
NOMENCLATURE
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS: ADAPTIVE ANTENNA PROJECT
COAXIAL WAVEGUIDE
REGION CUT OFF ATTENUATOR
FOR NOMINAL 30 MHz OPERATION
DRAWN BY DW RUSSELL
AI SYMSTER
AI-7/153 D
SHEET 5 OF 13

Figure 27(f).

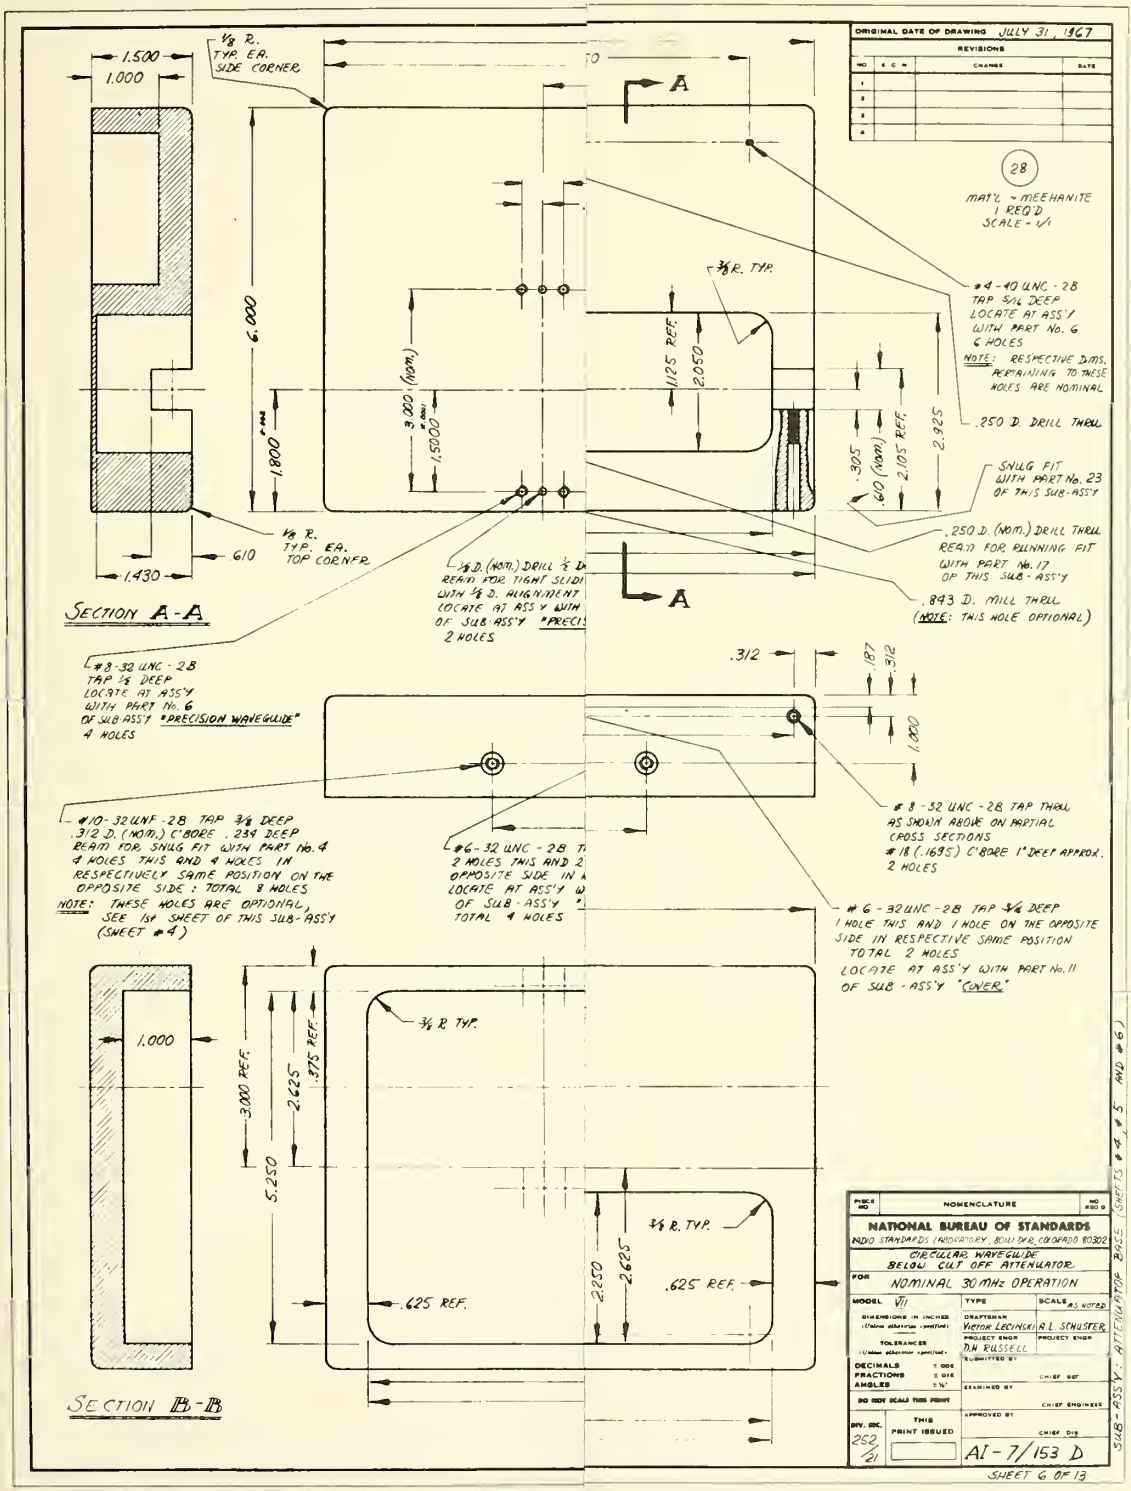
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO. E.C.N. CHANGE DATE
28
MAT'L ~ MEEHANITE
1 REQ'D
SCALE ~ 1/1
1.500
1.000
1/8 R. TYP. EA. SIDE CORNER
6.000
1.800
3.000 (NOM.)
1.5000
1/8 R. TYP. EA. TOP CORNER
.610
1.430
SECTION A-A
3/8 R. TYP.
1.125 REF.
2.050
#4-40 UNC-2B TAP 5/16 DEEP LOCATE AT ASS'Y WITH PART No. 6 6 HOLES
NOTE: RESPECTIVE DIMS. REMAINING TO THESE HOLES ARE NOMINAL
.250 D. DRILL THRU
.305
.60 (NOM.)
2.105 REF.
2.925
SNUG FIT WITH PART No. 23 OF THIS SUB-ASS'Y
.250 D. (NOM.) DRILL THRU REAM FOR RUNNING FIT WITH PART No. 17 OF THIS SUB-ASS'Y
.843 D. MILL THRU (NOTE: THIS HOLE OPTIONAL)
#8-32 UNC-2B TAP 1/2 DEEP LOCATE AT ASS'Y WITH PART No. 6 OF SUB ASS'Y "PRECISION WAVEGUIDE" 4 HOLES
.312
.187
.312
1.000
#10-32 UNF-2B TAP 3/8 DEEP .312 D. (NOM.) C'BORE .234 DEEP REAM FOR SNUG FIT WITH PART No. 4 4 HOLES THIS AND 4 HOLES IN RESPECTIVELY SAME POSITION ON THE OPPOSITE SIDE: TOTAL 8 HOLES
NOTE: THESE HOLES ARE OPTIONAL, SEE 1st SHEET OF THIS SUB-ASS'Y (SHEET #4)
#8-32 UNC-2B TAP THRU AS SHOWN ABOVE ON PARTIAL CROSS SECTIONS #18 (.1695) C'BORE 1" DEEP APPROX. 2 HOLES
#6-32 UNC-2B T
2 HOLES THIS AND 2
OPPOSITE SIDE IN
LOCATE AT ASS'Y
OF SUB-ASS'Y
TOTAL 4 HOLES
#6-32 UNC-2B TAP 3/8 DEEP 1 HOLE THIS AND 1 HOLE ON THE OPPOSITE SIDE IN RESPECTIVE SAME POSITION TOTAL 2 HOLES LOCATE AT ASS'Y WITH PART No. 11 OF SUB-ASS'Y "COVER"
1.000
3.000 REF.
2.625
.375 REF.
5.250
3/8 R. TYP.
3/8 R. TYP.
2.250
2.625
.625 REF.
.625 REF.
SECTION B-B
PIECE NO. NOMENCLATURE NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO 80302
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 mHz OPERATION
MODEL VII
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES
TOLERANCES
DECIMALS ± .002
FRACTIONS ± 0/64
ANGLES ± 1/4°
DO NOT SCALE THIS PRINT
DRAFTSMAN Victor Lecinski
PROJECT ENGR D.N. RUSSELL
SUBMITTED BY
EXAMINED BY
APPROVED BY
A.L. SCHUSTER
PROJECT ENGR
CHIEF SEC
CHIEF ENGINEER
CHIEF DIV
DIV. SEC. 252.21
THIS PRINT ISSUED
AI-7/153 D
SUB-ASS'Y: ATTENUATOR BASE (SHEETS #4, #5 AND #6)
SHEET 6 OF 13

Figure 27(g).

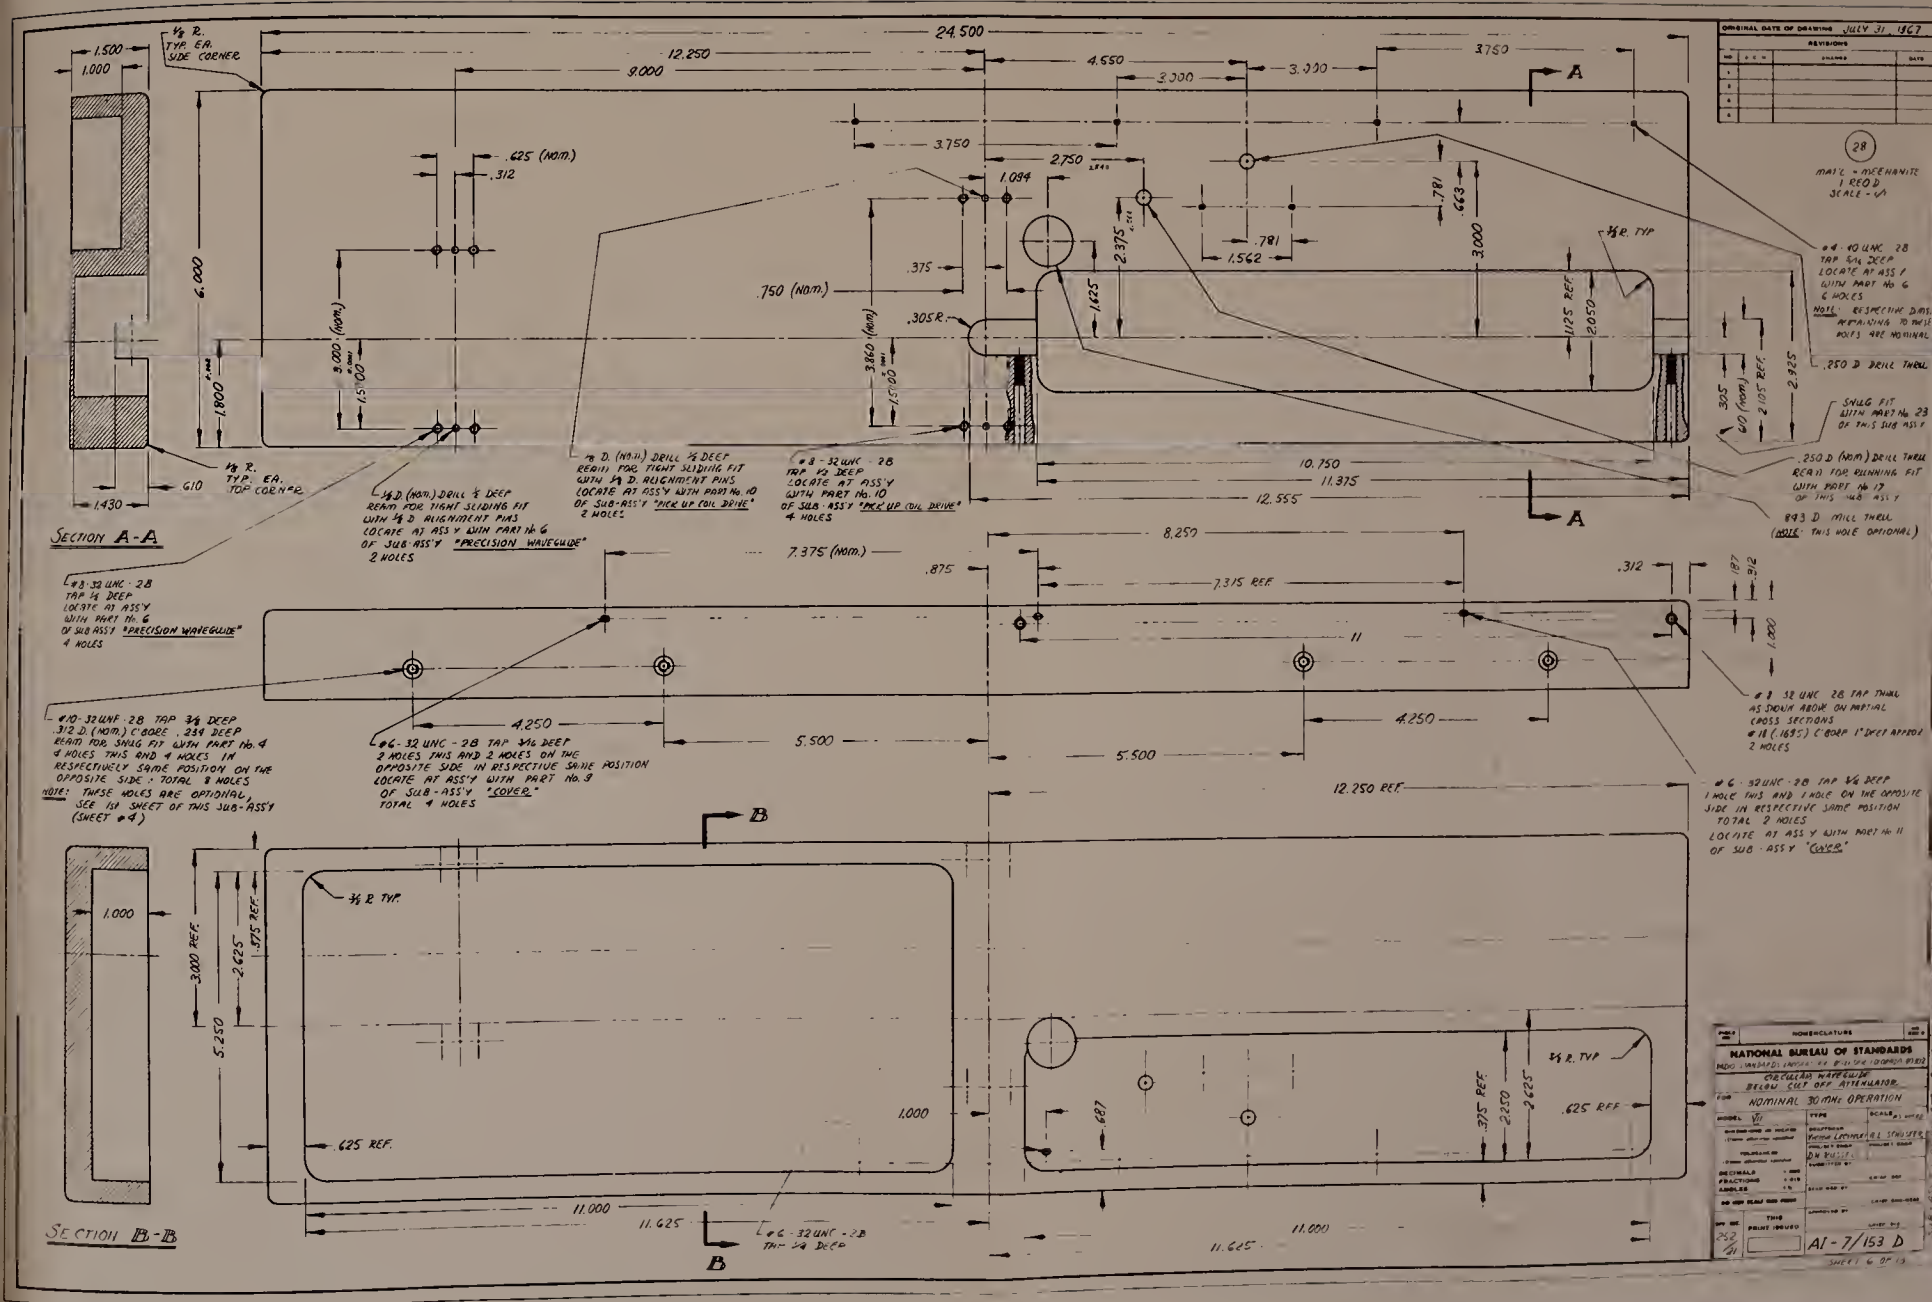
SECTION A-A
SECTION B-B
NATIONAL BUREAU OF STANDARDS
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
NOMINAL 30 MHz OPERATION
AI-7/153 D

Figure 27(g).

ORIGINAL DATE OF DRAWING JULY 31, 1967

REVISIONS			
NO	E C N	CHANGE	DATE
1			

SUB-ASS'Y: PICK UP COIL DRIVE

SCALE ~ 1/1

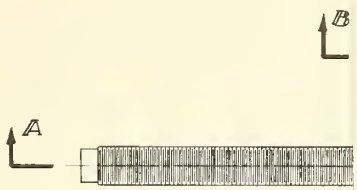

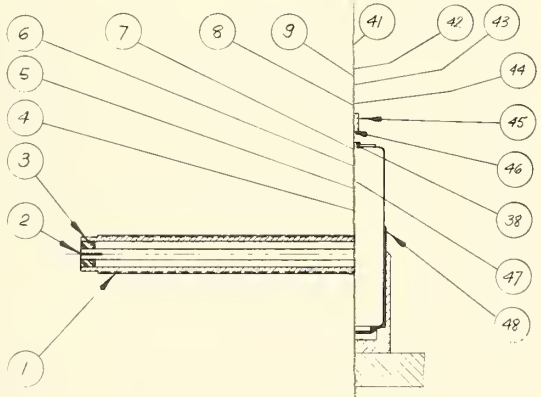

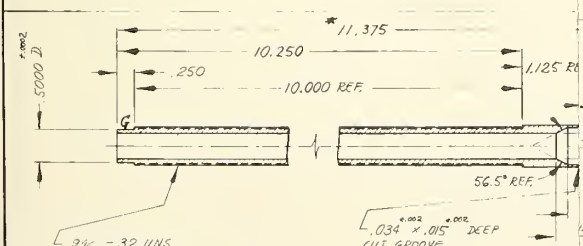



...NING TO ASS'Y OF PARTS No. 1, 2 AND 3
...No. 2 SHALL BE FLUSH TO .0005 BELOW
...OF PART No. 1 AT FINAL ASS'Y.
...REQUIREMENTS SEE INSTRUCTIONS
...TYPE 900-BT PRECISION

FABRIC...

* STOCK ITEMS

NO	NOMENCLATURE	NO REQ'D
50	TRIPPER, MICROSWITCH MAT'L ~ ALUMINUM	1
*49	TERMINAL STRIP 8 TBL 2-56 BINDING HD., .64 WIDE x .406 THICK	1
*48	MOTOR, EASTERN AIR DEVICES # P42 6DF-2	1
47	DRIVE WHEEL MAT'L ~ ALUMINUM 6061	1
*46	O-RING PARKER # 2-111	2
45	DIAL MAT'L ~ ALUMINUM 6061	1
44	KNOB INSULATOR MAT'L ~ NYLON	1
*43	STEEL SET SCREW # 4-40 UNC, 3/16 LONG, FLAT POINT	1
42	KNOB MAT'L ~ ALUMINUM 6061	1
*41	BEVEL GEAR BOSTON # G-48 1/2 Y-G	1
*40	STEEL KEY 1/16 x 1/16 x 3/4 LONG FLAT	1
*39	BEVEL GEAR BOSTON # G-48 1/2 Y-P	1
*38	STEEL SET SCREW, # 4-40 UNC, 1/2 LONG, CONE POINT	4
37	BRACKET MAT'L ~ ALUMINUM 6061	1
*36	BEARING, SLEEVE TYPE PLAIN BOSTON # B-96-5	1
35	SHAFT EXTENSION, COUNTER MAT'L ~ CRS	1
*34	BRASS SCREW, # 2-56 UNC, 5/16 LONG, ROUND HD.	2
33	INDEX PLATE MAT'L ~ ALUMINUM 6061	1
*32	BRASS SCREW, # 4-40 UNC. 1/4 LONG, FLAT HD	2
31	SHIMMY MAT'L ~ BRASS (OR COPPER)	2
*30	COUNTER KEEDER-ROOT # E 114235	1
29	COLLAR MAT'L ~ STEEL	1
28	BEARING, SLEEVE TYPE MAT'L ~ OILITE	1
27	DRIVE SHAFT MAT'L ~ STEEL	1
*26	STEEL KEY, 1/8 x 1/8 x 1/4 LONG	1
*25	HELICAL GEAR, BOSTON # H 2460 R	1
*24	HELICAL GEAR, BOSTON # H 2418 R	1
23	GEAR HOUSING MAT'L ~ ALUMINUM 6061	1
22	THRUST WASHER MAT'L ~ STEEL	1
*21	STEEL SCREW # 6-32 UNC, 1/2 LONG, HEX. SOCKET HD.	3
20	GUIDE MAT'L ~ TEENALITE	1
*19	STEEL SCREW, # 4-40 UNC 1/2 LONG HEX. SOCKET HD	4
*18	STEEL SCREW, HEX. SOCKET HD WITH HEX NUT # 10-32 UNF, 2" LONG	4
17	ANTI BACKLASH NUT MAT'L ~ BRASS	1
*16	STEEL SCREW, # 6-32 UNC, 3/4 LONG, HEX SOCKET HD	3
15	RETAINER RING MAT'L ~ ALUMINUM 6061	1
*14	BRASS SCREW, # 2-56 UNC. 5/8 LONG, FLAT HD	6
*13	STEEL SCREW, # 6-32 UNC 3/4 LONG, HEX. SOCKET HD.	2
*12	ALIGNMENT PIN MAT'L ~ .1250 D. DRILL ROD, 1" LG.	2
*11	STEEL SCREW, # 8-32 UNC 3/4 LONG, HEX. SOCKET HD	4
10	BEARING HOUSING MAT'L ~ ALUMINUM 6061	1
9	SPACER MAT'L ~ BRASS	1
*8	SINGLE ROW, ANGULAR CONTACT BEARING, NO # 202-9 (15mm BORE, .6535 O.D., 47mm)	2
7	RETAINER, NUT MAT'L ~ BRASS	1
*6	STEEL SET SCREW, # 4-40 UNC 3/16 LONG CONE POINT	2
5	WIPER MAT'L ~ FELT, 1/8 THICK	2
4	THRUST NUT MAT'L ~ PHOSPHOR BRONZE	1
3	DIELECTRIC SPACER MAT'L ~ REXOLITE	3
2	CENTER CONDUCTOR MAT'L ~ BRASS	1
1	MOTION TRANSLATING SCREW MAT'L ~ SB-60 RC STEEL	1

LIST OF PARTS

NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302

CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR

FOR Nominal 30 mHz OPERATION

MODEL #1 | TYPE | SCALE AS NOTED

DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± 1/16
ANGLES ± 1/4°
DO NOT SCALE THIS PRINT

DRAFTSMAN: Victor Lechniki
PROJECT ENGR: D.N. RALSTELL
SUBMITTED BY: A.L. SCHLUSTER
PROJECT ENGR
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.

DFY. SEC. 252/21 | THIS PRINT ISSUED

AI-7/153 D

SUB ASS'Y: PICK UP COIL DRIVE (SHEETS # 7 & 8 AND 8 & 9)

SHEET 7 OF 13

Figure 27(h).

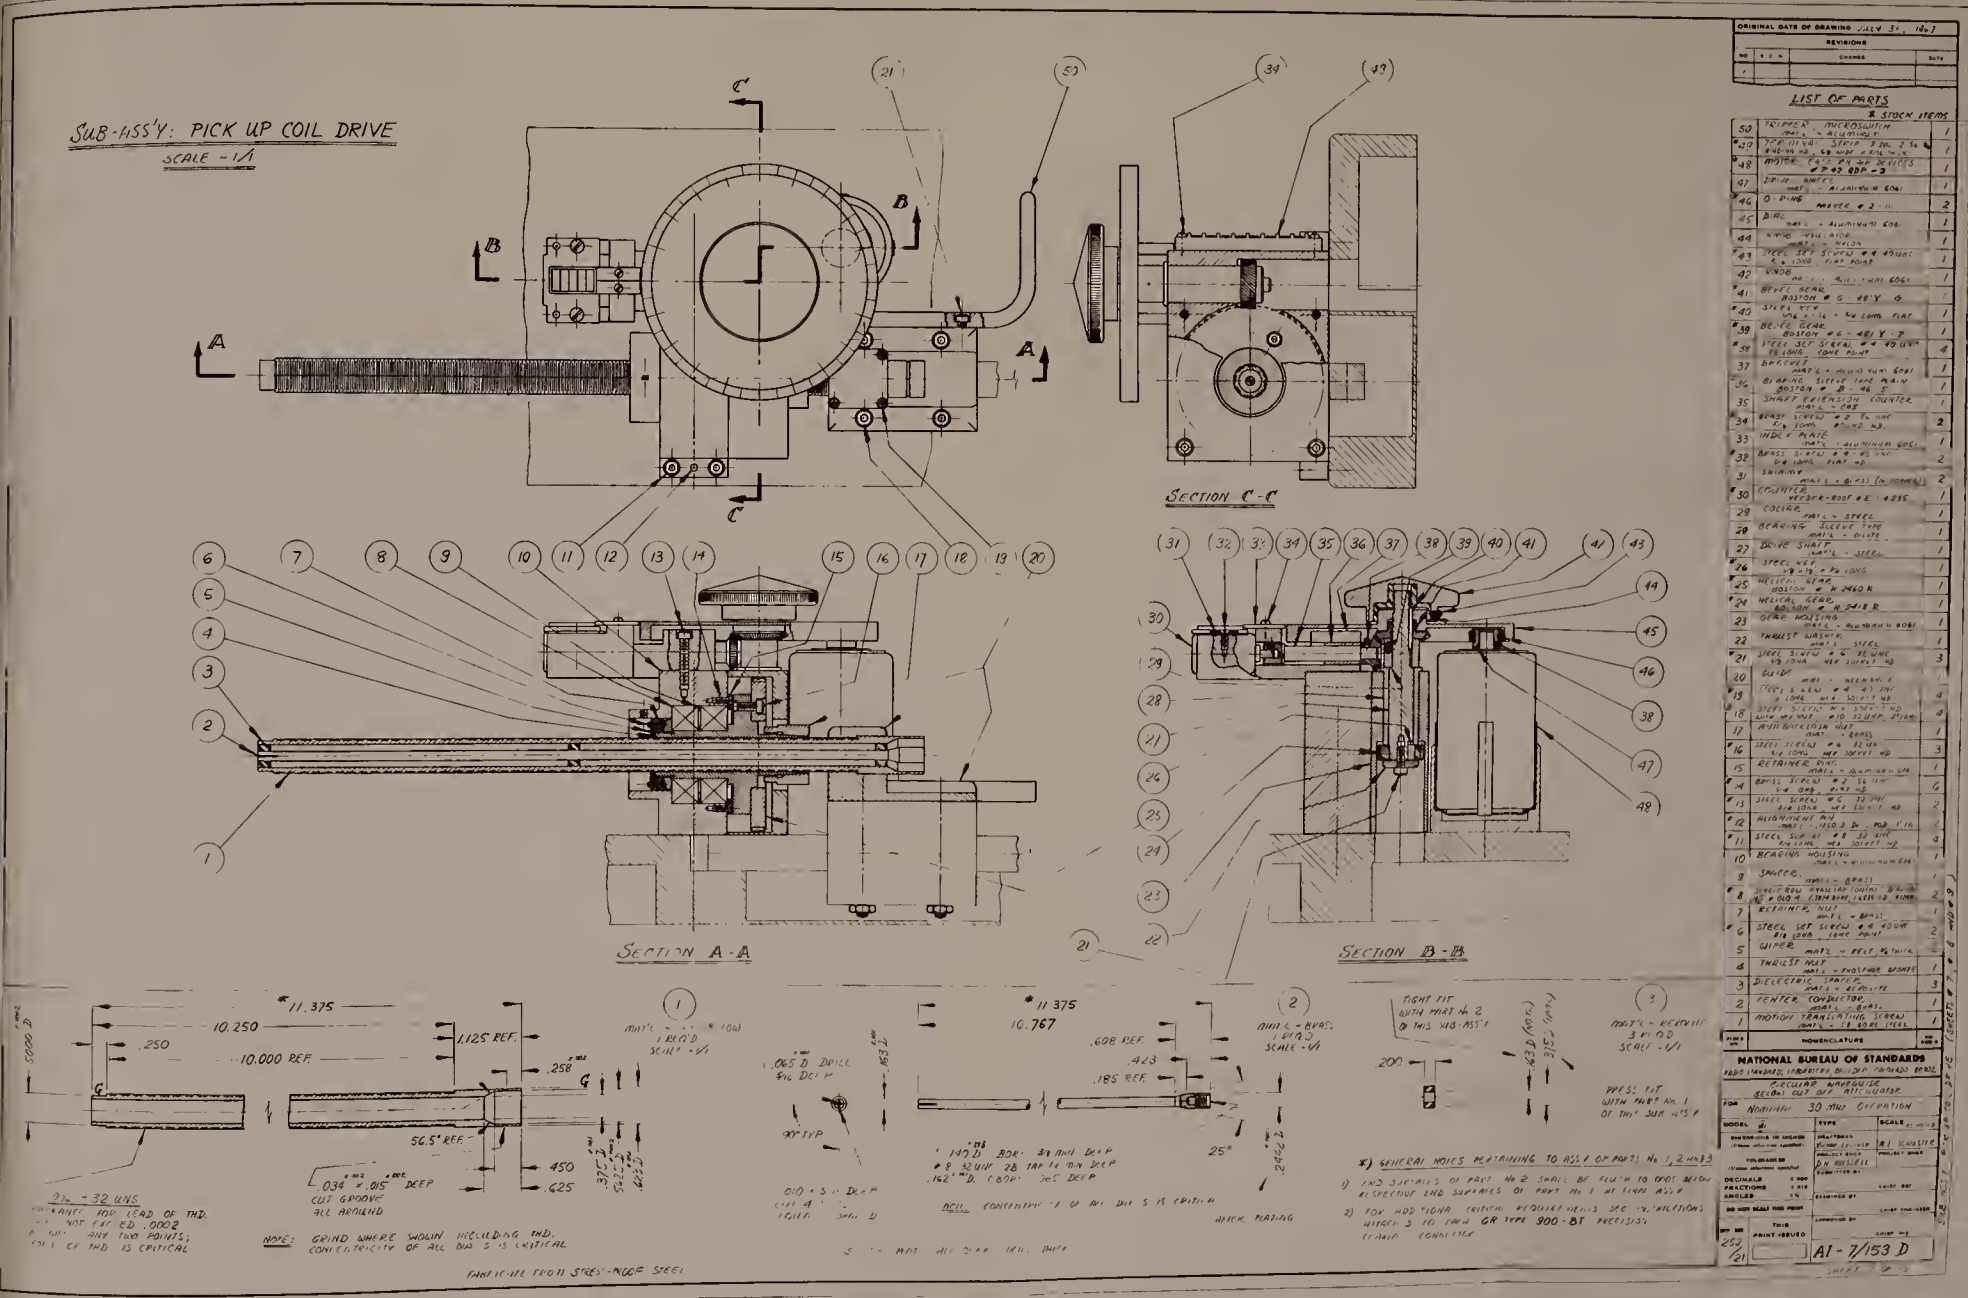
SUB-ASS'Y: PICK UP COIL DRIVE
SCALE - 1/1
SECTION A-A
SECTION B-B
SECTION C-C
LIST OF PARTS
NATIONAL BUREAU OF STANDARDS
CIRCULAR WAVEGUIDE
NOMINAL 30 MM OPERATION
A1 - 7/153 D

Figure 27(h).

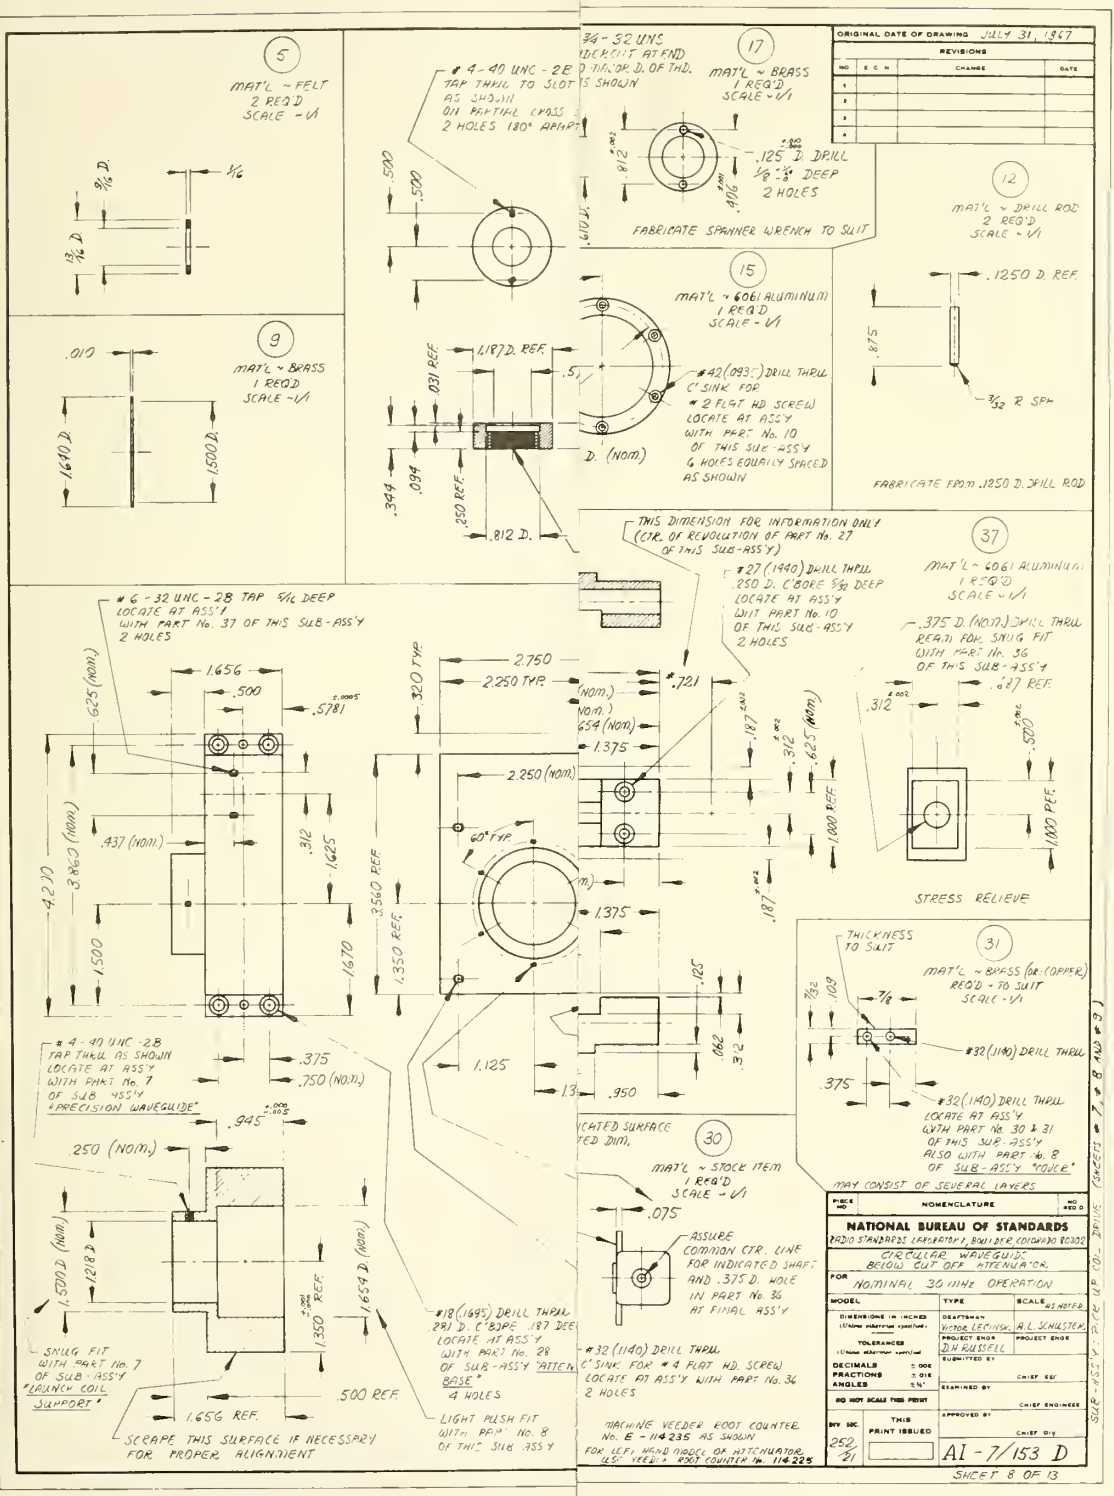
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO | E C N | CHANGE | DATE
5
MAT'L ~ FELT
2 REQ'D
SCALE ~ 1/1
9
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 1/1
17
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 1/1
FABRICATE SPANNER WRENCH TO SUIT
12
MAT'L ~ DRILL ROD
2 REQ'D
SCALE ~ 1/1
FABRICATE FROM .1250 D. DRILL ROD
15
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
THIS DIMENSION FOR INFORMATION ONLY (CTR. OF REVOLUTION OF PART No. 27 OF THIS SUB-ASS'Y)
37
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
STRESS RELIEVE
31
MAT'L ~ BRASS (OR COPPER)
REQ'D ~ TO SUIT
SCALE ~ 1/1
MAY CONSIST OF SEVERAL LAYERS
30
MAT'L ~ STOCK ITEM
1 REQ'D
SCALE ~ 1/1
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER COLORADO 80302
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MHz OPERATION
DRAWN BY: VICTOR LECHNER, A.L. SCHULSTER
PROJECT ENGR: D.H. RUSSELL
SUBMITTED BY
CHIEF, EE
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF, DIV.
DIV. SEC. 252.21
THIS PRINT ISSUED
A1 - 7/153 D
SHEET 8 OF 13
SUB-ASS'Y - PICK UP COIL DRIVE (SHEETS # 7, 8 AND # 9)

Figure 27(i).

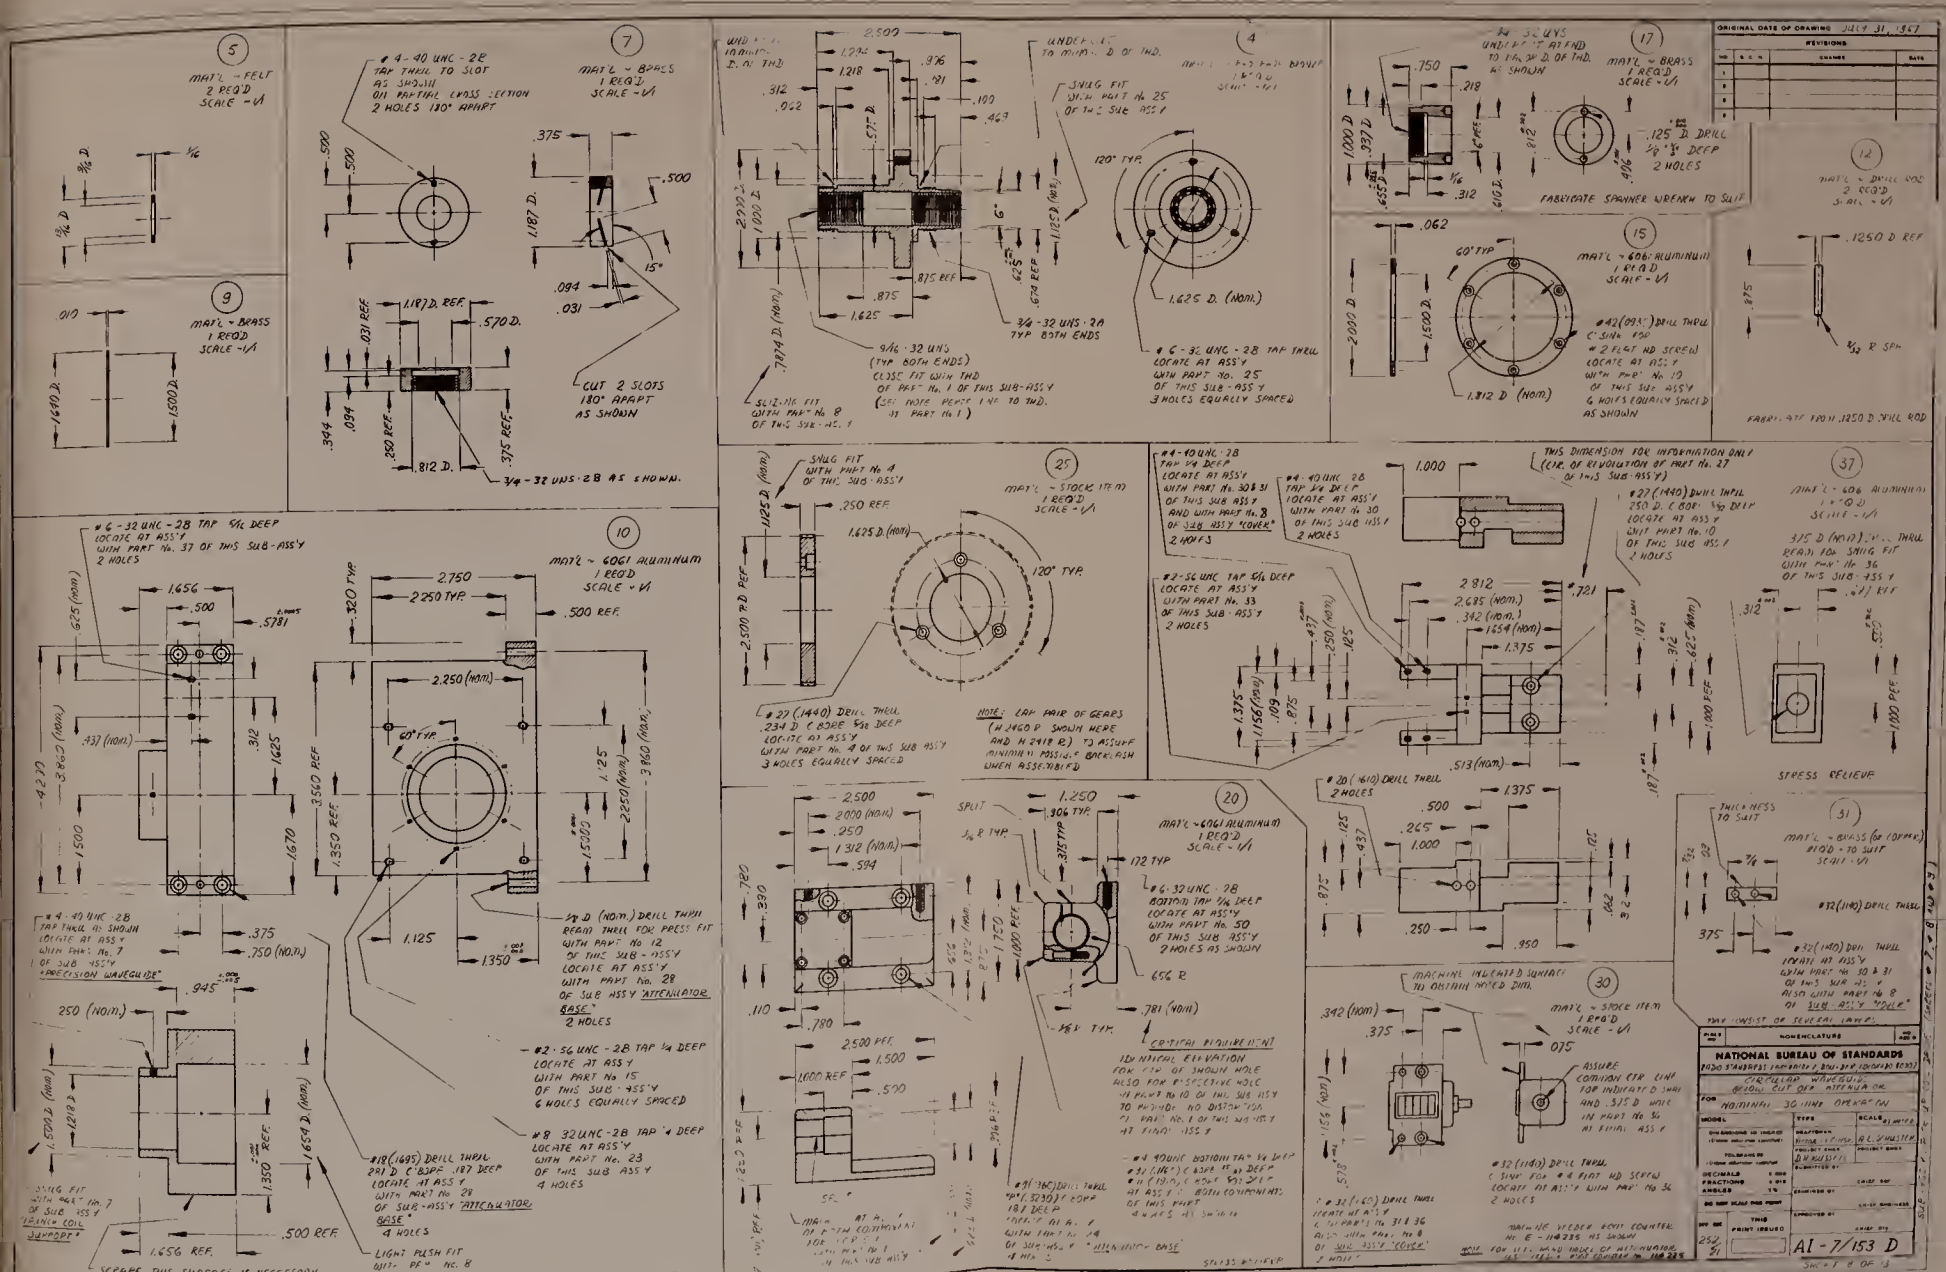
NATIONAL BUREAU OF STANDARDS
CIRCULAR WAVEGUIDE
SECTION CUT OFF ATTENUATOR
FOR
NOMINAL 3G LINE OPERATION
AI-7/153 D

Figure 27(i).

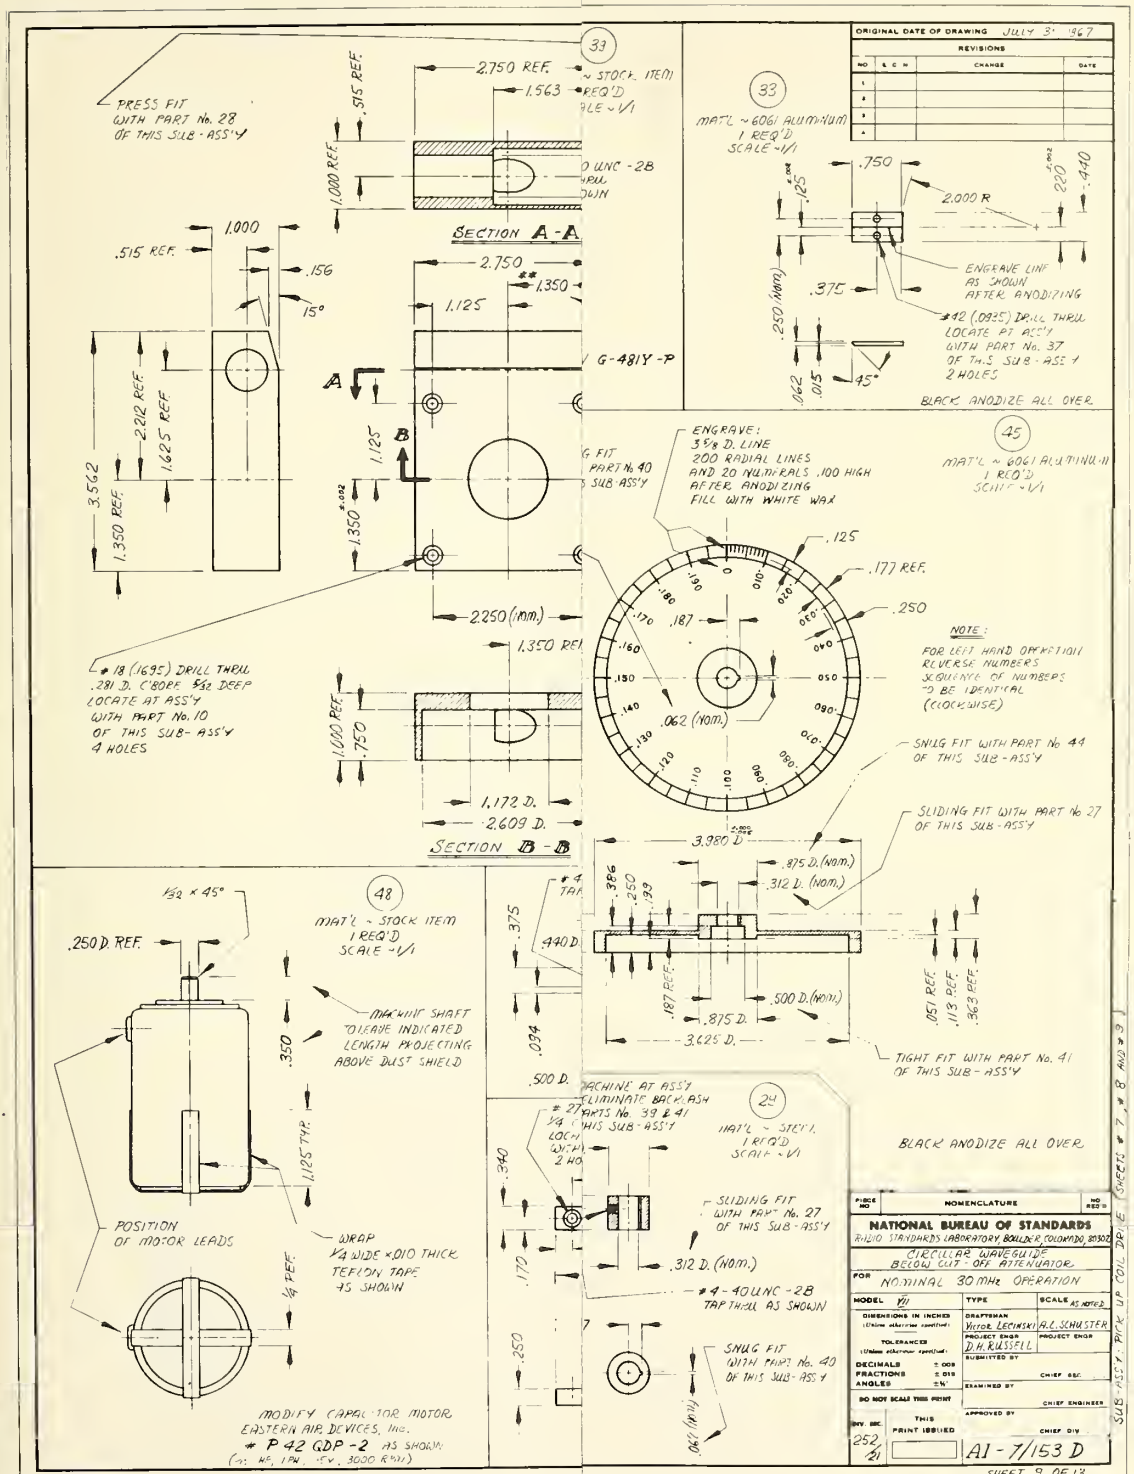
ORIGINAL DATE OF DRAWING JULY 3, 1967
REVISIONS
NO. | E C N | CHANGE | DATE
PRESS FIT WITH PART No. 28 OF THIS SUB-ASS'Y
SECTION A-A
SECTION B-B
2.750 REF.
1.563
.515 REF.
1.000 REF.
1.000
.156
15°
2.212 REF.
1.625 REF.
3.562
1.350 REF.
1.125
1.350
2.250 (nom.)
1.172 D.
2.609 D.
.750
#18 (.1695) DRILL THRU .281 D. C'BORE .532 DEEP LOCATE AT ASS'Y WITH PART No. 10 OF THIS SUB-ASS'Y 4 HOLES
33
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
.750
.125
2.000 R
.220
.440
.375
.250 (NOM.)
ENGRAVE LINE AS SHOWN AFTER ANODIZING
#42 (.0935) DRILL THRU LOCATE AT ASS'Y WITH PART No. 37 OF THIS SUB-ASS'Y 2 HOLES
.062
.015
45°
BLACK ANODIZE ALL OVER.
45
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
ENGRAVE:
3 5/8 D. LINE
200 RADIAL LINES
AND 20 NUMERALS .100 HIGH
AFTER ANODIZING
FILL WITH WHITE WAX
.125
.177 REF.
.250
.187
.062 (NOM.)
NOTE:
FOR LEFT HAND OPERATION REVERSE NUMBERS SEQUENCE OF NUMBERS TO BE IDENTICAL (CLOCKWISE)
SNUG FIT WITH PART No. 44 OF THIS SUB-ASS'Y
SLIDING FIT WITH PART No. 27 OF THIS SUB-ASS'Y
3.980 D.
.875 D. (NOM.)
.312 D. (NOM.)
.386
.250
.193
.187 REF.
.500 D. (NOM.)
.875 D.
3.625 D.
.051 REF.
.113 REF.
.363 REF.
TIGHT FIT WITH PART No. 41 OF THIS SUB-ASS'Y
1/32 x 45°
.250 D. REF.
48
MAT'L ~ STOCK ITEM
1 REQ'D
SCALE ~ 1/1
MACHINE SHAFT TO LEAVE INDICATED LENGTH PROJECTING ABOVE DUST SHIELD
.350
1.125 TYP.
POSITION OF MOTOR LEADS
WRAP 1/4 WIDE x .010 THICK TEFLON TAPE AS SHOWN
1/4 REF.
MODIFY CAPACITOR MOTOR EASTERN AIR DEVICES, Inc. # P 42 GDP-2 AS SHOWN (~ HP, 1PH, 1CY, 3000 RPM)
.375
.440 D.
.034
.500 D.
MACHINE AT ASS'Y TO ELIMINATE BACKLASH
27 PARTS No. 39 & 41 1/4 THIS SUB-ASS'Y LOCK WITH 2 HO
24
MAT'L ~ STEEL
1 REQ'D
SCALE ~ 1/1
.340
.170
.250
.062 (NOM.)
SLIDING FIT WITH PART No. 27 OF THIS SUB-ASS'Y
.312 D. (NOM.)
#4-40 UNC-2B TAP THRU AS SHOWN
SNUG FIT WITH PART No. 40 OF THIS SUB-ASS'Y
BLACK ANODIZE ALL OVER.
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
CIRCULAR WAVEGUIDE BELOW CUT-OFF ATTENUATOR
FOR NOMINAL 30 MHz OPERATION
MODEL VII
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± .015
ANGLES ± ½°
DO NOT SCALE THIS PRINT
DRAFTSMAN VICTOR LECHNSKI
A.L. SCHUSTER
PROJECT ENGR
D.H. RUSSELL
PROJECT ENGR
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIV. SEC. 252.21
THIS PRINT ISSUED
A1-7/153 D
SHEET 9 OF 13
SUB-ASS'Y PICK UP COIL DRIVE (SHEET # 7 & 8 AND # 9)

Figure 27(i).

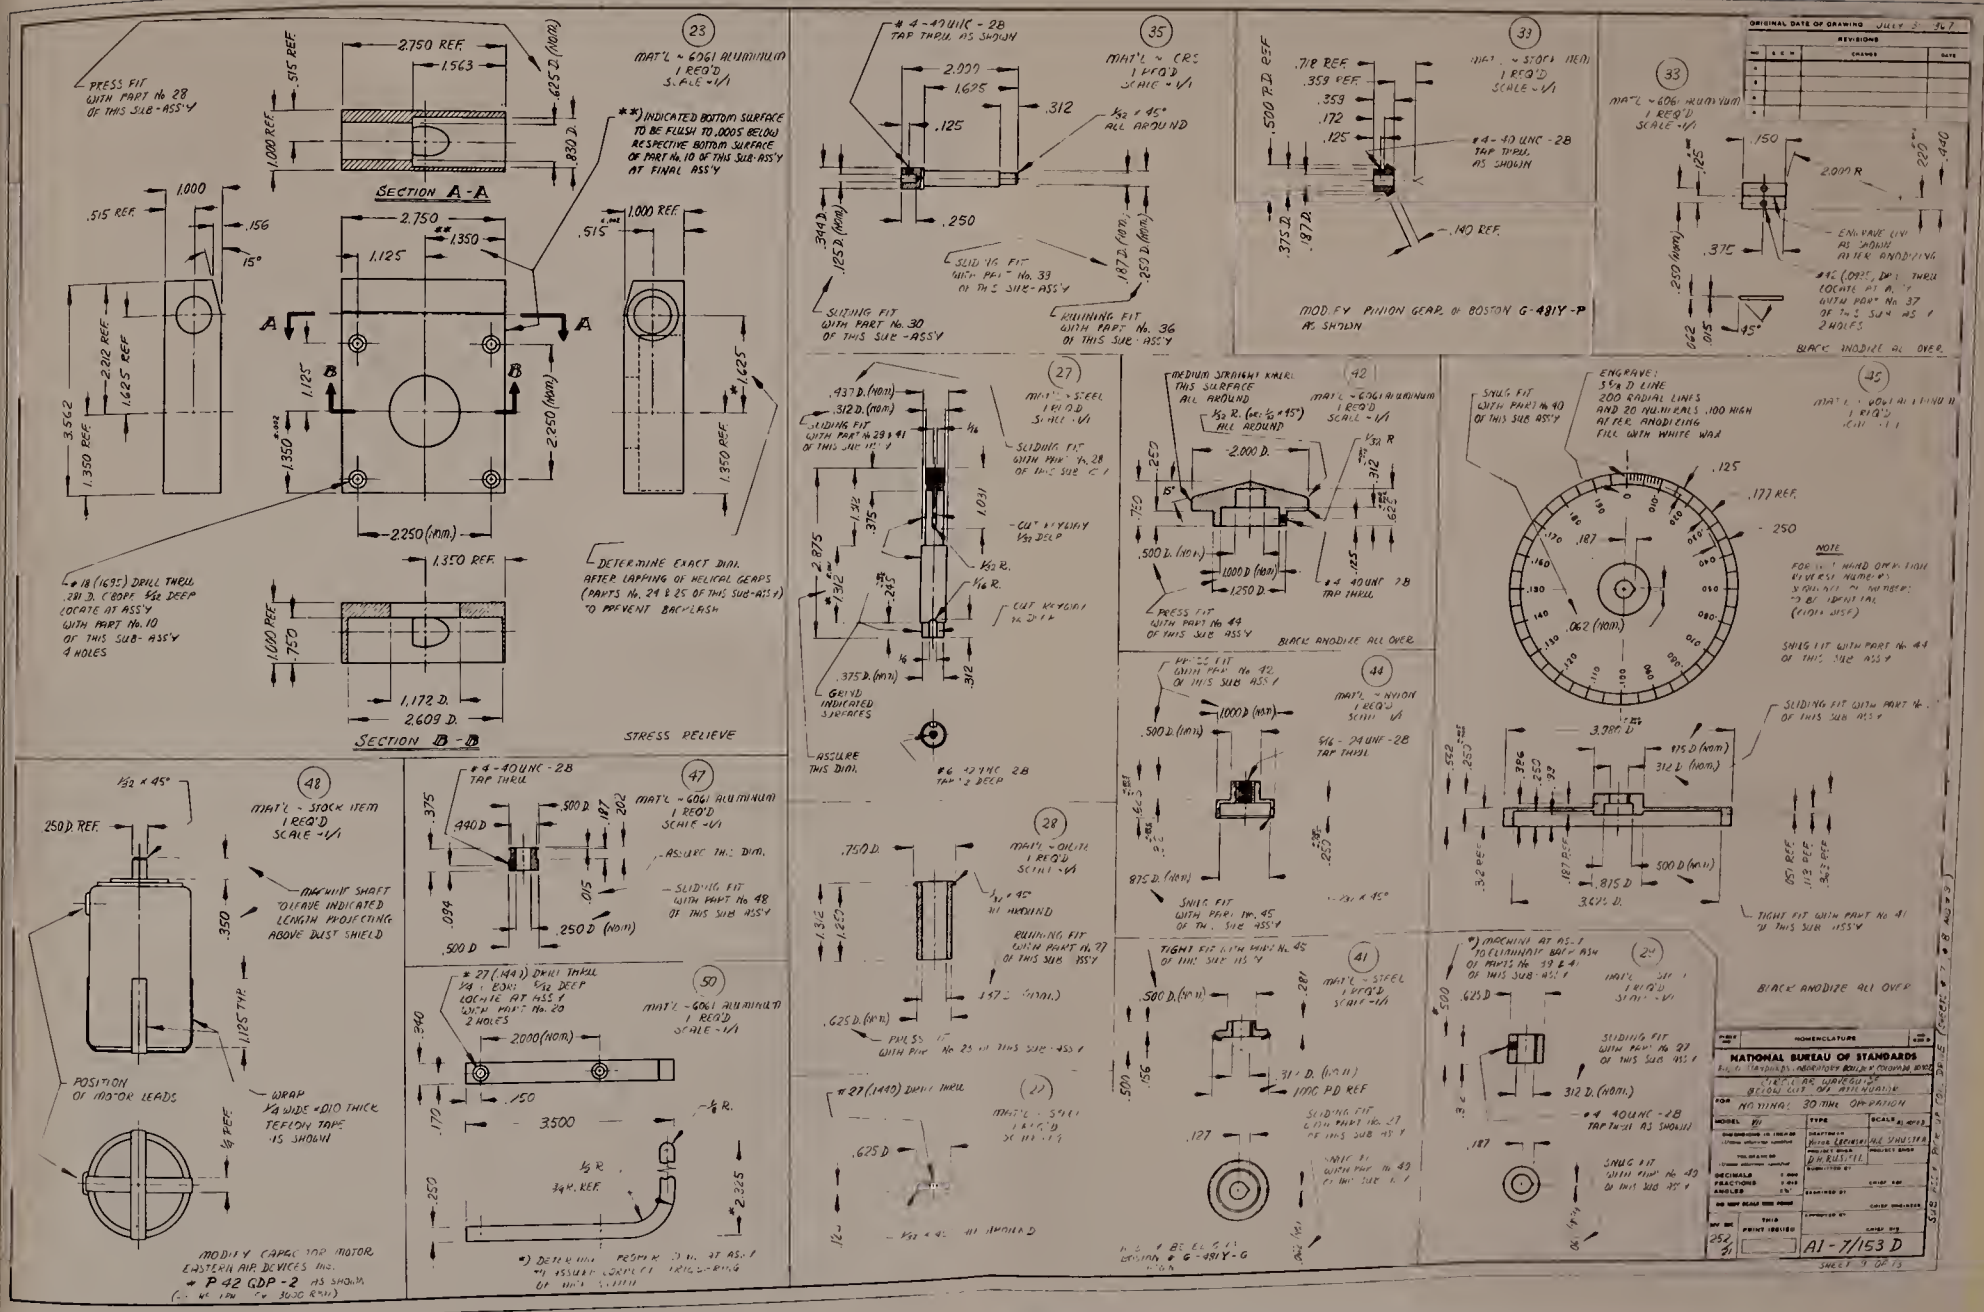
SECTION A-A
SECTION B-B
STRESS RELIEVE
MODIFY PINION GEAR OF BOSTON G-481Y-P AS SHOWN
NATIONAL BUREAU OF STANDARDS
A1-7/153 D

Figure 27(i).

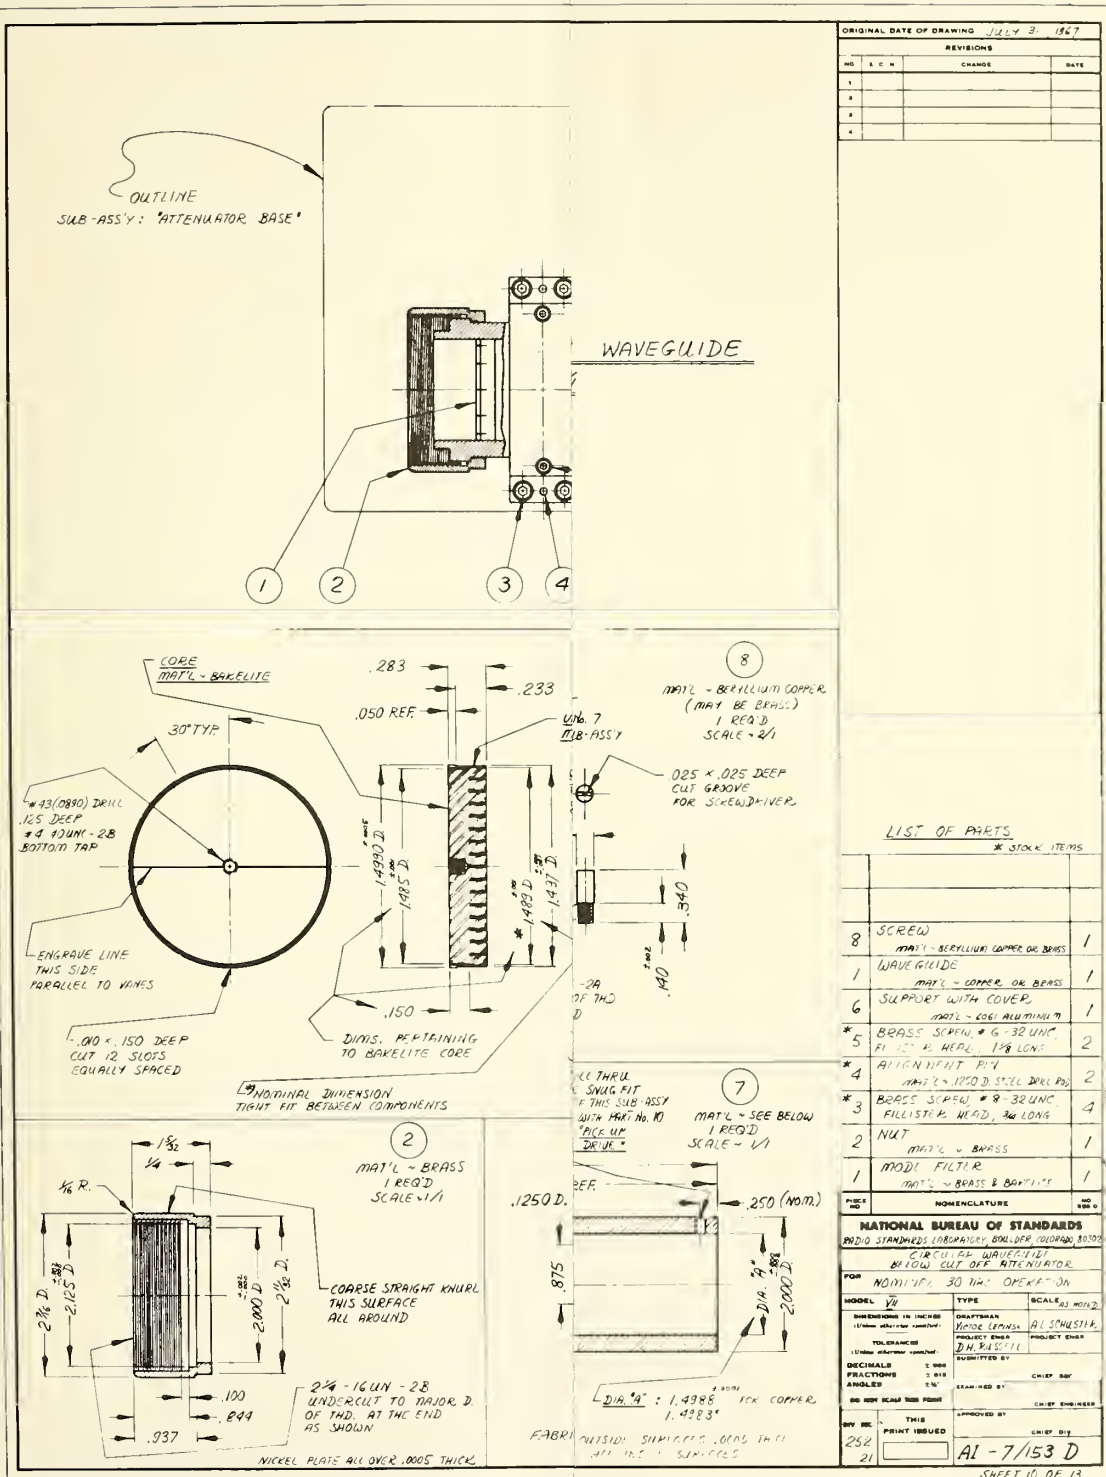
ORIGINAL DATE OF DRAWING JULY 3, 1947
REVISIONS
NO. & C.N. CHANGE DATE
OUTLINE
SUB-ASS'Y: "ATTENUATOR BASE"
WAVEGUIDE
1
2
3
4
CORE
MAT'L - BAKELITE
30° TYP.
#43(0890) DRILL
.125 DEEP
#4-40 UNC-2B
BOTTOM TAP
ENGRAVE LINE
THIS SIDE
PARALLEL TO VANES
.010 × .150 DEEP
CUT 12 SLOTS
EQUALLY SPACED
.283
.233
.050 REF.
Unit No. 7
SUB-ASS'Y
.025 × .025 DEEP
CUT GROOVE
FOR SCREWDRIVER
1.4930 D
1.495 D
1.4993 D
1.437 D
.340
.140
.150
DIMS. PERTAINING
TO BAKELITE CORE
-2A
OF THD
D
NOMINAL DIMENSION
TIGHT FIT BETWEEN COMPONENTS
8
MAT'L - BERYLLIUM COPPER
(MAY BE BRASS)
1 REQ'D
SCALE - 2/1
LIST OF PARTS
* STOCK ITEMS
8 SCREW MAT'L - BERYLLIUM COPPER OR BRASS 1
1 WAVEGUIDE MAT'L - COPPER OR BRASS 1
6 SUPPORT WITH COVER MAT'L - 6061 ALUMINUM 1
*5 BRASS SCREW #6-32 UNC FILLISTER HEAD, 1/8 LONG 2
*4 ALIGNMENT PIN MAT'L - .1250 D. STEEL DRILL ROD 2
*3 BRASS SCREW #8-32 UNC FILLISTER HEAD, 3/4 LONG 4
2 NUT MAT'L - BRASS 1
1 MOD I FILTER MAT'L - BRASS & BAFFLES 1
PIECE NO. NOMENCLATURE NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO
CIRCULAR WAVEGUIDE
BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MM OPERATION
MODEL VII
TYPE
SCALE AS NOTED
DRAFTSMAN Victor Lemmon
PROJECT ENGR D.H. Ballou
SUBMITTED BY
CHIEF DIV.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIV. SEC. 252.21
THIS PRINT ISSUED
AI-7/153 D
SHEET 10 OF 13
2
MAT'L - BRASS
1 REQ'D
SCALE - 1/1
1/8 R.
1/32
1/4
2 5/16 D
2.125 D
2.000 D
2 1/2 D
COARSE STRAIGHT KNURL
THIS SURFACE
ALL AROUND
.100
.844
.937
2 1/4 - 16 UN - 2B
UNDERCUT TO MAJOR D.
OF THD. AT THE END
AS SHOWN
NICKEL PLATE ALL OVER .0005 THICK
7
MAT'L - SEE BELOW
1 REQ'D
SCALE - 1/1
.1250 D.
.250 (NOM.)
.875
DIA. "A" : 1.4988 1.4983 FOR COPPER
FABRI
OUTSIDE SURFACES .0015 THICK
ALL OTHER SURFACES
SEE ALSO PRECISION WAVEGUIDE (SHEET # 10)

Figure 27(k).

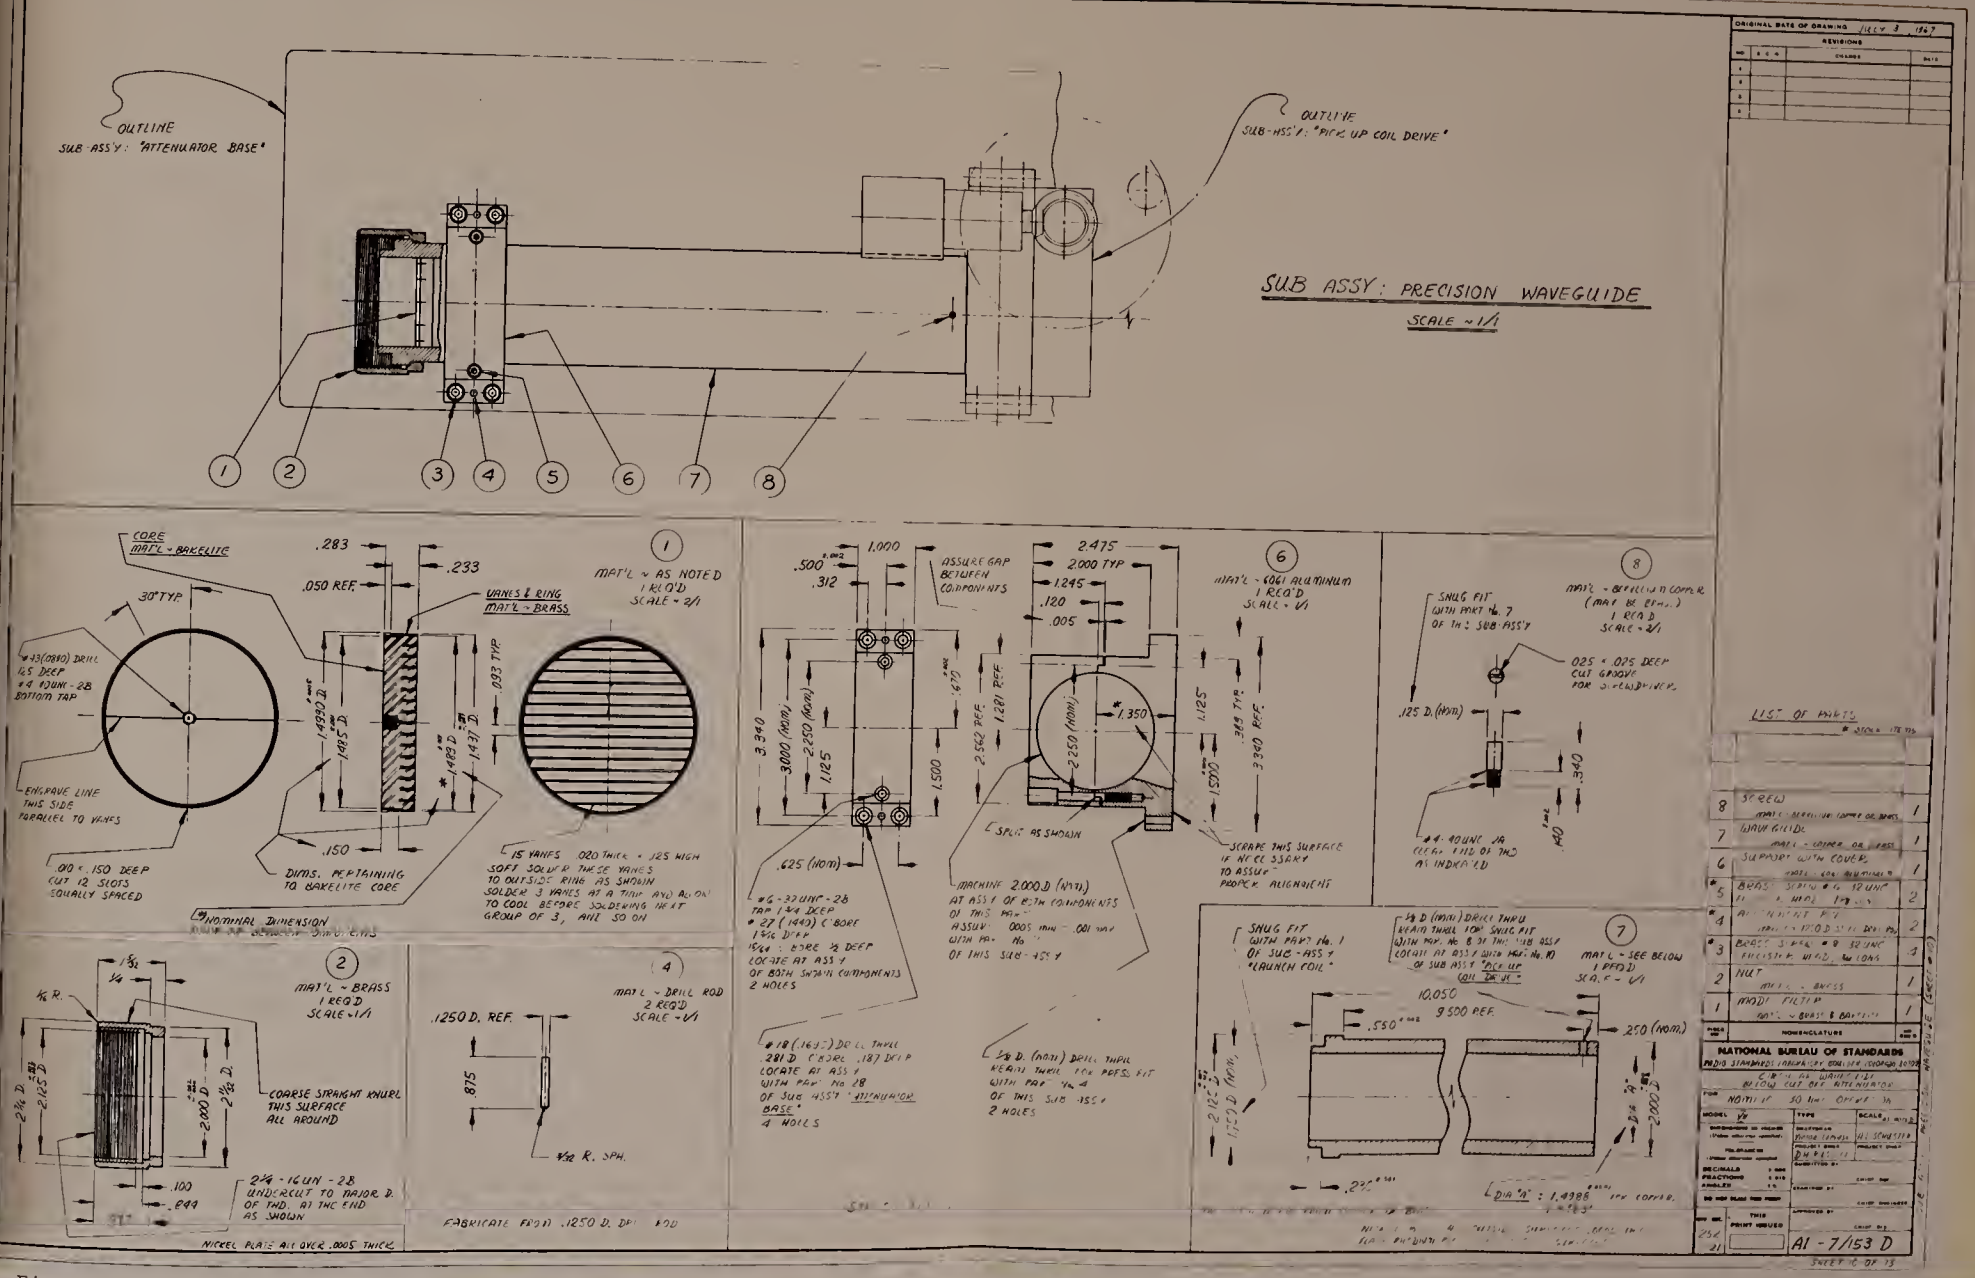
OUTLINE
SUB-ASS'Y: "ATTENUATOR BASE"
OUTLINE
SUB-ASS'Y: "PICK UP COIL DRIVE"
SUB ASSY: PRECISION WAVEGUIDE
SCALE ~ 1/1
1
2
3
4
5
6
7
8
CORE
MAT'L ~ BAKELITE
VANES & RING
MAT'L ~ BRASS
30° TYP.
.283
.233
.050 REF.
.033 TYP
.150
.090 x .150 DEEP
CUT 12 SLOTS
EQUALLY SPACED
ENGRAVE LINE
THIS SIDE
PARALLEL TO VANES
DIMS. PERTAINING
TO BAKELITE CORE
15 VANES .020 THICK x .125 HIGH
SOLDER THESE VANES
TO OUTSIDE RING AS SHOWN
SOLDER 3 VANES AT A TIME AND ALLOW
TO COOL BEFORE SOLDERING NEXT
GROUP OF 3, AND SO ON
MAT'L ~ AS NOTED
1 REQ'D
SCALE ~ 2/1
MAT'L ~ BRASS
1 REQ'D
SCALE ~ 1/1
COARSE STRAIGHT KNURL
THIS SURFACE
ALL AROUND
2¼ - 16 UN - 2B
UNDERCUT TO MAJOR D.
OF THD. AT THIS END
AS SHOWN
NICKEL PLATE ALL OVER .0005 THICK
MAT'L ~ DRILL ROD
2 REQ'D
SCALE ~ 1/1
.1250 D. REF.
.875
FABRICATE FROM .1250 D. DRILL ROD
ASSURE GAP
BETWEEN
COMPONENTS
SPLIT AS SHOWN
MACHINE 2.000 D (NOM.)
AT ASS'Y OF BOTH COMPONENTS
OF THIS PART
ASSURE .0005 min - .001 max
WITH PART No.
OF THIS SUB-ASS'Y
#6-32 UNC-2B
TAP 1.44 DEEP
#27 (.1440) C'BORE
.156 DEEP
15/64 - BORE ½ DEEP
LOCATE AT ASS'Y
OF BOTH SWAIN COMPONENTS
2 HOLES
#18 (.1695) DRILL THRU
.281 D C'BORE .187 DEEP
LOCATE AT ASS'Y
WITH PART No 28
OF SUB ASS'Y "ATTENUATOR BASE"
4 HOLES
⅜ D. (NOM.) DRILL THRU
REAM THRU FOR PRESS FIT
WITH PART No. 4
OF THIS SUB-ASS'Y
2 HOLES
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
SCRAPE THIS SURFACE
IF NEED ASSY'Y
TO ASSURE
PROPER ALIGNMENT
SNUG FIT
WITH PART No. 7
OF THIS SUB-ASS'Y
.025 x .025 DEEP
CUT GROOVE
FOR SCREWDRIVER
#4-40 UNC-2A
CLEAR END OF THD
AS INDICATED
MAT'L ~ BERYLLIUM COPPER
(MAY BE BRASS)
1 REQ'D
SCALE ~ 2/1
SNUG FIT
WITH PART No. 1
OF SUB-ASS'Y
"LAUNCH COIL"
⅜ D (NOM.) DRILL THRU
REAM THRU FOR SNUG FIT
WITH PART No. B 31 THIS SUB ASS'Y
LOCATE AT ASS'Y WITH PART No. 10
OF SUB ASS'Y "PICK UP
COIL DRIVE"
MAT'L ~ SEE BELOW
1 REQ'D
SCALE ~ 1/1
10.050
9.500 REF.
.550
.250 (NOM.)
DIA "A" : 1.4988
LIST OF PARTS
8 SCREW
7 WAVE GUIDE
6 SUPPORT WITH COVER
5 BRASS
4 ALUMINUM PLATE
3 BRASS
2 NUT
1 WASHER
NATIONAL BUREAU OF STANDARDS
NOMENCLATURE
MODEL VR
TYPE
SCALE
AI-7/153 D

Figure 27(k).

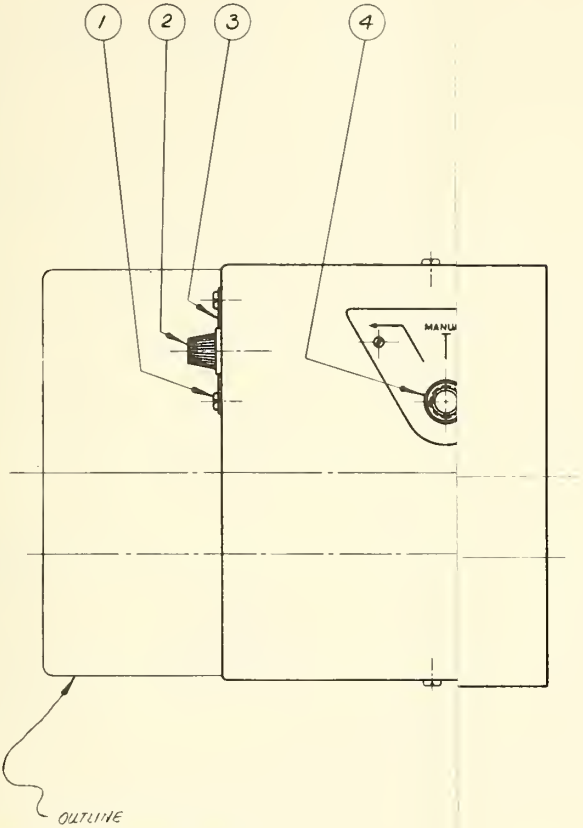

ORIGINAL DATE OF DRAWING July 31 1967

REVISIONS

NO	L C N	CHANGE	DATE
1			
2			
3			
4			

LIST OF PARTS

* STOCK ITEMS

PIECE NO	NOMENCLATURE	NO REQ'D
11	COVER, TRANSPARENT SECTION mat'l ~ LUCITE 1/8 THICK	1
10	SPACER mat'l ~ FELT 1/16 THICK	1
9	COVER, mat'l ~ 52 S ALUMINUM .081 THICK	1
8	ESCUTCHEON mat'l ~ 6061 ALUMINUM 1/16 THICK	1
*7	BRASS SCREW, #4 40 UNC, BINDING HEAD, 3/8 LONG	2
*6	BRASS SCREW, #2 - 56 UNC ROUND HEAD 3/16 LONG	6
5	INDICATOR PLATE mat'l ~ 6061 ALUMINUM	1
*4	DIRECTIONAL SWITCH 2 SWITCHES SWITCHCRAFT # 3006 SW	1
*3	PLUG, 2 POLE INSERT W/GROUND 125 V, 15 AMP	1
*2	LITTELFUSE 3AG, 3/4 A FUSE W/FUSE MOUNT TYPE 342001	1
*1	BRASS SCREW, #6 - 32 UNC BINDING HEAD, 1/4 LONG	2

NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302

CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR

FOR NOMINAL 30 MHz OPERATION

MODEL	TYPE	SCALE
VII		AS NOTED

DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± 1/32
ANGLES ± 1/4°
DO NOT SCALE THIS PRINT

DRAFTSMAN: VICTOR LEPINSKI
PROJECT ENGR: D.H. RUSSELL
PROJECT ENGR: A.L. SCHUSTER
SUBMITTED BY: CHIEF SEC
EXAMINED BY: CHIEF ENGINEER
APPROVED BY: CHIEF DIV

DIV. SEC.	THIS PRINT ISSUED
252 21	

AI - 7/153 D

SUB-ASS'Y - COVER (SHEETS # 11, # 12 AND # 13)

SHEET 11 OF 13

Figure 27(1).

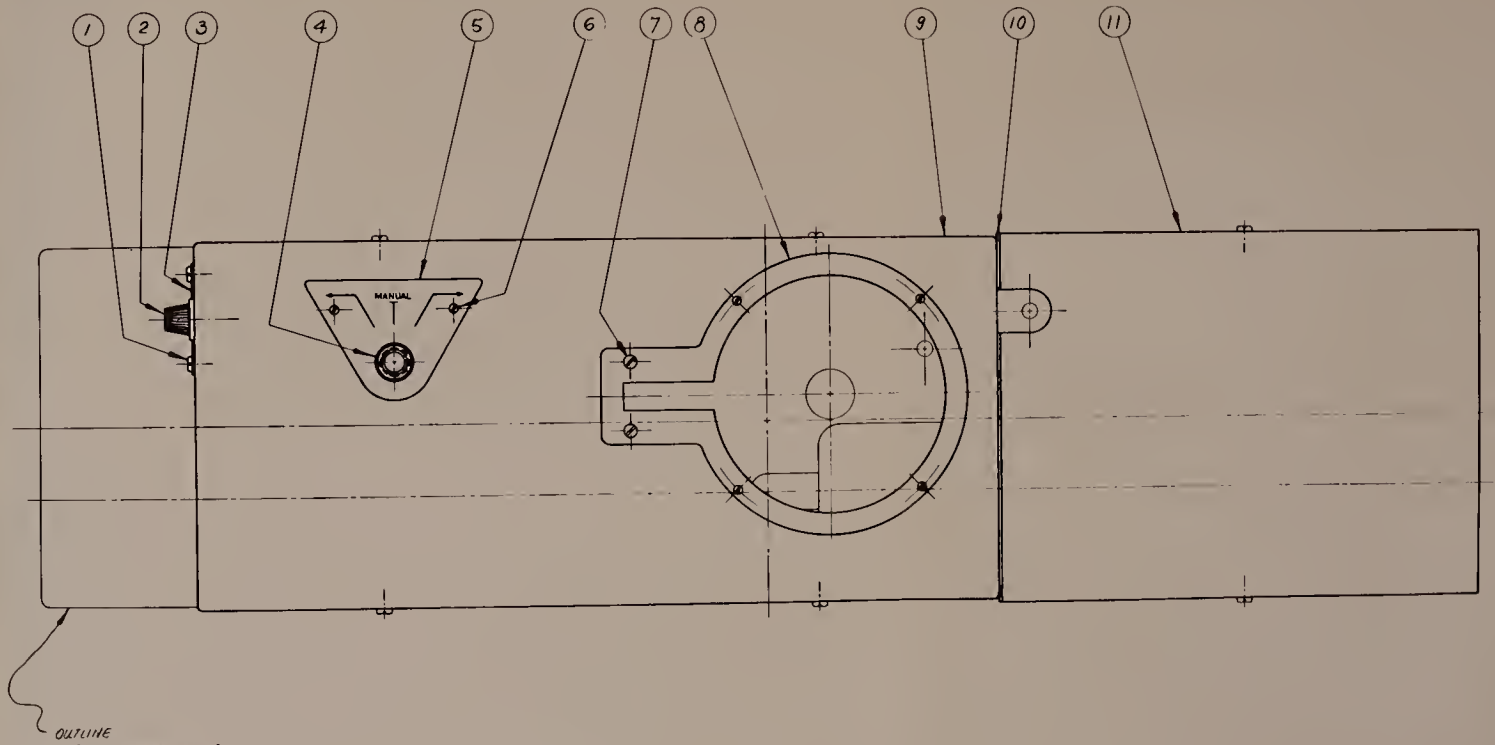

SUB-ASS'Y : COVER

SCALE ~ 1/1

ORIGINAL DATE OF DRAWING JULY 31 1967

REVISIONS

NO.	ZONE	CHANGE	DATE
1			
2			
3			
4			
5			

LIST OF PARTS

ITEM NO.	NOMENCLATURE	QUAN.
11	COVER TRANSPARENT SECTION MAT'L ~ LUCITE 3/8 THICK	1
10	SPACER MAT'L ~ FELT 1/8 THICK	1
9	COVER MAT'L ~ 52 S ALUMINUM .081 THICK	1
8	ESCUTCHEON MAT'L ~ 6061 ALUMINUM 1/16 THICK	1
*7	BRASS SCREW, #4 32 UNC, BINDING HEAD, 3/8 LONG	2
*6	BRASS SCREW #2 56 UNC ROUND HEAD 1/4 LONG	6
5	INDICATOR PLATE MAT'L ~ 6061 ALUMINUM	1
*4	DIRECTIONAL SWITCH CENTRALAB SWITCH PART # 3006 SW	1
*3	PLUG, 2 POLE INSERT W/GROUND 125 V., 15 AMP	1
*2	LITTELFUSE 3AG, 1/16 A FUSE W/FUSE MOUNT TYPE 342001	1
*1	BRASS SCREW, #6 32 UNC BINDING HEAD 3/8 LONG	2

NOMENCLATURE

NATIONAL BUREAU OF STANDARDS
RADIO ENGINEERING LABORATORY, BOULDER LABORATORIES, BOULDER

FOR: ATTENUATOR WAVEGUIDE BELOW CUT-OFF ATTENUATOR
MINIMAL 30 MHz OPERATION

MODEL	89
TYPE	WAVEGUIDE VARIABLE ATTENUATOR
SCALE	AS NOTED
DRAWN BY	A.L. SCHUSTER
PROJECT ENGR.	DAN RUTTER
DECIMALS	FRACTIONS ± 1/64 ANGLES ± 1°
DO NOT SCALE THIS PRINT	
THIS PRINT ISSUED	
DWG. SIZE	A
DRAWING NO.	A1-7/153 D

SUB-ASS'Y COVER (SHEET 1 OF 2)

SHEET 11 OF

Figure 27(1).

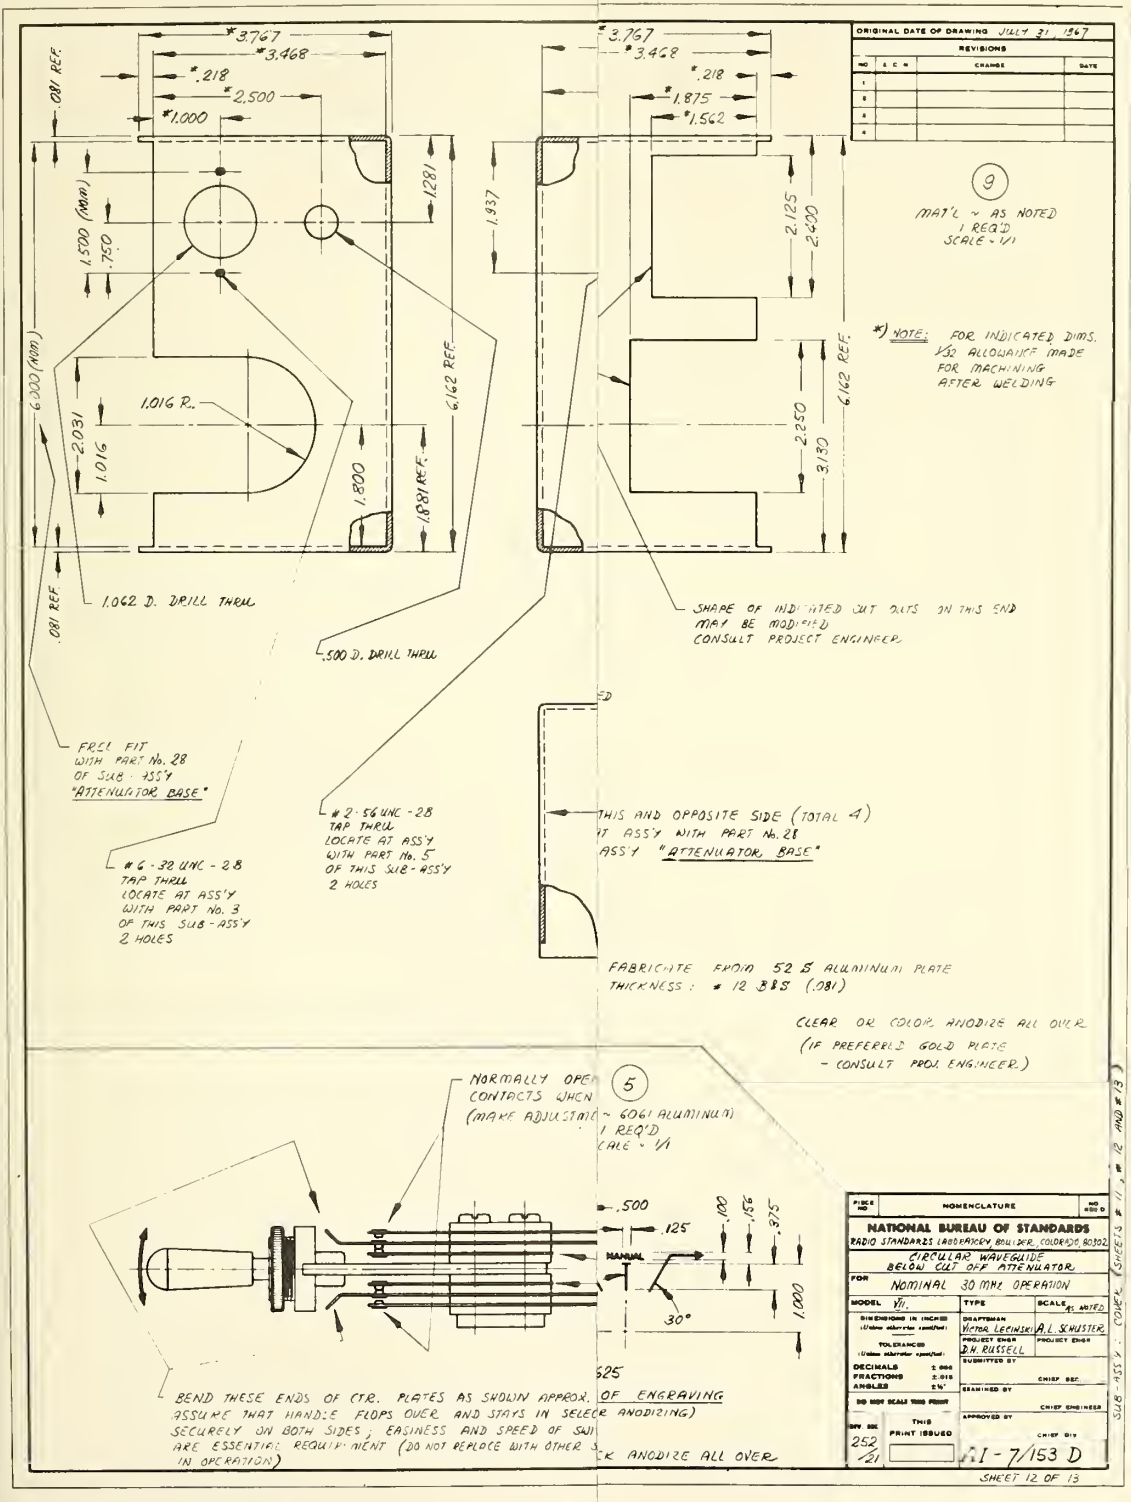
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO. | L C M | CHANGE | DATE
3.767
3.468
.218
2.500
1.000
.081 REF.
1.500 (MIN.)
.750
1.281
6.000 (NOM.)
2.031
1.016
1.016 R.
1.800
1.881 REF.
6.162 REF.
1.937
1.875
1.562
2.125
2.400
2.250
3.130
9
MAT'L ~ AS NOTED
1 REQ'D
SCALE ~ 1/1
*) NOTE: FOR INDICATED DIMS. 1/32 ALLOWANCE MADE FOR MACHINING AFTER WELDING
1.062 D. DRILL THRU
.500 D. DRILL THRU
SHAPE OF INDICATED CUT OUTS ON THIS END MAY BE MODIFIED CONSULT PROJECT ENGINEER
FREE FIT WITH PART No. 28 OF SUB-ASS'Y "ATTENUATOR BASE"
#2-56 UNC-2B TAP THRU LOCATE AT ASS'Y WITH PART No. 5 OF THIS SUB-ASS'Y 2 HOLES
#6-32 UNC-2B TAP THRU LOCATE AT ASS'Y WITH PART No. 3 OF THIS SUB-ASS'Y 2 HOLES
THIS AND OPPOSITE SIDE (TOTAL 4) IT ASS'Y WITH PART No. 28 ASS'Y "ATTENUATOR, BASE"
FABRICATE FROM 52 S ALUMINUM PLATE THICKNESS: # 12 B&S (.081)
CLEAR OR COLOR ANODIZE ALL OVER (IF PREFERRED GOLD PLATE - CONSULT PROJ. ENGINEER.)
5
~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
.500
.125
.100
.156
.375
1.000
30°
.625
BEND THESE ENDS OF CTR. PLATES AS SHOWN APPROX. ASSURE THAT HANDLE FLOPS OVER AND STAYS IN SELECTED POSITION SECURELY ON BOTH SIDES; EASINESS AND SPEED OF SWITCHING ARE ESSENTIAL REQUIREMENT (DO NOT REPLACE WITH OTHER TYPE OF ENGRAVING IN OPERATION)
ANODIZING)
CK ANODIZE ALL OVER
PIECE NO. | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO, 80302
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MM. OPERATION
MODEL VII. | TYPE | SCALE AS NOTED
DIMENSIONS IN INCHES (Unless otherwise specified)
TOLERANCES (Unless otherwise specified)
DECIMALS ± .005
FRACTIONS ± .015
ANGLES ± ½°
DRAFTSMAN Victor Lecinski
PROJECT ENGR D.H. RUSSELL
SUBMITTED BY
A.I. SCHUSTER
PROJECT ENGR
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
DO NOT SCALE THIS PRINT
APPROVED BY
CHIEF DIV.
DIV. NO. 252 / 21
THIS PRINT ISSUED
A I - 7/153 D
SHEET 12 OF 13
SUB-ASS'Y: COVER (SHEETS # 11, # 12 AND # 13)

Figure 27(m).

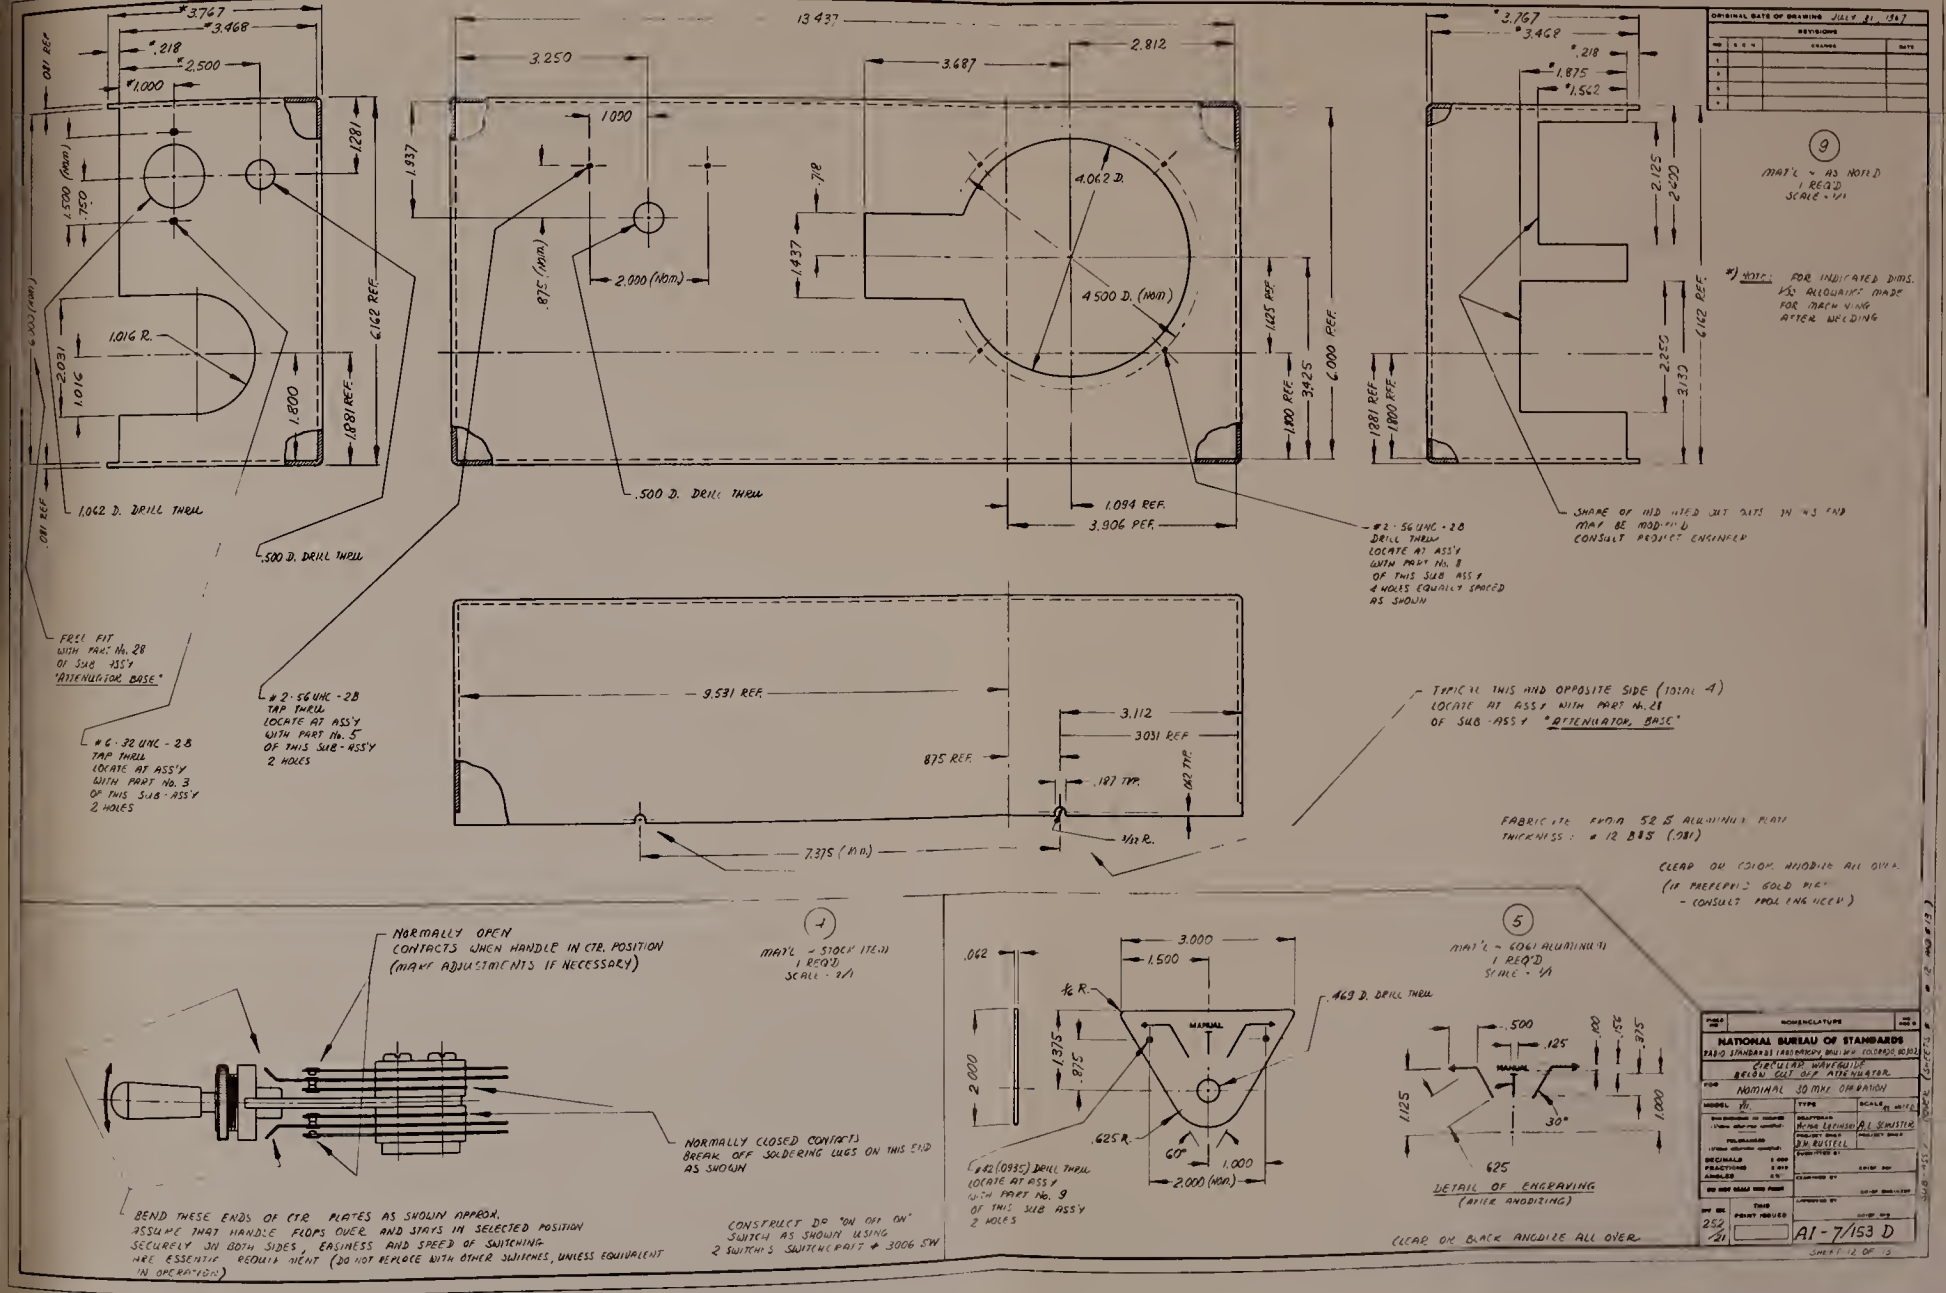
NATIONAL BUREAU OF STANDARDS
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
NOMINAL 30 MKC ATTENUATION
AI-7/153 D
NORMALLY OPEN CONTACTS WHEN HANDLE IN CTR. POSITION (MAKE ADJUSTMENTS IF NECESSARY)
NORMALLY CLOSED CONTACTS BREAK OFF SOLDERING LUGS ON THIS END AS SHOWN
BEND THESE ENDS OF CTR. PLATES AS SHOWN APPROX. ASSURE THAT HANDLE FLOPS OVER AND STAYS IN SELECTED POSITION SECURELY IN BOTH SIDES, EASINESS AND SPEED OF SWITCHING ARE ESSENTIAL REQUIREMENT (DO NOT REPLACE WITH OTHER SWITCHES, UNLESS EQUIVALENT IN OPERATION)
CONSTRUCT DP "ON OFF ON" SWITCH AS SHOWN USING 2 SWITCHES SWITCH PART # 3006 SW
DETAIL OF ENGRAVING (AFTER ANODIZING)
CLEAR OR BLACK ANODIZE ALL OVER
FABRICATE FROM 52 S ALUMINUM PLATE THICKNESS: # 12 B&S (.081)
CLEAR OR COLOR ANODIZE ALL OVER (IF PREFERRED GOLD PLATE - CONSULT PROJECT ENGINEER)
TYPICAL THIS AND OPPOSITE SIDE (TOTAL 4) LOCATE AT ASS'Y WITH PART No. 28 OF SUB-ASS'Y "ATTENUATOR BASE"
FREE FIT WITH PART No. 28 OF SUB ASS'Y "ATTENUATOR BASE"
#2-56 UNC-2B TAP THRU LOCATE AT ASS'Y WITH PART No. 5 OF THIS SUB-ASS'Y 2 HOLES
#6-32 UNC-2B TAP THRU LOCATE AT ASS'Y WITH PART No. 3 OF THIS SUB-ASS'Y 2 HOLES
#2-56 UNC-2B DRILL THRU LOCATE AT ASS'Y WITH PART No. 8 OF THIS SUB ASS'Y 4 HOLES EQUALLY SPACED AS SHOWN
SHAPE OF INDICATED CUT OUTS IN THIS END MAY BE MODIFIED CONSULT PROJECT ENGINEER
#42 (.0935) DRILL THRU LOCATE AT ASS'Y WITH PART No. 9 OF THIS SUB ASS'Y 2 HOLES
.500 D. DRILL THRU
1.062 D. DRILL THRU
1.094 REF.
3.906 REF.
9.531 REF.
7.375 (NOM.)
4.062 D.
4.500 D. (NOM.)
2.000 (NOM.)
13.437
3.250
3.687
2.812
1.016 R.
.469 D. DRILL THRU
MANUAL
60°
30°
.625
1.000
2.000 (NOM.)
1.375
.875
.625 R.
1/32 R.
.187 TYP.
.062 TYP.
3.112
3.031 REF.
875 REF.
6.162 REF.
6.000 REF.
3.425
2.031
1.016
1.800
1.281 REF.
1.937
1.500 (NOM.)
.750
1.218
2.500
3.767
3.468
1.000
1.875
1.562
2.125
2.420
2.255
3.130
.781
1.437
1.125 REF.
1.800 REF.
.875 (NOM.)
.031 REF.
.300 (NOM.)
.062
1.500
3.000
.500
.125
.100
.150
.375
1.125
.625
1.000
1/2 R.
(1) MAT'L - STOCK ITEM 1 REQ'D SCALE - 2/1
(5) MAT'L - 6061 ALUMINUM 1 REQ'D SCALE - 1/1
(9) MAT'L - AS NOTED 1 REQ'D SCALE - 1/1
*) NOTE: FOR INDICATED DIMS. 1/32 ALLOWANCE MADE FOR MACHINING AFTER WELDING
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
SHEET 2 OF 2

Figure 27(m).

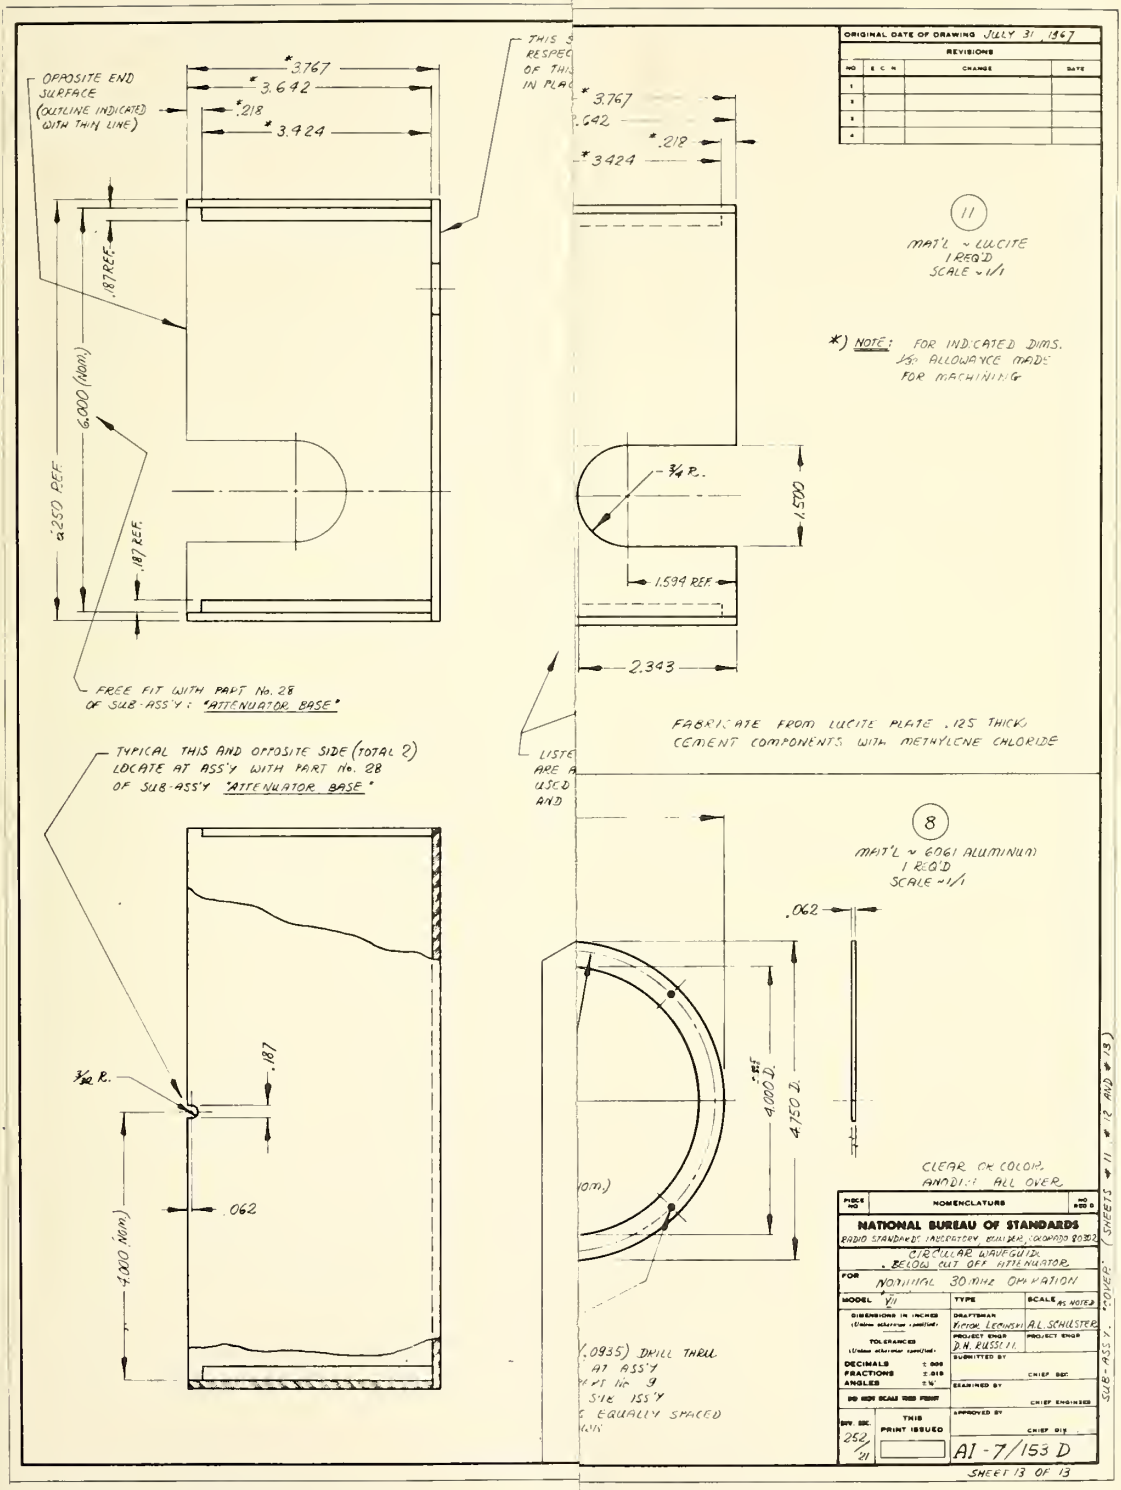
ORIGINAL DATE OF DRAWING JULY 31, 1967
REVISIONS
NO | E C N | CHANGE | DATE
OPPOSITE END SURFACE (OUTLINE INDICATED WITH THIN LINE)
*3.767
*3.642
*.218
*3.424
.187 REF.
6.000 (NOM.)
4.250 REF.
.187 REF.
FREE FIT WITH PART No. 28 OF SUB-ASS'Y: "ATTENUATOR BASE"
11
MAT'L ~ LUCITE
1 REQ'D
SCALE ~ 1/1
*) NOTE: FOR INDICATED DIMS. USE ALLOWANCE MADE FOR MACHINING
3/4 R.
1.500
1.594 REF.
2.343
FABRICATE FROM LUCITE PLATE .125 THICK
CEMENT COMPONENTS WITH METHYLENE CHLORIDE
TYPICAL THIS AND OPPOSITE SIDE (TOTAL 2) LOCATE AT ASS'Y WITH PART No. 28 OF SUB-ASS'Y "ATTENUATOR BASE"
3/32 R.
.187
.062
4.000 (NOM.)
8
MAT'L ~ 6061 ALUMINUM
1 REQ'D
SCALE ~ 1/1
.062
4.000 REF.
4.750 L.
CLEAR OR COLOR ANODIZE ALL OVER
(.0935) DRILL THRU AT ASS'Y
PART No. 9
SIZE ASS'Y
EQUALLY SPACED
PIECE NO | NOMENCLATURE | NO REQ'D
NATIONAL BUREAU OF STANDARDS
RADIO STANDARDS LABORATORY, BOULDER, COLORADO 80302
CIRCULAR WAVEGUIDE BELOW CUT OFF ATTENUATOR
FOR NOMINAL 30 MHz ATTENUATION
MODEL VII
TYPE
SCALE AS NOTED
DIMENSIONS IN INCHES
TOLERANCES
DECIMALS ± .005
FRACTIONS ± .015
ANGLES ± ½°
DO NOT SCALE THIS PRINT
DRAFTSMAN VIPIN LEONARD
PROJECT ENGR D.H. RUSSELL
SUBMITTED BY
CHIEF SEC.
EXAMINED BY
CHIEF ENGINEER
APPROVED BY
CHIEF DIV.
DIV. SEC. 252/21
THIS PRINT ISSUED
A1-7/153 D
SHEET 13 OF 13
SUB-ASS'Y. "COVER" (SHEETS # 11, # 12 AND # 13)

Figure 27(n).

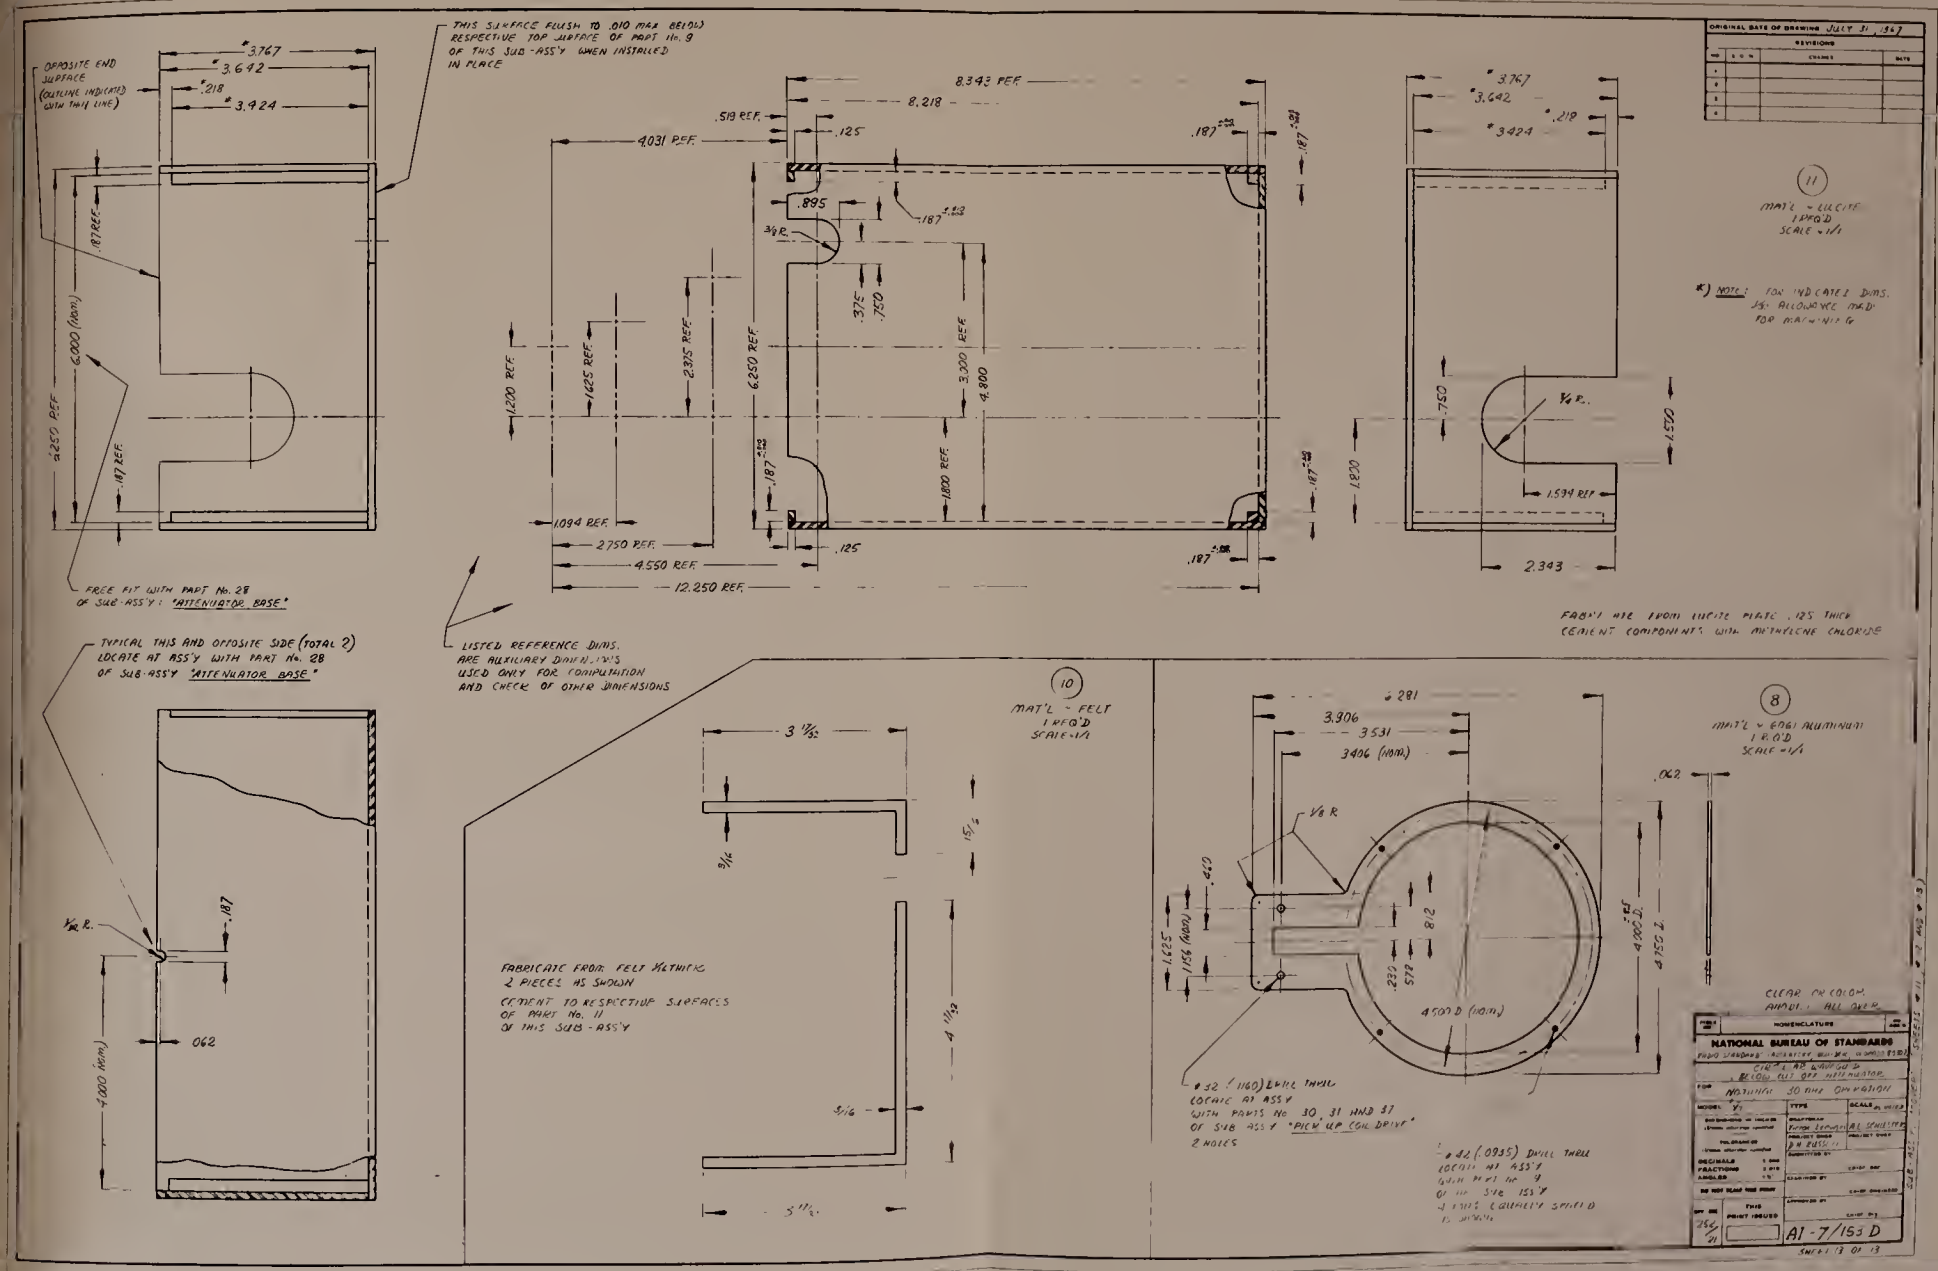
ORIGINAL DATE OF DRAWING JULY 31 1967
REVISIONS
NO. DASH ZONE LTR/NUM DESCRIPTION DATE
OPPOSITE END SURFACE (OUTLINE INDICATED WITH THIN LINE)
THIS SURFACE FLUSH TO .010 MAX BELOW RESPECTIVE TOP SURFACE OF PART No. 9 OF THIS SUB-ASS'Y WHEN INSTALLED IN PLACE
3.767
3.642
.218
3.924
.87 REF.
6.000 (NOM.)
6.250 REF.
.187 REF.
FREE FIT WITH PART No. 28 OF SUB-ASS'Y: "ATTENUATOR BASE"
8.343 REF.
8.218
.519 REF.
.125
9.031 REF.
.187 +.010 -.000
.895
.187 +.010 -.000
3/8 R.
.375
.750
1.200 REF.
1.625 REF.
2.375 REF.
6.250 REF.
3.300 REF.
4.900
1.800 REF.
.187 +.010 -.000
1.094 REF.
2.750 REF.
4.550 REF.
12.250 REF.
.125
.187 +.010 -.000
.187 +.010 -.000
.187 +.010 -.000
1.830
.750
1.550
1/4 R.
1.594 REF.
2.343
(11)
MAT'L - LUCITE
1 REQ'D
SCALE - 1/1
*) NOTE: FOR IND CATED DIMS. .015 ALLOWANCE MADE FOR MACHINING
FABR'T USE ANOTHER LUCITE PLATE .125 THICK CEMENT COMPONENTS WITH METHYLENE CHLORIDE
TYPICAL THIS AND OPPOSITE SIDE (TOTAL 2) LOCATE AT ASS'Y WITH PART No. 28 OF SUB-ASS'Y "ATTENUATOR BASE"
1/32 R.
.187
.062
4.000 (NOM.)
LISTED REFERENCE DIMS. ARE AUXILIARY DIMENSIONS USED ONLY FOR COMPUTATION AND CHECK OF OTHER DIMENSIONS
(10)
MAT'L - FELT
1 REQ'D
SCALE - 1/1
3 1/32
9/16
15/16
4 1/32
9/16
5 1/32
FABRICATE FROM FELT 3/16 THICK
2 PIECES AS SHOWN
CEMENT TO RESPECTIVE SURFACES OF PART No. 11 OF THIS SUB-ASS'Y
ø.281
3.306
3.531
3.406 (NOM.)
1/8 R
.619
1.225
1.155 (NOM.)
.230
.572
8.2
4.500 D (NOM.)
4.000 D
4.750 D
.062
ø.32 (.1160) DRILL THRU LOCATE AT ASS'Y WITH PARTS No. 30, 31 AND 37 OF SUB ASS'Y "PICK UP COIL DRIVE" 2 HOLES
ø.82 (.0935) DRILL THRU LOCATE AT ASS'Y WITH PART No. 9 OF THE SUB ASS'Y 4 HOLES EQUALLY SPACED
(8)
MAT'L - ENGR ALUMINUM
1 REQ'D
SCALE - 1/1
CLEAR ON COLOR ANODIZE ALL OVER
NOMENCLATURE
NATIONAL BUREAU OF STANDARDS
CUT 2 AS SHOWN BELOW CUT OFF ATTENUATOR
NOTHING TO BE MACHINED
MODEL Y1
TYPE
SCALE 2/1
DRAWN BY
TRACED BY
CHECKED BY
APPROVED BY
ORIGINALS 1 DEC
FRACTIONS 1/64
ANGLES 1°
DO NOT SCALE THIS PRINT
THIS PRINT ISSUED
A1-7/153 D
SHEET 13 OF 13

Figure 27(n).

6. References

[1] R.W. Beatty, Microwave impedance measurements and standards, NBS (U.S.) Monogr. 82, 32 pages (August 1965).

[2] W.J. Anson, A guide to the use of the modified reflectometer technique of VSWR measurement, J. of Res. Eng. and Instr., Vol. 65C, No. 4, pp. 217-222, Oct.-Dec. 1961.

[3] W.E. Little and D.A. Ellerbruch, Precise reflection coefficient measurements with the untuned reflectometer, J. Res. NBS, (U.S.) Vol. 70 C, (Eng. and Instr.) 165-168 (July-Sept. 1966).

[4] R. W. Beatty, and W. J. Anson, Table of magnitude of reflection coefficient versus return loss $\left[L_R = 20 \log_{10} \frac{1}{|\Gamma|}\right]$, NBS Tech. Note 72, Sept. 19, 1960.

[5] M. Sucher and J. Fox (editors), Handbook of Microwave Measurements, Vol. I, pp. 103-105 (Polytechnic Press of the Polytechnic Institute of Brooklyn, 1963).

[6] R. W. Beatty, Microwave attenuation measurements and standards, NBS (U.S.) Monogr. 97, 48 pages (April 3, 1967).

[7] M.H. Zanboorie, A semi-automatic technique for tuning a reflectometer, IEEE Trans. on Microwave Theory and Techniques (correspondence), Vol. MTT-13, pp. 709-710, Sept. 1965.

[8] D.M. Kerns and W.T. Grandy, Jr., Perturbation theorems for waveguide junctions, with applications, IEEE Trans. on Microwave Theory and Techniques, Vol. MTT-14, pp. 85-92, Feb. 1966.

[9] R.W. Beatty, Mismatch errors in the measurement of ultra-high frequency and microwave variable attenuators, J. of Res., NBS, Vol. 52, No. 1, pp. 7-9, Jan. 1954.

[10] D. Russel and W. Larson, RF Attenuation, Proc. of IEEE, Vol. 55, No. 6, pp. 942-959, June 1967.

[11] C.G. Montgomery (editor), Technique of Microwave Measurements, MIT Rad. Lab. Series 11, p. 830 (McGraw-Hill Book Co., Inc., New York, N.Y., 1947).

[12] M.B. Hall, N.T. Larsen, and W.E. Little, Combination rf radiation and fluid pressure seal, Proc. IEEE, Vol. 54, No. 11, pp. 1585-1586, Nov. 1966.

[13] W.E. Little, W. Larson, and B.J. Kinder, Rotary-vane attenuator with an optical readout, J. of Res. NBS (U.S.), Vol. 75C, (Eng. and Instr.) No. 1, 1-5, (Jan.-March 1971).

[14] R.W. Beatty and D.M. Kerns, Recently developed microwave impedance standards and methods of measurement, IRE Trans. on Instr., Vol. 1-7, pp. 319-321, Dec. 1958.

[15] R.W. Beatty and B.C. Yates, A graph of return loss versus frequency for quarter-wavelength short-circuited waveguide impedance standards, IEEE Trans. on Microwave Theory and Tech MTT-17, No. 5, pp. 282-284, May 1969.

[16] T.Y. Otoshi, C.T. Stelzried, B.C. Yates, and R.W. Beatty, Comparisons of waveguide losses calibrated by the dc potentiometer, AC ratio transformer, and reflectometer techniques, IEEE Trans. on Microwave Theory and Tech. MTT-18 No. 7, pp. 406-409, July 1970.

[17] R. W. Beatty, A two-channel nulling method for measuring attenuation constants of short sections of waveguide and the losses in waveguide joints, Proc. IEEE, Vol. 53, No. 6, pp. 642-643, June 1965.

[18] B.C. Yates and W.E. Little, Complex reflection coefficient standards, to be published.

[19] D.M. Kerns, Half-round inductive obstacles in rectangular waveguide, J. Res. NBS (U.S.), Vol. 64B (Math. Sci.), 113-130, (Apr.-June, 1960).

[20] N. Marcuvitz, Waveguide Handbook, MIT Rad. Lab. Series 10, New York, (McGraw-Hill Book Co., Inc., 1951).

[21] L. Lewin, Standard Mismatch-the Production of Controlled Small Reflections in Waveguides, J. Res. NBS (U.S.), 72C (Eng. and Instr.), No. 4, 197-201 (July-Sept. 1968).

[22] R.W. Beatty, Impedance of Uniconductor Waveguide, Proc. of IEEE, Vol. 55, No. 6, pp. 933-941, June 1967.

[23] D.E. Harnett and N.P. Case, The design and testing of multirange receivers, Proc. IRE 23, 578-593, June 1935.

[24] R.E. Grantham and J.J. Freeman, A standard of attenuation for microwave measurements, Trans. AIEE 67, 329-335, June 1948.

[25] W. Larson, Inline waveguide attenuator (correspondence), IEEE Trans. on Microwave Theory and Tech. MTT-12, pp. 367-368, May 1964.

[26] W. Larson, Analysis of rotation errors of a waveguide rotary vane attenuator, IRE International Convention Record, Pt. 3, pp. 213-219, 1962.

[27] W. Larson, Table of attenuation error as a function of vane-angle error for rotary vane attenuators, NBS (U.S.) Tech. Note 177, 154 pages, (May 1963).

[28] P.F. Mariner, An absolute microwave attenuator, Proc. IEEE (London) 109, Pt. B, pp. 415-419, Sept. 1962.

[29] D.M. Kerns and R.W. Beatty, Basic Theory of Waveguide Junctions and Introductory Microwave Network Analysis (Pergamon Press, New York, N.Y. 1967).

[30] J.L. Altman, Microwave Circuits, pp. 393-395 (D. Van Nostrand Co., New York, N.Y., 1964).

[31] R.W. Beatty, A Guide to the Measurement of Reflection Coefficient and Impedance in Waveguides and Transmission Lines, to be published by NBS.

FORM NBS-114A (1-71)

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET	1. PUBLICATION OR REPORT NO. Technical Note 619	2. Gov't Accession No.	3. Recipient's Accession No.

4. TITLE AND SUBTITLE

Millimeter Attenuation and Reflection Coefficient Measurement System

5. Publication Date

July 1972

6. Performing Organization Code

7. AUTHOR(S)

B. C. Yates and W. Larson

8. Performing Organization

9. PERFORMING ORGANIZATION NAME AND ADDRESS

NATIONAL BUREAU OF STANDARDS, Boulder Labs
DEPARTMENT OF COMMERCE
Boulder, Colo. 80302

10. Project/Task/Work Unit No.

2724203

11. Contract/Grant No.

12. Sponsoring Organization Name and Address

Same as Item 9.

13. Type of Report & Period Covered

14. Sponsoring Agency Code

15. SUPPLEMENTARY NOTES

16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.)

This paper presents the details to implement a WR 15 attenuation and reflection coefficient magnitude measurement system. A discussion of precision and of systematic error is given along with equations for estimating limits of the error. Machine drawings are provided to fabricate the waveguide standards and necessary hardware not commercially available.

17. KEY WORDS (Alphabetical order, separated by semicolons)

Attenuation; Measurement system; Millimeter; Reflection coefficient, VSWR.

18. AVAILABILITY STATEMENT

[x] UNLIMITED.

[ ] FOR OFFICIAL DISTRIBUTION. DO NOT RELEASE TO NTIS.

19. SECURITY CLASS (THIS REPORT)

UNCLASSIFIED

21. NO. OF PAGES

175

20. SECURITY CLASS (THIS PAGE)

UNCLASSIFIED

22. Price

$1.50

USCOMM-DC 66244-P71

GPO 843-517

NBS TECHNICAL PUBLICATIONS

PERIODICALS

JOURNAL OF RESEARCH reports National Bureau of Standards research and development in physics, mathematics, and chemistry. Comprehensive scientific papers give complete details of the work, including laboratory data, experimental procedures, and theoretical and mathematical analyses. Illustrated with photographs, drawings, and charts. Includes listings of other NBS papers as issued.

Published in two sections, available separately:

- **Physics and Chemistry**

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, $9.50; $2.25 additional for foreign mailing.

- **Mathematical Sciences**

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables. Issued quarterly. Annual subscription: Domestic, $5.00; $1.25 additional for foreign mailing.

TECHNICAL NEWS BULLETIN

The best single source of information concerning the Bureau's measurement, research, developmental, cooperative, and publication activities, this monthly publication is designed for the industry-oriented individual whose daily work involves intimate contact with science and technology---*for engineers, chemists, physicists, research managers, product-development managers, and company executives.* Includes listing of all NBS papers as issued. Annual subscription: Domestic, $3.00; $1.00 additional for foreign mailing.

Bibliographic Subscription Services

The following current-awareness and literature-survey bibliographies are issued periodically by the Bureau: Cryogenic Data Center Current Awareness Service (weekly), Liquefied Natural Gas (quarterly), Superconducting Devices and Materials (quarterly), and Electromagnetic Metrology Current Awareness Service (monthly). Available only from NBS Boulder Laboratories. Ordering and cost information may be obtained from the Program Information Office, National Bureau of Standards, Boulder, Colorado 80302.

NONPERIODICALS

Applied Mathematics Series. Mathematical tables, manuals, and studies.

Building Science Series. Research results, test methods, and performance criteria of building materials, components, systems, and structures.

Handbooks. Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications. Proceedings of NBS conferences, bibliographies, annual reports, wall charts, pamphlets, etc.

Monographs. Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

National Standard Reference Data Series. NSRDS provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated.

Product Standards. Provide requirements for sizes, types, quality, and methods for testing various industrial products. These standards are developed cooperatively with interested Government and industry groups and provide the basis for common understanding of product characteristics for both buyers and sellers. Their use is voluntary.

Technical Notes. This series consists of communications and reports (covering both other-agency and NBS-sponsored work) of limited or transitory interest.

Federal Information Processing Standards Publications. This series is the official publication within the Federal Government for information on standards adopted and promulgated under the Public Law 89–306, and Bureau of the Budget Circular A–86 entitled, Standardization of Data Elements and Codes in Data Systems.

Consumer Information Series. Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

CATALOGS OF NBS PUBLICATIONS

NBS Special Publication 305, Publications of the NBS. 1966-1967. When ordering, include Catalog No. C13.10:305. Price $2.00; 50 cents additional for foreign mailing.

NBS Special Publication 305, Supplement 1, Publications of the NBS, 1968-1969. When ordering, include Catalog No. C13.10:305/Suppl. 1. Price $4.50; $1.25 additional for foreign mailing.

NBS Special Publication 305, Supplement 2, Publications of the NBS, 1970. When ordering, include Catalog No. C13.10:305/Suppl. 2. Price $3.25; 85 cents additional for foreign mailing.

Order NBS publications (except Bibliographic Subscription Services) from: Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.

U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards
Washington, D.C. 20234

OFFICIAL BUSINESS

Penalty for Private Use, $300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE
215

1298